

UNITS: INCHES

FRAME SIZE	MOTOR DIMENSIONS										CONDUIT BOX							
	A	B	C	D	G	J	K	M	O	P	T	MAXIMUM	AB	AC	AE	AF	XL	XN
5810USS	28.0	42.2	72.5	14.50	1.6	6.3	9.3	27.6	30.5	31.6	5.1	4.00	31.1	23.8	14.5	9.3	23.4	14.2
5810US	28.0	42.2	72.3	14.50	1.6	6.3	9.3	27.6	30.5	31.6	5.1	4.00	31.1	23.8	14.5	9.3	23.4	14.2
5810UZ	28.0	42.2	77.6	14.50	1.6	6.3	9.3	27.6	30.5	31.6	5.1	4.00	31.1	23.8	14.5	9.3	23.4	14.2
FRAME SIZE	MOUNTING				SHAFT EXTENSION			KEY SEAT				BEARINGS			MAXIMUM WEIGHT			
	E	ZF	H	BA	N-W	V	U	R	S	ES	LS	OS						
5810USS	11.50	36.00/32.00	1.2	10.00	6.75	6.50	2.375	2.021	0.625	5.00	6.313C3	NU313C3	7800	lbs.				
5810US	11.50	36.00/32.00	1.2	10.00	6.25	6.19	3.625	3.134	0.875	5.00	6.320C3	6320C3	7800	lbs.				
5810UZ	11.50	36.00/32.00	1.2	10.00	11.62	11.38	5.250	4.550	1.250	10.00	NU328C3	6320C3	7800	lbs.				

TAG NO's: _____

CUSTOMER: _____ MOTOR MODEL NO.: _____
 P.O. NO.: _____ HP: _____ VOLTAGE: _____ RPM(SYN.): _____ Hz: _____
 FRAME SIZE: _____ PRODUCT TYPE: IEFEC EGP III, EPACK, & HIGH EFFICIENCY QUARRY DUTY
 COMMENTS: _____

 PER: _____ DATE: _____

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT AND THE DATA MAY CHANGE WITHOUT NOTICE PRELIMINARY
 DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS MARKED AS CERTIFIED CERTIFIED

- STANDARD (NO AUX. BOXES)
- RTD AUX. BOX
- SPACE HEATER AUX. BOX
- BEARING RTD's

- NOTES:
- DIMENSION V REPRESENTS LENGTH OF STRAIGHT PART OF SHAFT
 - MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS
 - KEY DIMENSIONS EQUAL S x S x 10.00 FOR UZ AND S x S x 5.00 FOR USS & US (MOTOR SUPPLIED WITH KEY)
 - MOTOR WEIGHT SHOWN IS MAXIMUM HORSEPOWER IN FRAME
 - THIS DIMENSION EQUALS ZF FOR 5809USS/US/UZ MOUNTING
 - STANDARD PRODUCT USE BI-DIRECTIONAL FAN, OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE

TOSHIBA
 TOSHIBA INTERNATIONAL CORPORATION

TOTALLY-ENCLOSED FAN-COOLED
 HORIZONTAL FOOT-MOUNTED
 3 PHASE INDUCTION MOTOR
 F1 ASSEMBLY

XT SERIES
 VISIT OUR WEBSITE AT:
 www.toshiba.com/ind

TYPICAL MOTOR PERFORMANCE DATA

Model: F5006FLF4BMQ

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
500	373	6	1192	5810UZ	460	60	3	646
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	54	F	1.15	CONT	95.6	-	H	40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	500	372.9	645.3	95.6	75.9
¾ Load	375.00	279.6	514.2	95.2	71.7
½ Load	250.00	186.4	398.5	94.1	62.4
¼ Load	125.00	93.2	310.9	90.5	41.6
No Load			286.4		2.5
Locked Rotor			4334.80		27.2

Torque				Rotor wk ² Inertia (lb-ft ²)
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	
2203	205	145	295	400.34

Safe Stall Time(s)		Sound Pressure dB(A) @ 1M	Bearings*		Approx. Motor Weight (lbs)
Cold	Hot		DE	NDE	
14.3	7	-	NU328C3	6320C3	

*Bearings are the only recommended spare part(s).

Motor Options:
Product Family:Quarry
Mounting:Footed,Shaft:UZ Shaft

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.


Engineering	bmmamen	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0
Engr. Date	7/22/2014	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011

SPEED TORQUE/CURRENT CURVE

Model: F5006FLF4BMQ

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
500	373	6	1192	5810UZ	460	60	3	646
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	54	F	1.15	CONT	95.6	-	H	40 C
Locked Rotor Amps	Rotor wk ² Inertia (lb-ft ²)	Torque						Break Down (%)
		Full Load (lb-ft)	Locked Rotor (%)	Pull Up (%)				
4334.80	400.34	2203	205	145			295	

Design Values

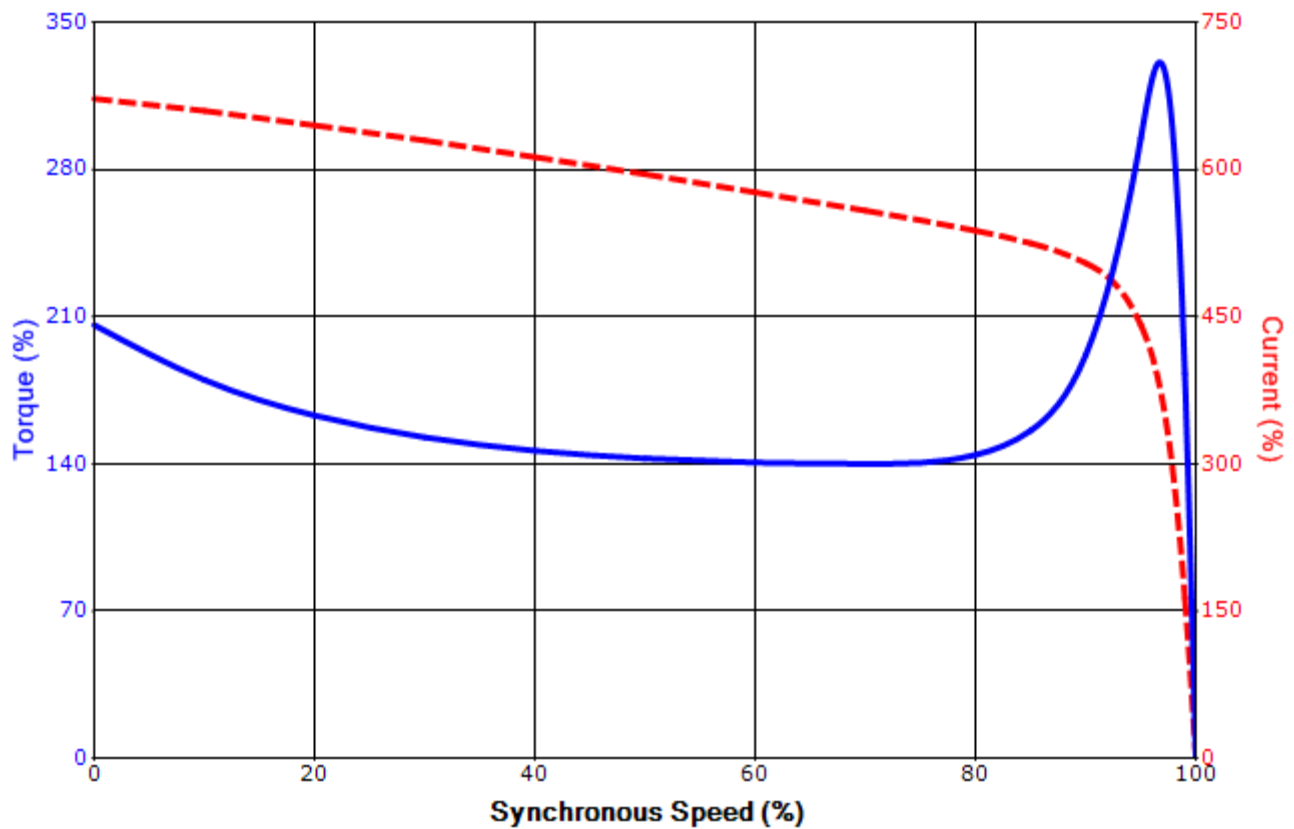

Customer		wk ² Load Inertia (lb-ft ²)	-
Customer PO		Load Type	-
Sales Order		Voltage (%)	100
Project #		Accel. Time	-

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

Engineering	bmammen	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121 / 0
Engr. Date	7/22/2014	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011

Motor Connection Diagram
3 Leads - Delta Connection



Switch L1 and L2 to reverse rotation

Each lead may consist of more than one cable.
If multiple cables represent a single lead, each one
of them will be labeled with the appropriate lead number.