

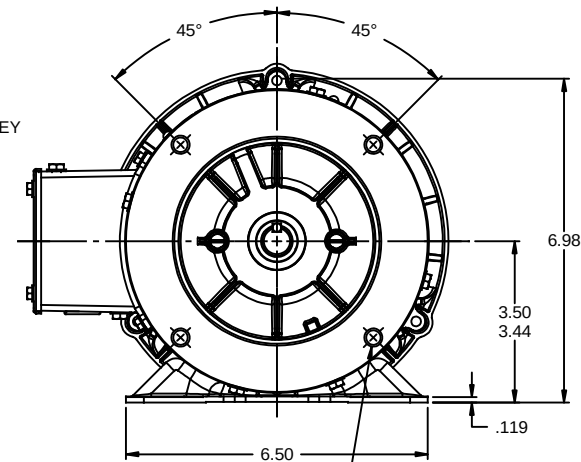
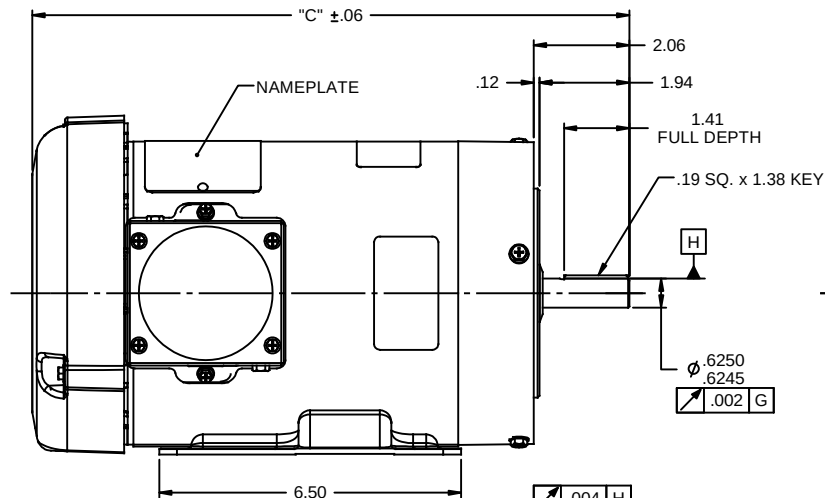


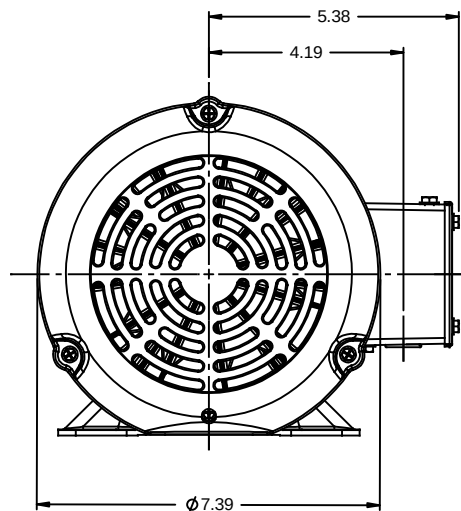

3/8-16 UNC-2B x .56 DEEP
(4) REQ'D. ON A Ø5.875 B.C.

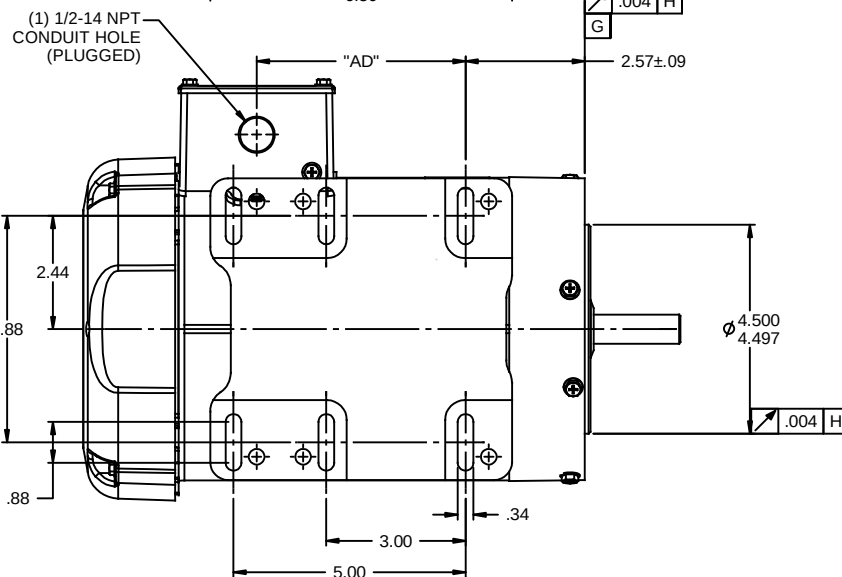


WASHGUARD MOTOR

SPECIAL FEATURES:

1. SHAFT SEALS & V-RING.
2. PLUGGED DRAIN HOLES IN ENDBELLS & CONDUIT BOX.
3. BUNA-N GASKETS THROUGHOUT.
4. STAINLESS STEEL SHAFT, HARDWARE & NAMEPLATE.

DASH NO.	"C"	"AD"
700	12.87	4.50
725	13.12	4.75
750	13.37	5.00
775	13.62	5.25
800	13.87	5.50
825	14.12	5.75
850	14.37	6.00

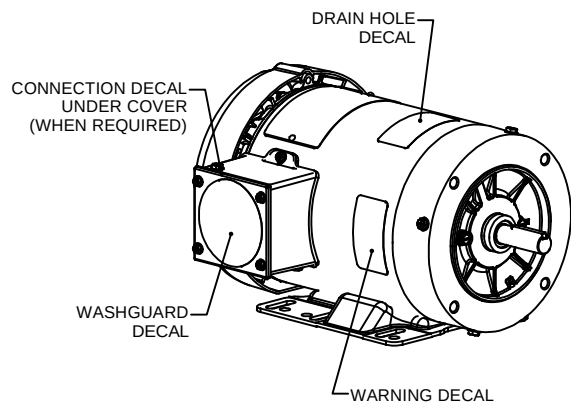

TOLERANCES UNLESS SPECIFIED				ELECTRIC MOTORS GEARMOTORS AND DRIVES		DRAWN PG 02/08/11	
DEC	INCHES					CHK	
X	±.1					APPR	
XX	±.03			TITLE	OUTLINE - 56HC FRAME	SCALE	3/8
XXX	±.005				TEFC - RIGID "C" FACE	REF	028812
XXXX	±.0005			MATL	WASHGUARD	FMF	115745.00
NO	REVISION	BY & DATE	CHK ANG ±1/2"	FINISH		PAGE	OF
	THIRD ANGLE PROJECTION		RFP	PREV		SIZE	DRAWING NO
			NETWORK FILE NAME	607-0004		B	607-0004
						REV	