

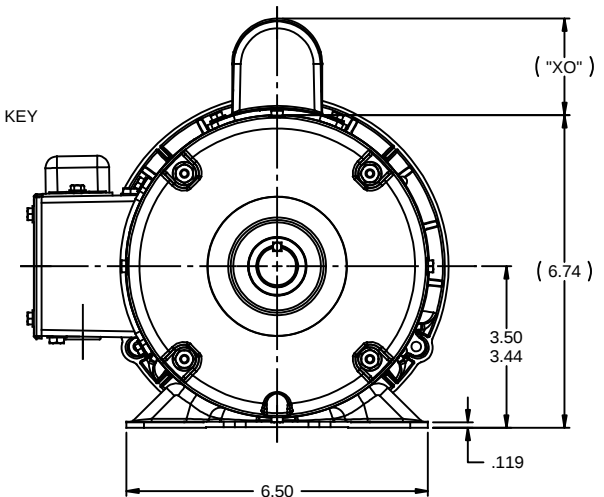
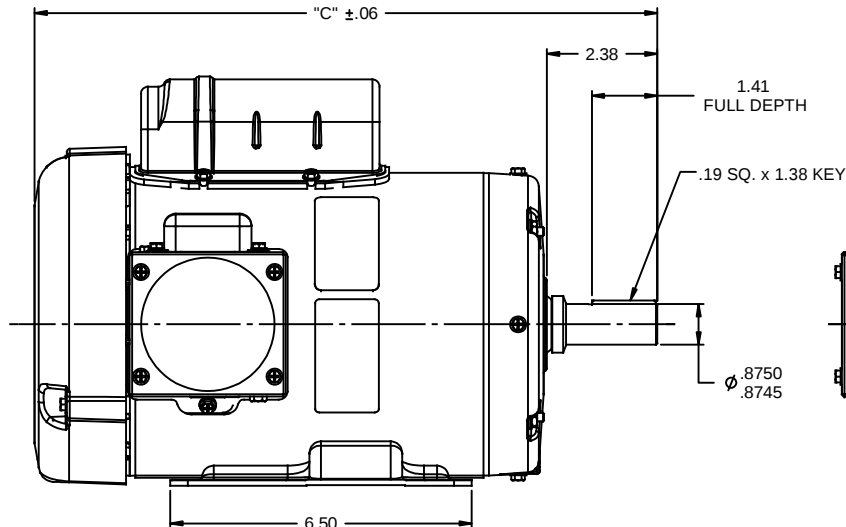


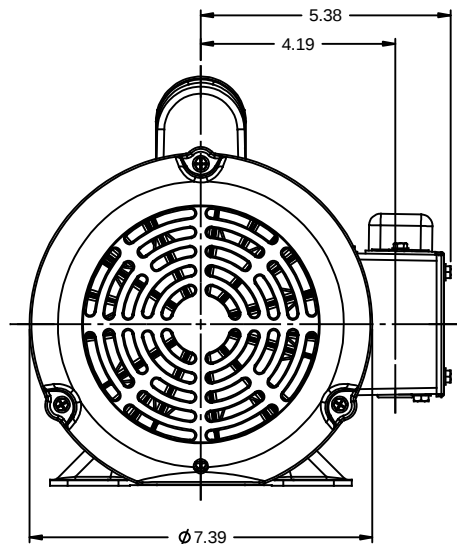


(1) 1/2-14 NPT CONDUIT HOLE (PLUGGED)

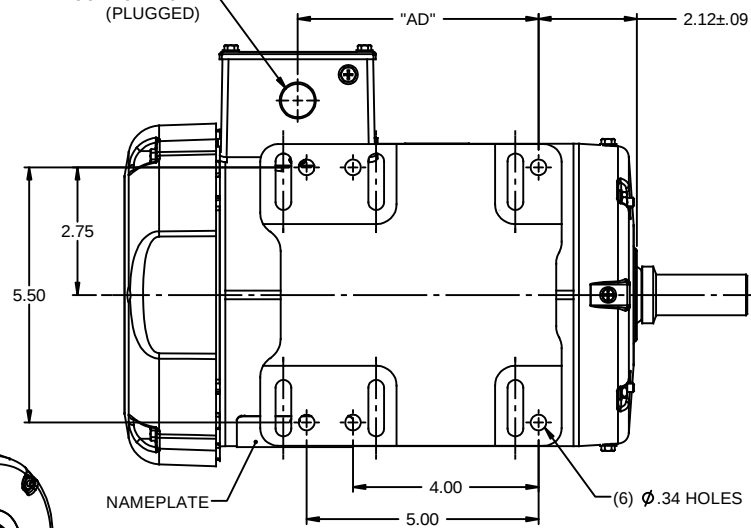

WASHGUARD MOTOR

SPECIAL FEATURES:

1. SHAFT SEALS & V-RING.
2. PLUGGED DRAIN HOLES IN ENDBELLS & CONDUIT BOX.
3. BUNA-N GASKETS THROUGHOUT.
4. STAINLESS STEEL SHAFT, HARDWARE & NAMEPLATE.
5. SOLID STATE SWITCH MOUNTED TO CONDUIT BOX.

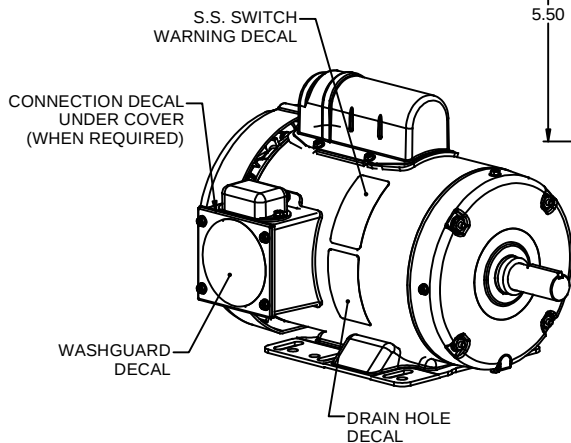

DASH NO.	"C"	"AD"	"XO"
650A	12.43	4.19	2.00
700A	12.93	4.69	2.00
750A	13.43	5.19	2.00
800A	13.93	5.69	2.00

DASH NO.	"C"	"AD"	"XO"
650B	12.43	4.19	2.25
700B	12.93	4.69	2.25
750B	13.43	5.19	2.25
800B	13.93	5.69	2.25

TOLERANCES UNLESS SPECIFIED				DRAWN PG 02/10/11			
DEC	INCHES			CHK			
X	±.1			APPR			
XX	±.03			SCALE	3:8		
XXX	±.005			REF	028894		
XXXX	±.0005			FMF	120589.00		
NO	REVISION	BY & DATE	CHK ANG ±1/2"	FINISH		PAGE	OF
	THIRD ANGLE PROJECTION		RFP	PREV		SIZE	DRAWING NO
			NETWORK FILE NAME	607-0012		B	607-0012



ELECTRIC MOTORS
GEARMOTORS
AND DRIVES

TITLE OUTLINE - 140T FRAME
TEFC - RIGID
MATL WASHGUARD