


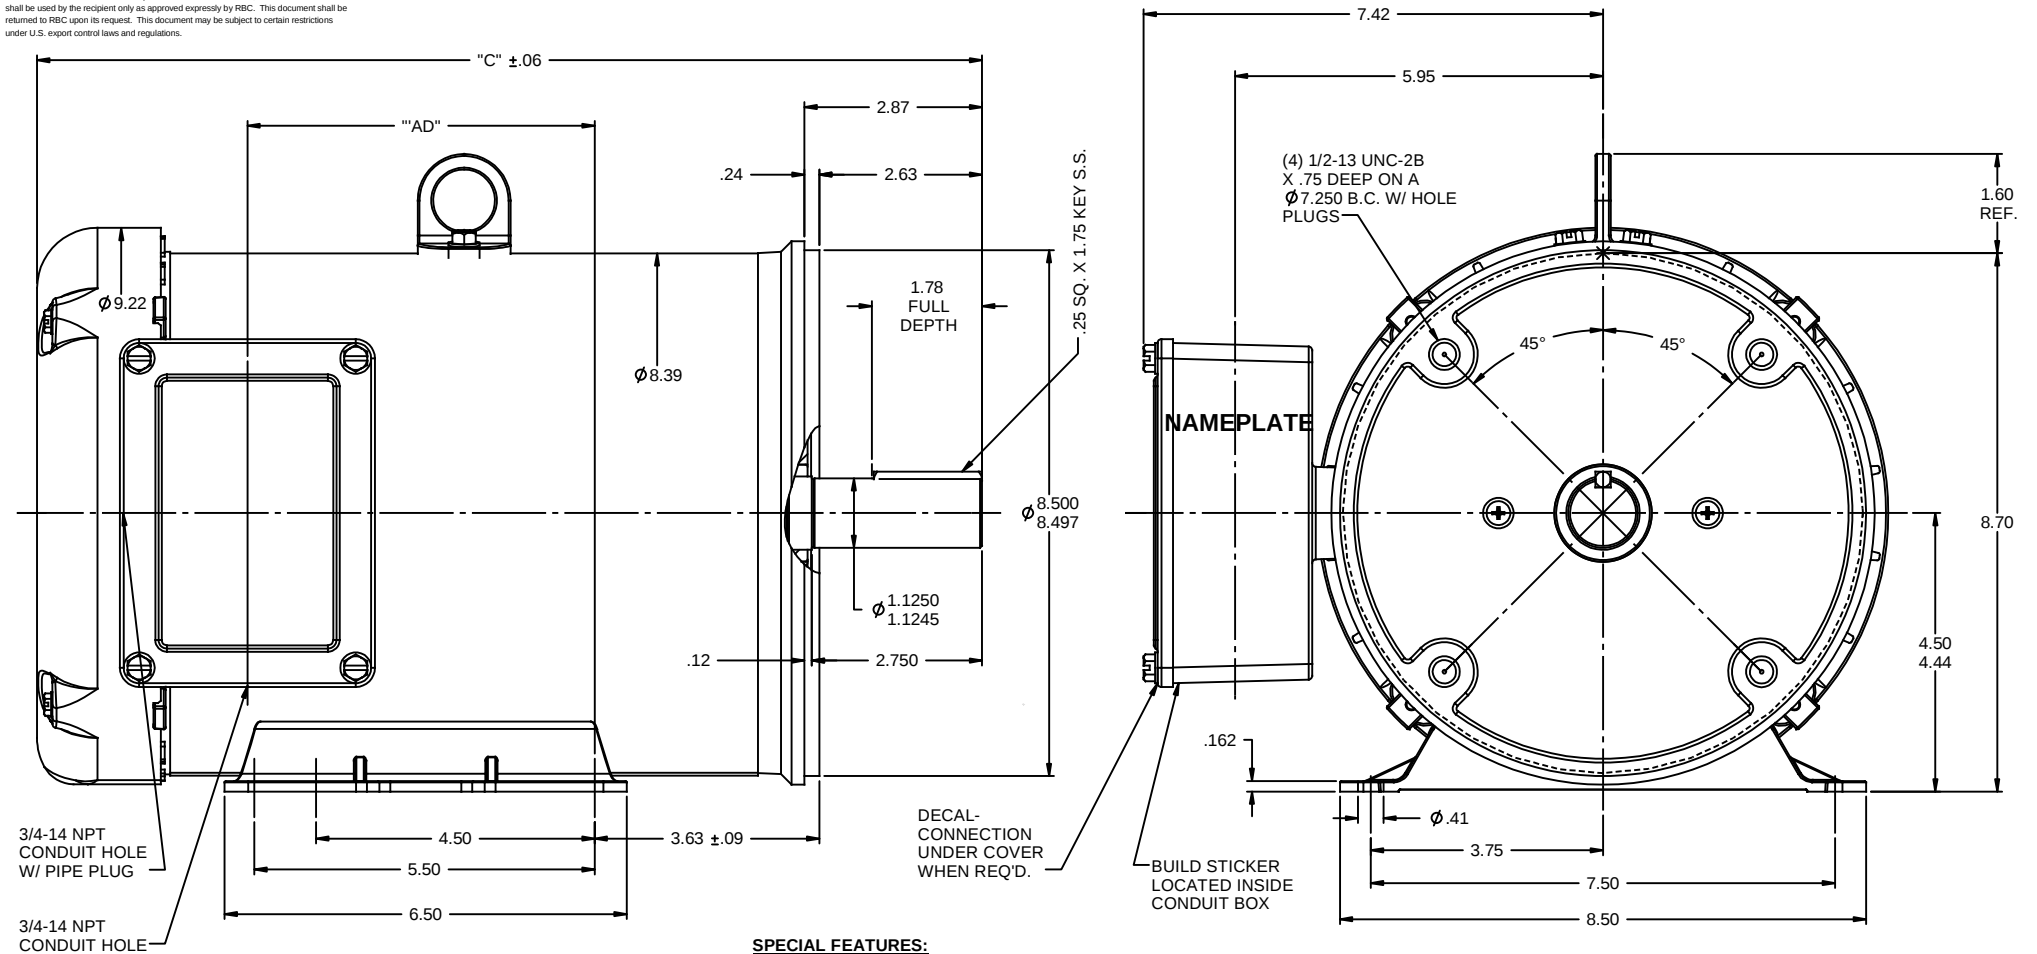

SPECIAL FEATURES:
DOUBLE LIP OIL SEAL BOTH ENDS
GASKETS THROUGHOUT
O-RING SEALED ENDBELLS & THRU BOLTS
LOCKED BEARING W/ SEALED LOCK SCREWS

MAXIMUM FACE RUNOUT TO BE .004 T.I.R.
MAXIMUM PILOT ECCENTRICITY TO BE .004 T.I.R.
PERMISSIBLE SHAFT RUNOUT TO BE .002 T.I.R.

DASH NO.	"C"	"AD"
850	14.27	4.61
900	14.77	5.11
950	15.27	5.61
1000	15.77	6.11

				TOLERANCES UNLESS SPECIFIED		DRAWN JJK 4/4/02
				DEC INCHES		
				X ±.1		CHK
02	ADDED DASH NO. 1000 (132208.00)	PG 9/21/2010	XX ±.03	TITLE OUTLINE - 180TC FRAME		
01	ADDED NOTE FOR BUILD STICKER LOC. PER ISAAC 10-1677	PG 5/4/2010	XXX ±.005	TEFC - RIGID "C"		
-	UPDATED & REDRAWN TO SOLIDWORKS	LST 12/11/2009	XXXX ±.0005	MATL STAINLESS STEEL DUCK		
NO	REVISION	BY & DATE	CHK ANG ±1/2"	FINISH	PAGE	OF
			RFP	PREV	SIZE	DRAWING NO
	THIRD ANGLE PROJECTION				B	035437
			NETWORK FILE NAME	035437		REV 02