



THIRD ANGLE PROJECTION



REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
2	ADDED LEADS T199-24,700.	06/08/99	M.D.PAPE
3	ADDED PART # 2	01/17/03	D.SANKAR
4	CHG TO RBC FORMAT PER IS05-1777	04/19/06	SUDHA

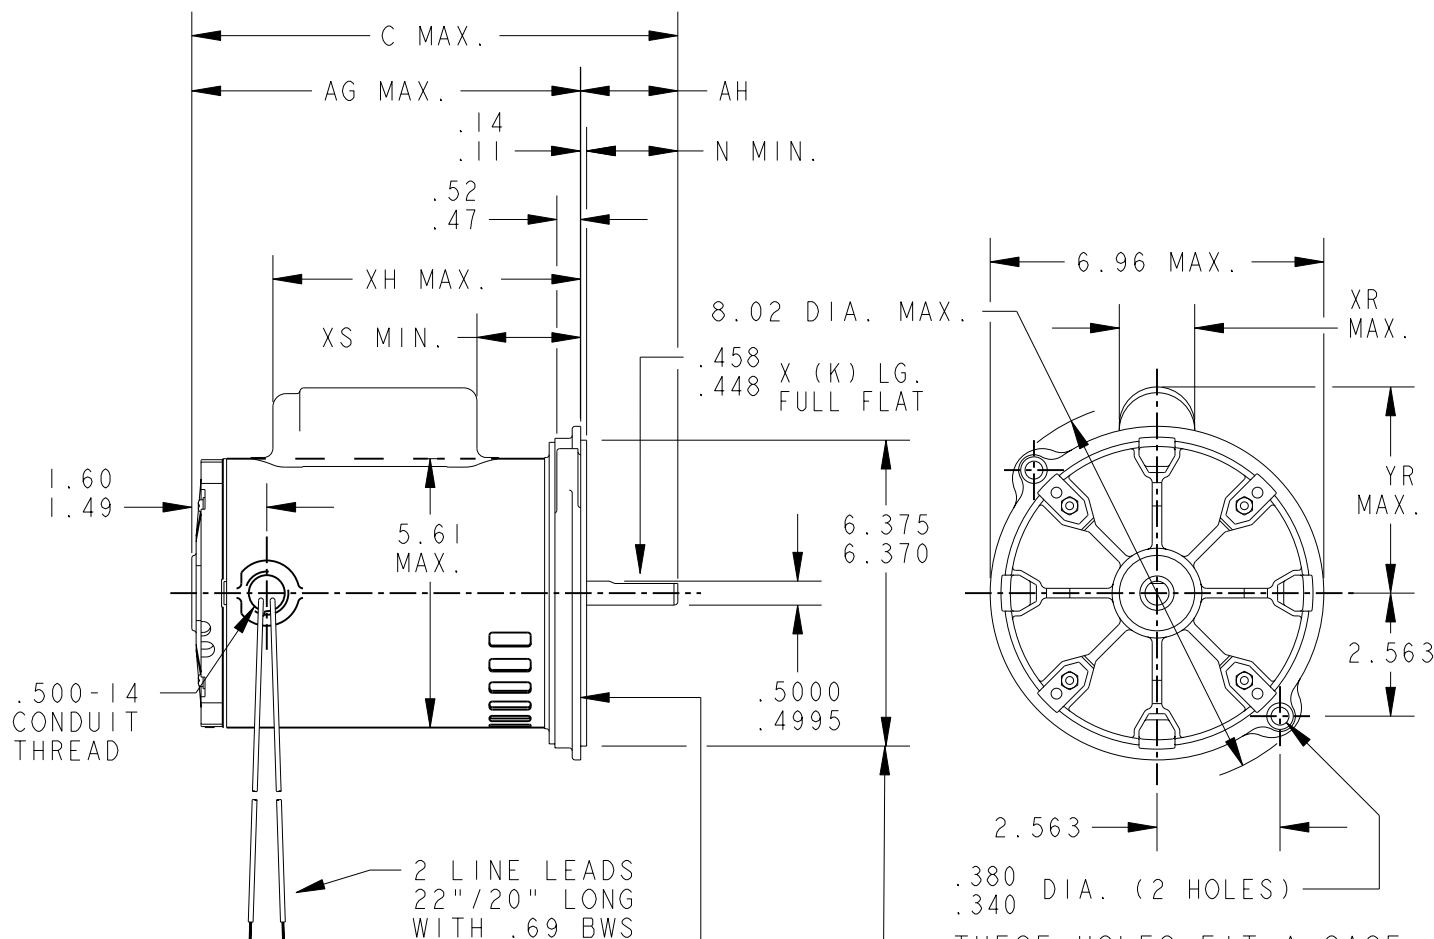

FACE RUNOUT (WITH INDICATOR
MOUNTED STATIONARY RELATIVE
TO SHAFT) MUST NOT EXCEED
.006 T.I.R.

ECCENTRICITY OF THIS SURFACE (WITH — INDICATOR MOUNTED STATIONARY RELATIVE TO SHAFT) MUST NOT EXCEED .006 T.I.R.

THESE HOLES FIT A GAGE
HAVING A RABBIT 6.3755
DIA. AND 2 PINS .3307
DIA. LOCATED ON THE
BASIC HOLE POSITIONS.

2	KC	38	48N	8.73	10.73	6.50	1.60	1.45	4.34	1.31	1.84	2.01/1.97
1	KC	37	48N	8.13	10.13	6.50	1.60	2.06	4.34	1.31	1.84	2.01/1.97
P	TYPE	GE SIZE	NEMA FR	AG	C	XH	XR	XS	YR	K	N	AH

	SIGNATURES		DATE		 REGAL-BELOIT CORPORATION		
	MODEL	M. D. PAPE	10/29/98				
	DETAIL	.	.				
	CHECKED	.	.				
	ENGRG	.	.				
	MFG	.	.				
FOR ADDITIONAL INFO REFER TO:			TITLE OUTLINE FORM N - SPECIAL PURPOSE MOTOR - TWO LUG FLANGE MOUNTED - BALL BEARING				
APPLIED PRACTICES	QUALITY	.				.	
DIMENSIONS ARE IN INCHES	ISSUED	M. D. PAPE				10/29/98	
MATERIAL		SOLID MODEL: 52A110216					
			SIZE	DRAWING	REV		
			A		52A110216		
			SCALE: 0.250	REF. No: .	SHEET 1 of 1		