



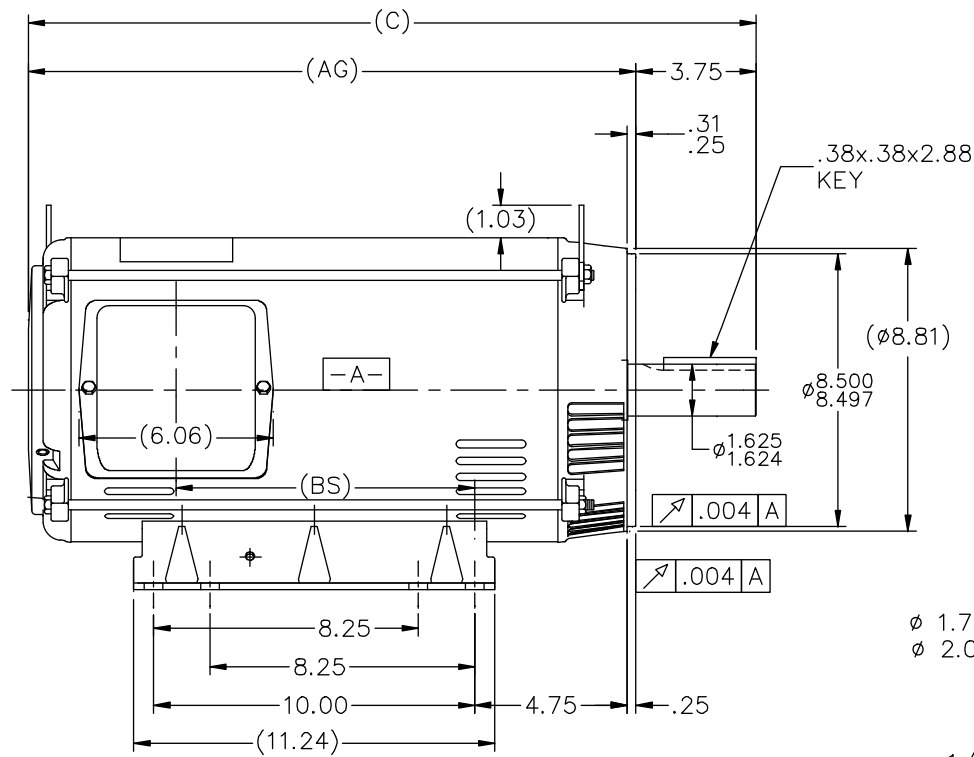


ϕ 1.75 LEAD HOLE
 ϕ 2.00 KNOCKOUT

1/2-13UNC-2B
 .88 FULL THD.
 4 HOLES

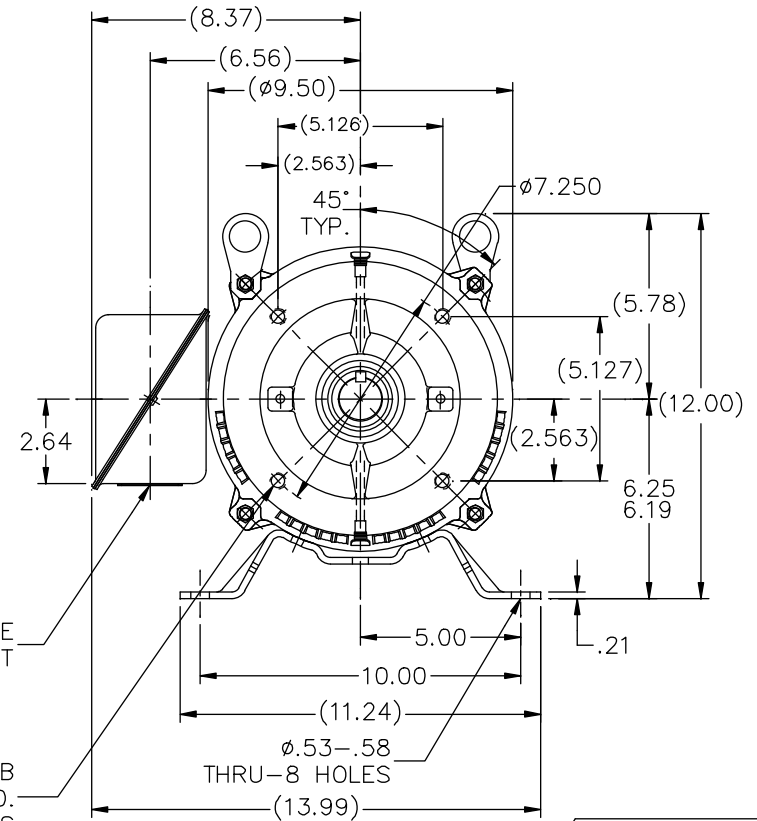

F2 VIEW



NOTES:

1. NAMEPLATE TO BE READ FROM C'BOX SIDE OF MOTOR.
2. BOX CAN BE MOUNTED IN 90° STEPS.
3. BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.
(EXCEPT AS NOTED.)

DASH	FR.	C	BS	AG	MOUNTING
1340	254T	20.89	7.68	17.14	F1 OR F2
1515	254/256T	22.64	9.43	18.89	F1 OR F2

NO.	REVISION	BY & DATE
03	ADDED F2 VIEW	JD 02-05-2013
02	UPDATED CONDUIT BOX CN28427	TJB 02-07-2000
01	NEW DRAWING	BLR 10-20-1999

TOLERANCES UNLESS SPECIFIED
DEC. INCHES
.X $\pm .1$
.XX $\pm .03$
.XXX $\pm .005$
.XXXX $\pm .0005$
ANG $\pm 7'30''$



TITLE OUTLINE
 250T FR. -DR.PR. -C'FACE

MAT'L.

FINISH

DRAWN BLR 10-20-1999
 CHK DRS 10-20-1999
 APPD MAL 10-20-1999
 SCALE 1=5.5
 REF
 FMF
 PREV

THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT
 IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED
 THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT

RFP 10-20-1999
 DIST LB

CAD FILE SS86506LN

SIZE
 A

DRAWING NO. PAGE OF
 SS86506LN 03