

TECHNICAL INFORMATION

1. BEARING LUBRICATION DE: MOBIL POLYREX EM
ODE: MOBIL POLYREX EM
2. BEARING TYPE DE: 6326C3
ODE: 6326C3 INSULATED
3. WINDING TEMP. DETECTORS
NUMBER AND TYPE: 6xRTD(Pt0°C-100ohm)
LOCATION: IN STATOR SLOT
4. BEARING TEMP. DETECTORS
NUMBER AND TYPE: _____
5. SPACE HEATER 1 PHASE
VOLTS: 120 WATTS: 400
6. ROTATION: CCW VIEWED FROM NON DRIVE END
THIS MOTOR IS BI DIRECTIONAL
7. MOTOR PAINT COLOR: _____
8. APPROX. WEIGHT: 7300 Lbs
9. ACCESORIES: _____

DRAWING LIST

| | | | | |
|--|-----|-------------|----------|---------|
| MAIN TERMINAL BOX 130-7532-02 | 3 | UPDATE | RWS | 1/2/14 |
| AUX TERMINAL BOX FOR SPACE HEATER 130-7520-50 R.T.D. 130-7522-51 THERMISTOR N/A | 2 | UPDATE | MH | 8/15/05 |
| | 1 | UPDATE | RW | 4/16/03 |
| | 0 | FIRST ISSUE | RW | 3/25/03 |
| PRODUCTION # | N/A | NO. | REVISION | BY DATE |

**MOTOR OUTLINE FOR
THREE PHASE INDUCTION MOTOR**

| | | | | | | |
|--|---------------------------|-------------------|----------------------|---|------------------------------|-------------------|
| CUSTOMER NAME | | | | P.O. NO. | MOTOR TAG NO. | |
| OUTPUT HP | POLE 8 | VOLTAGE V | FREQUENCY Hz | FULL LOAD SPEED (min ⁻¹) | TOSHIBA MODEL NO. | |
| TYPE | FORM | INS. CLASS F | RATING CONT. | FRAME 5811/12 | S.F. | ENCLOSURE WP-I |
| TOSHIBA INTERNATIONAL CORPORATION HOUSTON, TEXAS U.S.A. | | | | | | |
| 3rd ANGLE PROJ. | PREPARED BY: R.WILKINS | DATE: 03/25/03 | CHECKED BY: M. HO | DATE: 04/01/03 | DRAWING NO.: MDSL 0086-04 | REV. 3 |

TYPICAL MOTOR PERFORMANCE DATA

Model: 7008WPAL11E-C

| HP | kW | Pole | FL RPM | Frame | Voltage | Hz | Phase | FL Amps |
|-----------|-----|------------|--------|--------|----------------|-------------|----------|--------------|
| 700 | 522 | 8 | 885 | 5812US | 4000 | 60 | 3 | 109 |
| Enclosure | IP | Ins. Class | S.F. | Duty | NEMA Nom. Eff. | NEMA Design | kVA Code | Ambient (°C) |
| WP-I | 24 | F | 1.15 | CONT | 94.3 | - | G | 40 C |

| Load | HP | kW | Amperes | Efficiency (%) | Power Factor (%) |
|--------------|--------|-------|---------|----------------|------------------|
| Full Load | 700 | 522.0 | 108.3 | 94.3 | 73.8 |
| ¾ Load | 525.00 | 391.5 | 88.2 | 94.2 | 68.0 |
| ½ Load | 350.00 | 261.0 | 71.2 | 93.4 | 56.7 |
| ¼ Load | 175.00 | 130.5 | 59.3 | 90.0 | 35.3 |
| No Load | | | 52.3 | | 2.3 |
| Locked Rotor | | | 618.73 | | 24.6 |

| Torque | | | | Rotor wk ² Inertia (lb-ft ²) |
|----------------------|-------------------------|--------------------|-----------------------|---|
| Full Load (lb-ft) | Locked Rotor (% FLT) | Pull Up (% FLT) | Break Down (% FLT) | |
| 4154 | 155 | 95 | 245 | 518.44 |

| Safe Stall Time(s) | | Sound Pressure dB(A) @ 1M | Bearings* | | Approx. Motor Weight (lbs) |
|--------------------|-----|------------------------------|-----------|------------|-------------------------------|
| Cold | Hot | | DE | NDE | |
| 11.1 | 5.4 | - | 6326C3 | 6326C3 INS | |

*Bearings are the only recommended spare part(s).

Motor Options:
Product Family:ODP & WP-I
Mounting:Footed,Shaft:US Shaft

| | |
|-------------|--|
| Customer | |
| Customer PO | |
| Sales Order | |
| Project # | |

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

| | | | | | |
|-------------|-----------|------------------|-------------|-------------|---------------|
| Engineering | bmammen | Doc. Written By | D. Suarez | Doc.# / Rev | MPCF-1119 / 0 |
| Engr. Date | 8/18/2014 | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011 |


| | | | |
|-------------|-----------|------------|--|
| Issued Date | 4/23/2015 | Transmit # | |
| Issued By | dschoeck | Issued Rev | |

SPEED TORQUE/CURRENT CURVE

Model: 7008WPAL11E-C

| | | | | | | | | |
|-------------------|---|-------------------|------------------|-------------|----------------|-------------|----------|----------------|
| HP | kW | Pole | FL RPM | Frame | Voltage | Hz | Phase | FL Amps |
| 700 | 522 | 8 | 885 | 5812US | 4000 | 60 | 3 | 109 |
| Enclosure | IP | Ins. Class | S.F. | Duty | NEMA Nom. Eff. | NEMA Design | kVA Code | Ambient (°C) |
| WP-I | 24 | F | 1.15 | CONT | 94.3 | - | G | 40 C |
| Locked Rotor Amps | Rotor wk ² Inertia (lb-ft ²) | Torque | | | | | | Break Down (%) |
| | | Full Load (lb-ft) | Locked Rotor (%) | Pull Up (%) | | | | |
| 618.73 | 518.44 | 4154 | 155 | 95 | | | 245 | |

Design Values

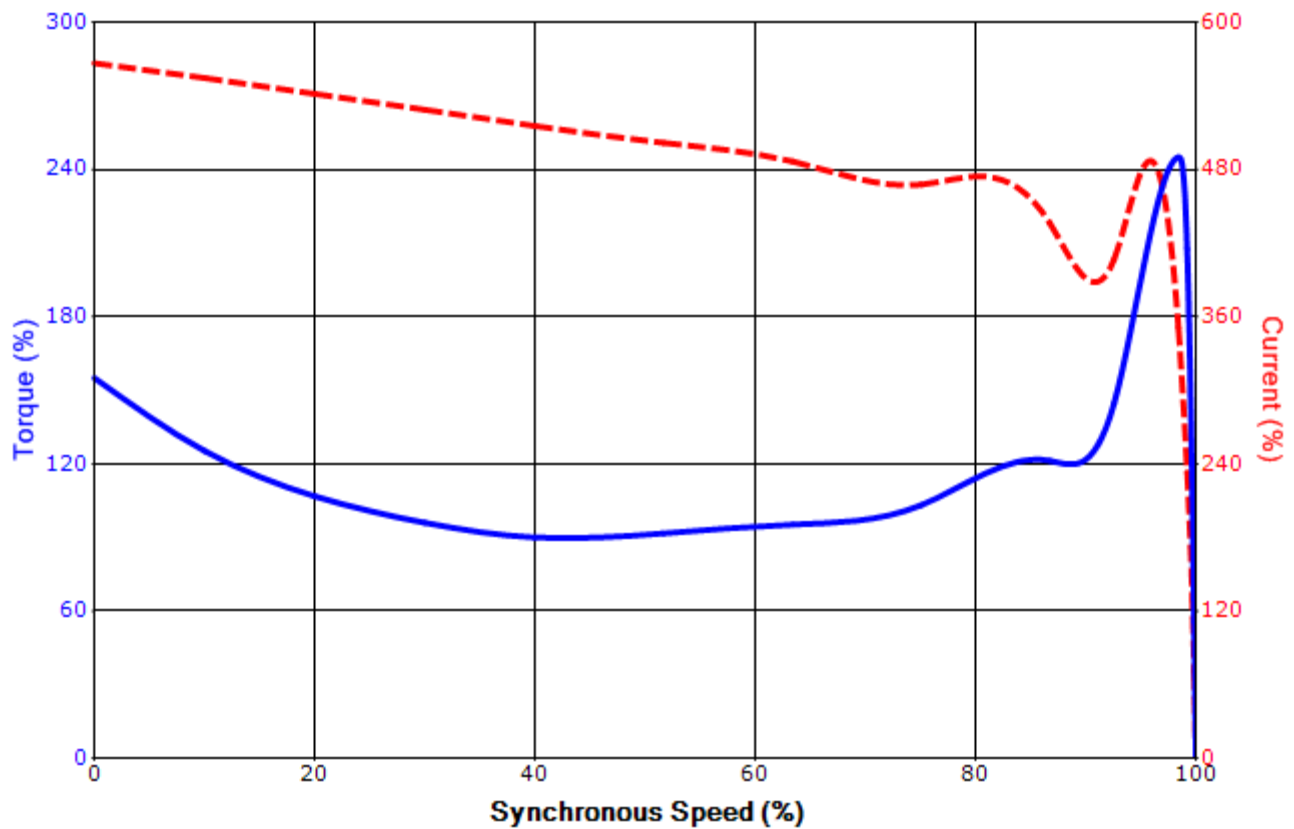

| | | | |
|-------------|--|--|-----|
| Customer | | wk ² Load Inertia (lb-ft ²) | - |
| Customer PO | | Load Type | - |
| Sales Order | | Voltage (%) | 100 |
| Project # | | Accel. Time | - |

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

| | | | | | |
|-------------|-----------|------------------|-------------|-------------|---------------|
| Engineering | bmammen | Doc. Written By | D. Suarez | Doc.# / Rev | MPCF-1121 / 0 |
| Engr. Date | 8/18/2014 | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011 |