


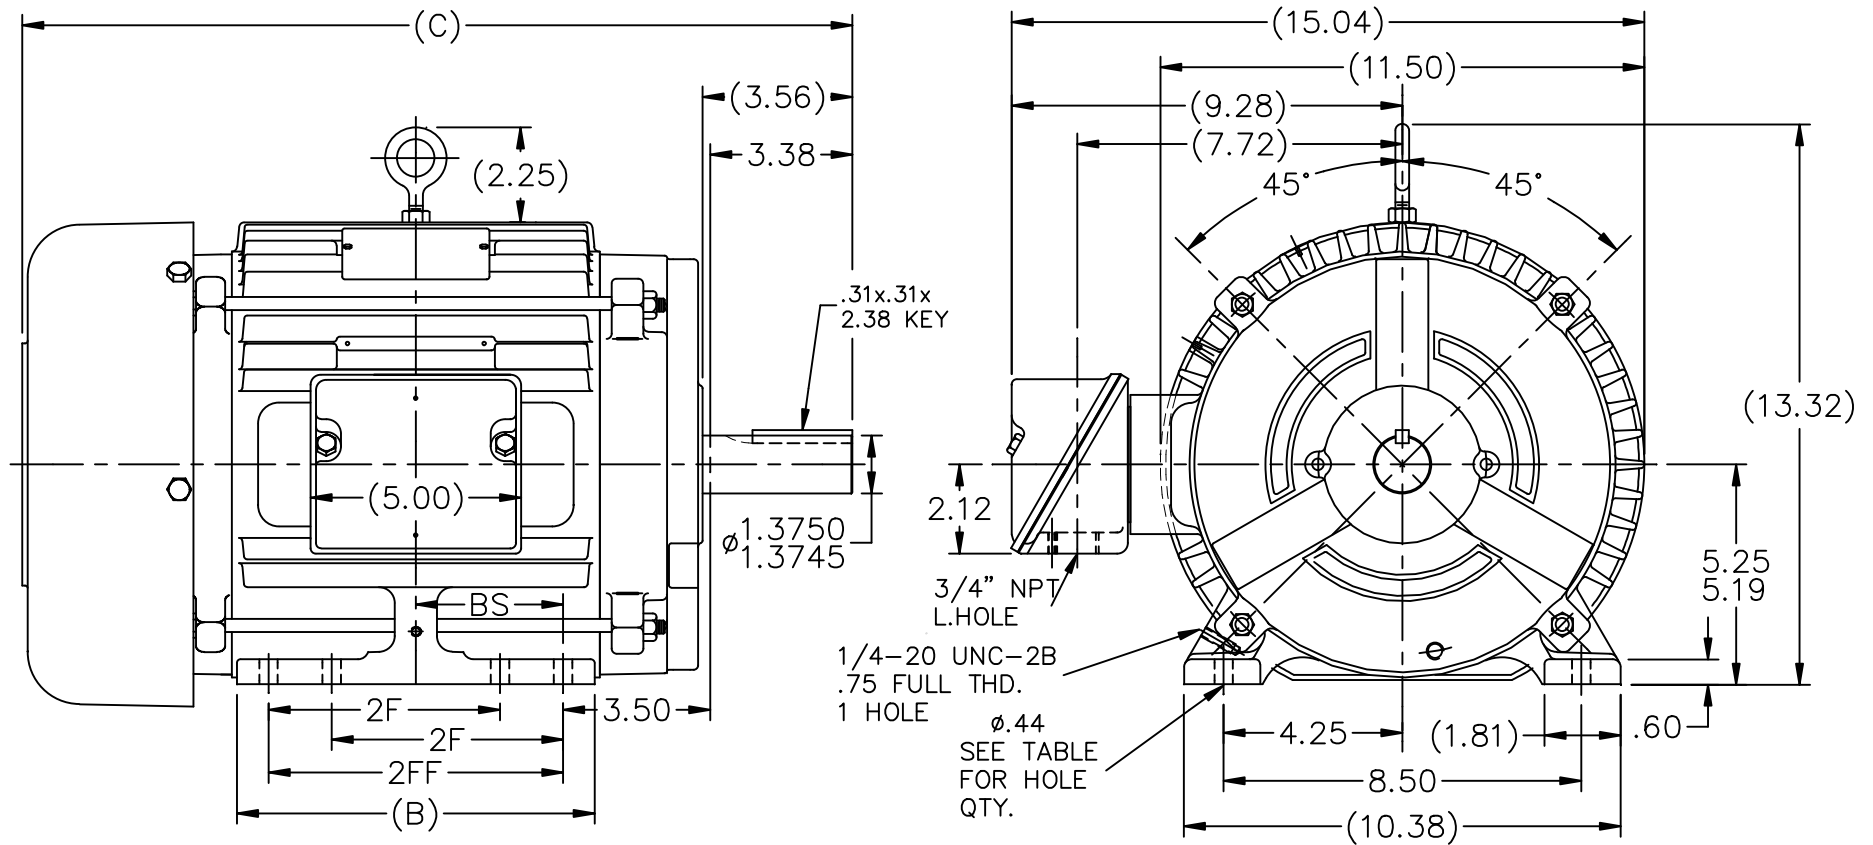

NOTES:

1. BOX CAN BE ROTATED IN 90° STEPS.
2. BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.
3. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

DASH	FR.	C	B	BS	2F	2FF	FOOT HOLE QTY.	MOUNTING
725	213T	18.22	7.00	2.75	—	5.50	4	F1 OR F2
875	215T	19.72	8.50	3.50	—	7.00	4	F1 OR F2
875	213/5T	19.72	8.50	3.50	5.50	7.00	8	F1 OR F2
10-08-1999 000	215T	20.97	9.75	4.12	7.00	8.25	8	F1 OR F2

							ELECTRIC MOTORS GEARMOTORS AND DRIVES			DRAWN ST 08-21-2007					
										CHK	SVL 08-21-2007				
					.X					±.1	APPD				
					.XX					±.03	SCALE 7=32				
					.XXX					±.005	REF				
					.XXXX					±.0005	FMF				
											MAT'L.				
NO.	REVISION			BY & DATE		CHK	ANG	±7'30"	FINISH			PREV			
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT – DO NOT SCALE THIS PRINT						RFP			CAD FILE SS87301LE			SIZE A	DRAWING NO. PAGE OF		REV.
						DIST LB							SS87301LE		