


Uncontrolled Copy

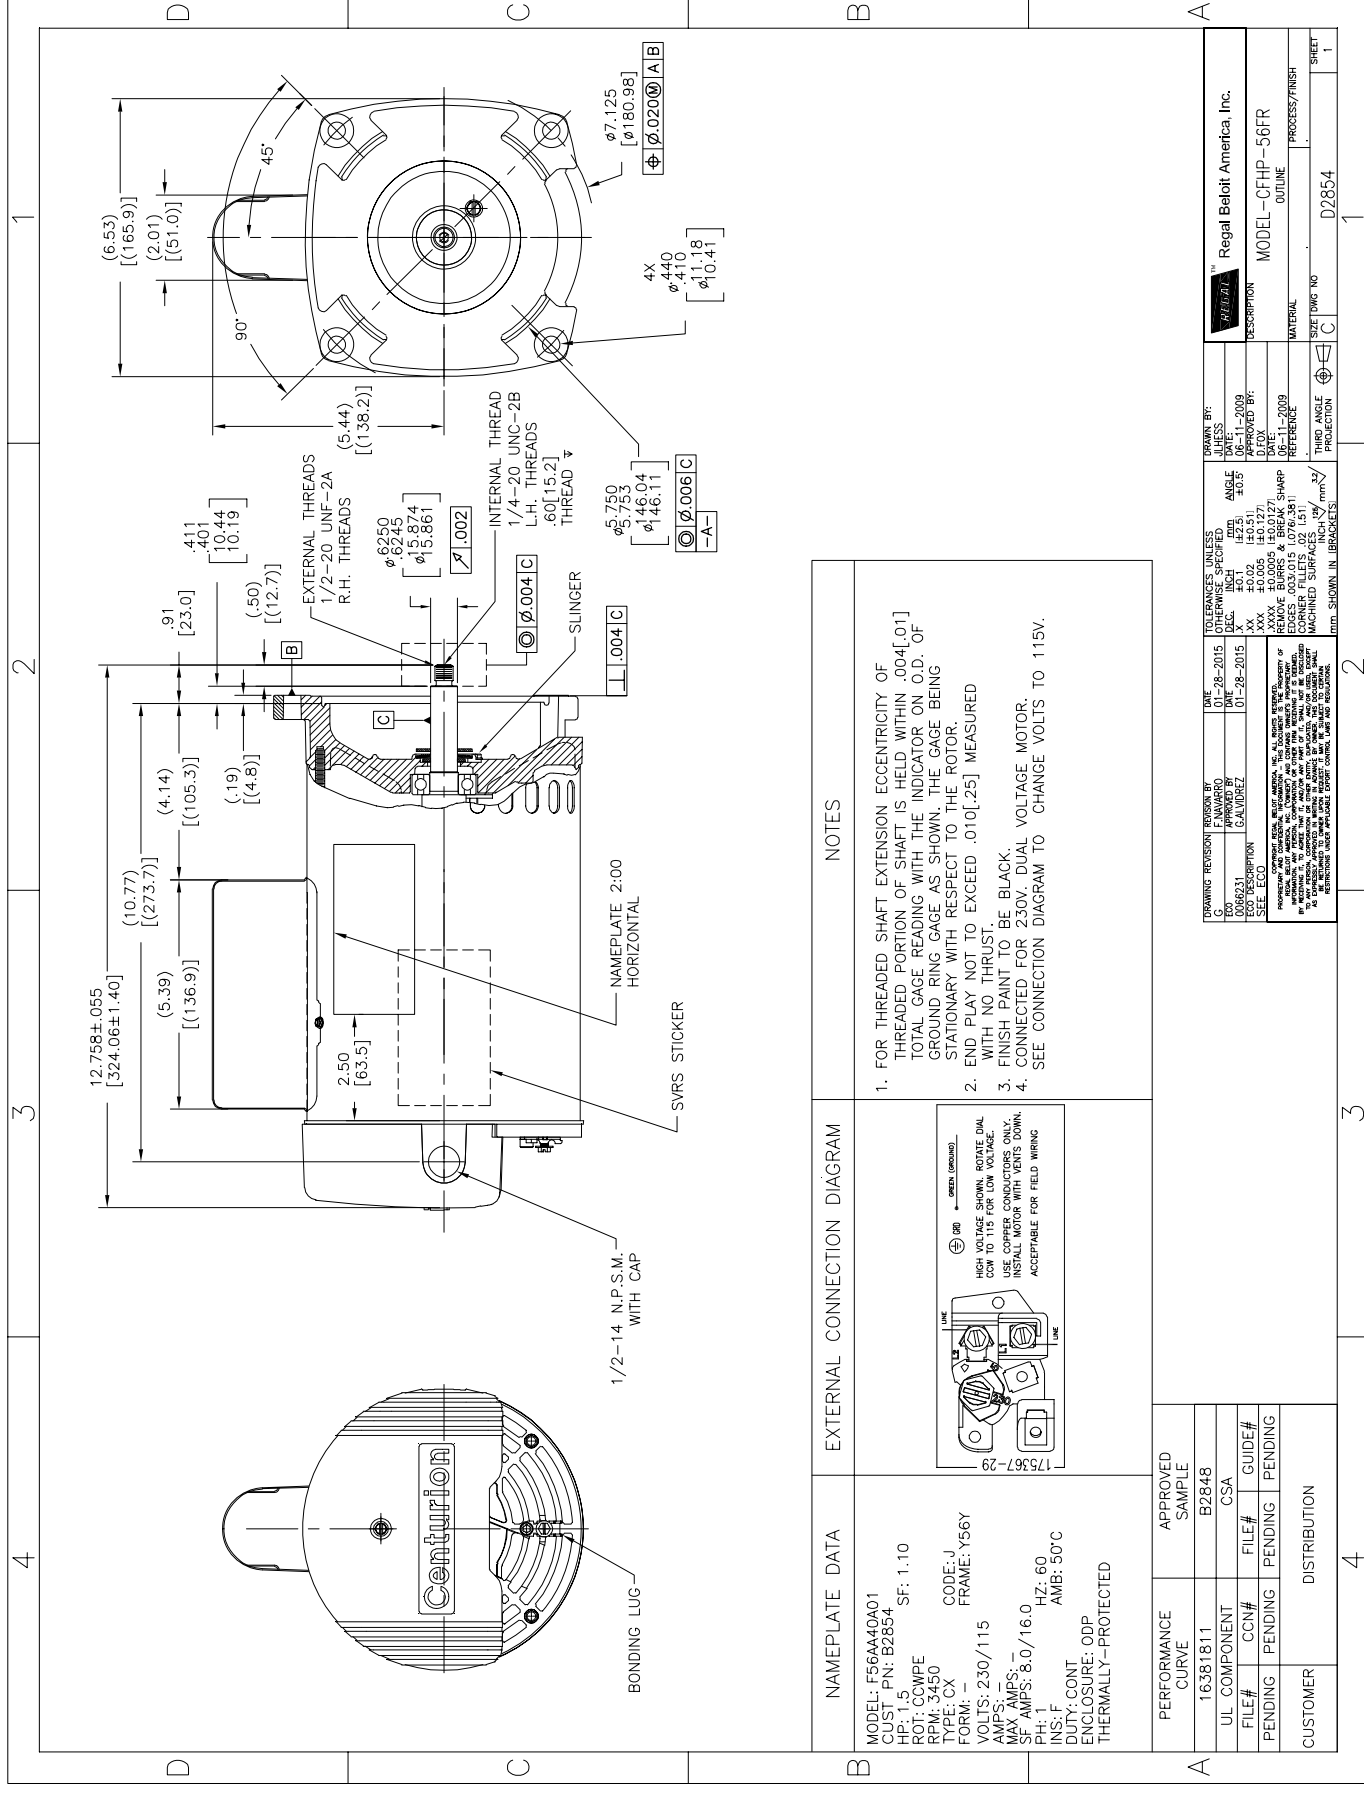

NAMEPLATE DATA		EXTERNAL CONNECTION DIAGRAM		NOTES	
MODEL: F56A4001	CUST. PN: B2854			<p>1. FOR THREADED SHAFT EXTENSION ECCENTRICITY OF THREADED PORTION OF SHAFT IS HELD WITHIN .004[.01] TOTAL GAGE READING WITH THE INDICATOR ON O.D. OF GROUND RING GAGE AS SHOWN, THE GAGE BEING STATIONARY WITH RESPECT TO THE ROTOR.</p> <p>2. END PLAY NOT TO EXCEED .010[.25] MEASURED WITH NO THRUST</p> <p>3. FINISH PAINT TO BE BLACK.</p> <p>4. SEE CONNECTION DIAGRAM TO CHANGE VOLTS TO 115V.</p>	
HP: 1.5	SF: 1.10				
ROT: COMPE	CODE: J				
RPM: 3450	FRAME: Y56Y				
TYPE: CX					
VOLTS: 230/115					
MAX. AMPS: -					
SF. AMPS: 8.0/16.0	Hz: 60				
INS: F	DUTY: CONT				
ENCLOSURE: ODP					
THERMALLY-PROTECTED					

PERFORMANCE CURVE	APPROVED SAMPLE
16381811	B2848
UL COMPONENT	CSA
FILE#	FILE#
PENDING	PENDING
PENDING	PENDING
CUSTOMER	DISTRIBUTION

FORMING REVISION		DATE		BY		APPROVED BY		DATE		BY	
01-28-2015	01-28-2015	01-28-2015	01-28-2015	01-28-2015	01-28-2015	01-28-2015	01-28-2015	01-28-2015	01-28-2015	01-28-2015	01-28-2015
01-28-2015	01-28-2015	01-28-2015	01-28-2015	01-28-2015	01-28-2015	01-28-2015	01-28-2015	01-28-2015	01-28-2015	01-28-2015	01-28-2015

REGAL BELLOTT AMERICA, INC.	DESCRIPTION	MATERIAL	PROCESS/FINISH
Regal Beloit America, Inc.	MODEL-CFHP-56FR	OUTLINE	PROCESS/FINISH

SIZE	TWC NO	PROJECTION	SHEET
C	D2854	C	1