


Uncontrolled Copy

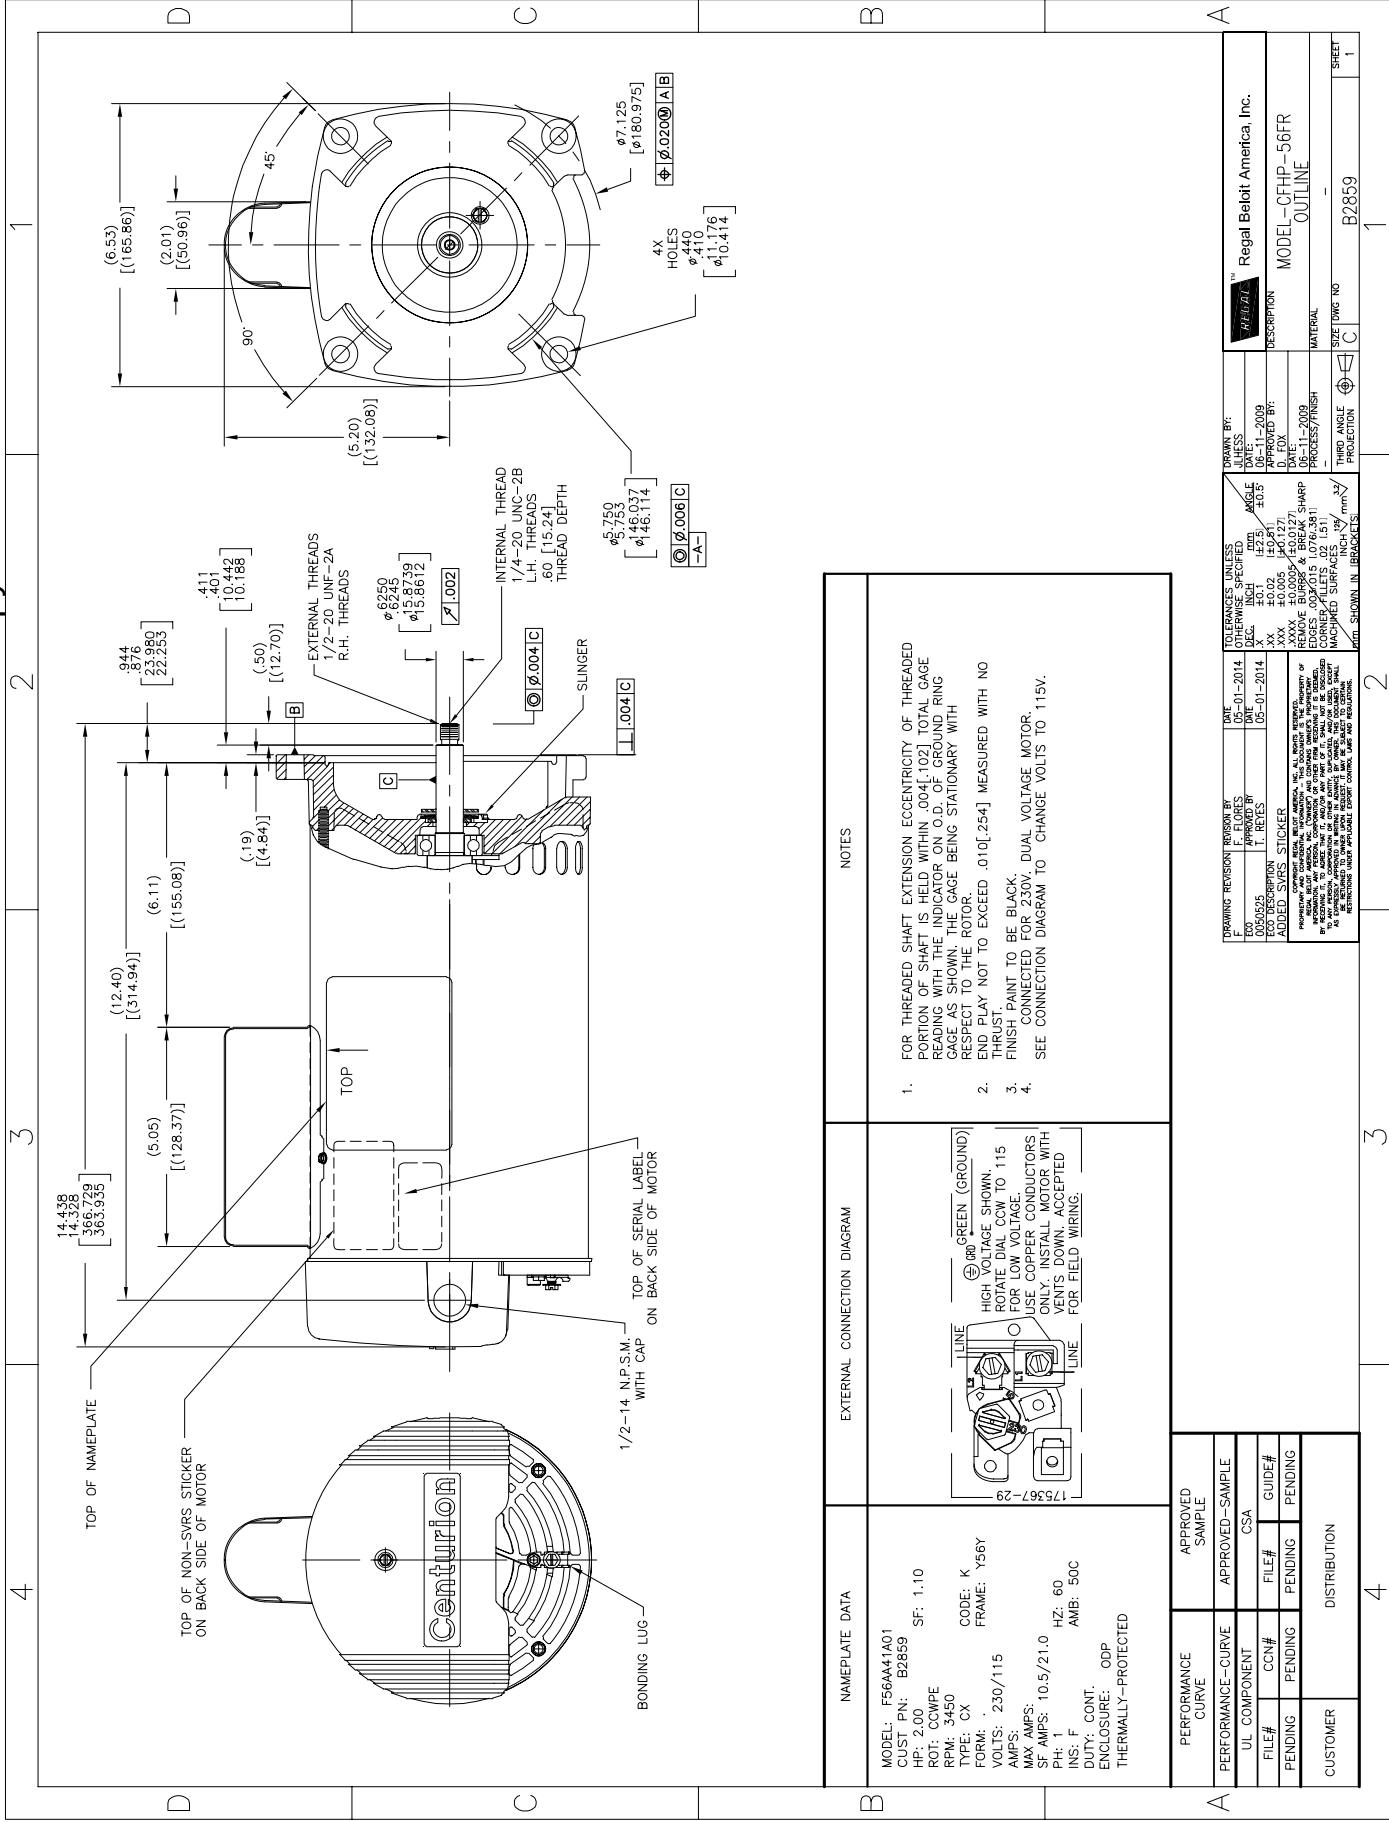

	PERFORMANCE CURVE	APPROVED SAMPLE
	PERFORMANCE-CURVE	APPROVED-SAMPLE
	UL COMPONENT	CSA
	FILE#	FILE#
	CCN#	GUIDE#
	PENDING	PENDING
CUSTOMER	DISTRIBUTION	

[illegible]

NAMEPLATE DATA	EXTERNAL CONNECTION DIAGRAM	NOTES
MODEL: F56M41401 RS-PN: B2859 HP: 2.00 ROT: COMPE RPM: 3450 TYPE: CX CODE: K FRAME: Y56Y VOLTS: 230/115 AMPS: MAX AMPS: SF AMPS: 10.5/21.0 PH: 1 INS: F DUTY: CONT. ENCLOSURE: ODP TEMPERATURE-PROTECTED		- FOR THREADED SHAFT EXTENSION ECCENTRICITY OF THREADED PORTION OF SHAFT IS HELD WITHIN .004[.102] TOTAL GAGE READING WITH INDICATOR IN O.D. OF GROUND RING SHOWING THE GAGE BEING STATIDARY WITH RESPECT TO THE ROTOR. - END PLAY NOT TO EXCEED .010[.254] MEASURED WITH NO THRUST. - FINISH PAINT TO BE BLACK. - CONNECTED FOR 230V. DUAL VOLTAGE MOTOR. SEE CONNECTION DIAGRAM TO CHANGE VOLTS TO 115V.

[illegible]

NAMEPLATE DATA	EXTERNAL CONNECTION DIAGRAM	NOTES
MODEL: F56M41401 RS-PN: B2859 HP: 2.00 ROT: COMPE RPM: 3450 TYPE: CX CODE: K FRAME: Y56Y VOLTS: 230/115 AMPS: MAX AMPS: SF AMPS: 10.5/21.0 PH: 1 INS: F DUTY: CONT. ENCLOSURE: ODP TEMPERATURE-PROTECTED	GREEN (GROUND) HIGH VOLTAGE SHOWN. ROTATE DIAL C.W. TO 115 FOR LOW VOLTAGE. USE COPPER CONDUCTORS ONLY. INSTALL MOTOR WITH VENTS DOWN. ACCEPTED FOR FIELD WIRING. 175.567-29	- FOR THREADED SHAFT EXTENSION ECCENTRICITY OF THREADED PORTION OF SHAFT IS HELD WITHIN .004[.102] TOTAL GAGE READING WITH INDICATOR IN O.D. OF GROUND RING. GAGE BEING STATIONARY WITH SHAFT BEING STATIONARY WITH RESPECT TO THE ROTOR. - END PLAY NOT TO EXCEED .010[.254] MEASURED WITH NO THRUST. - FINISH PAINT TO BE BLACK. - CONNECTED FOR 230V. DUAL VOLTAGE MOTOR. SEE CONNECTION DIAGRAM TO CHANGE VOLTS TO 115V.

	PERFORMANCE CURVE	APPROVED SAMPLE
	PERFORMANCE-CURVE	APPROVED-SAMPLE
	UL COMPONENT	CSA
	FILE#	FILE#
	CCN#	GUIDE#
	PENDING	PENDING
CUSTOMER	DISTRIBUTION	

[illegible]