
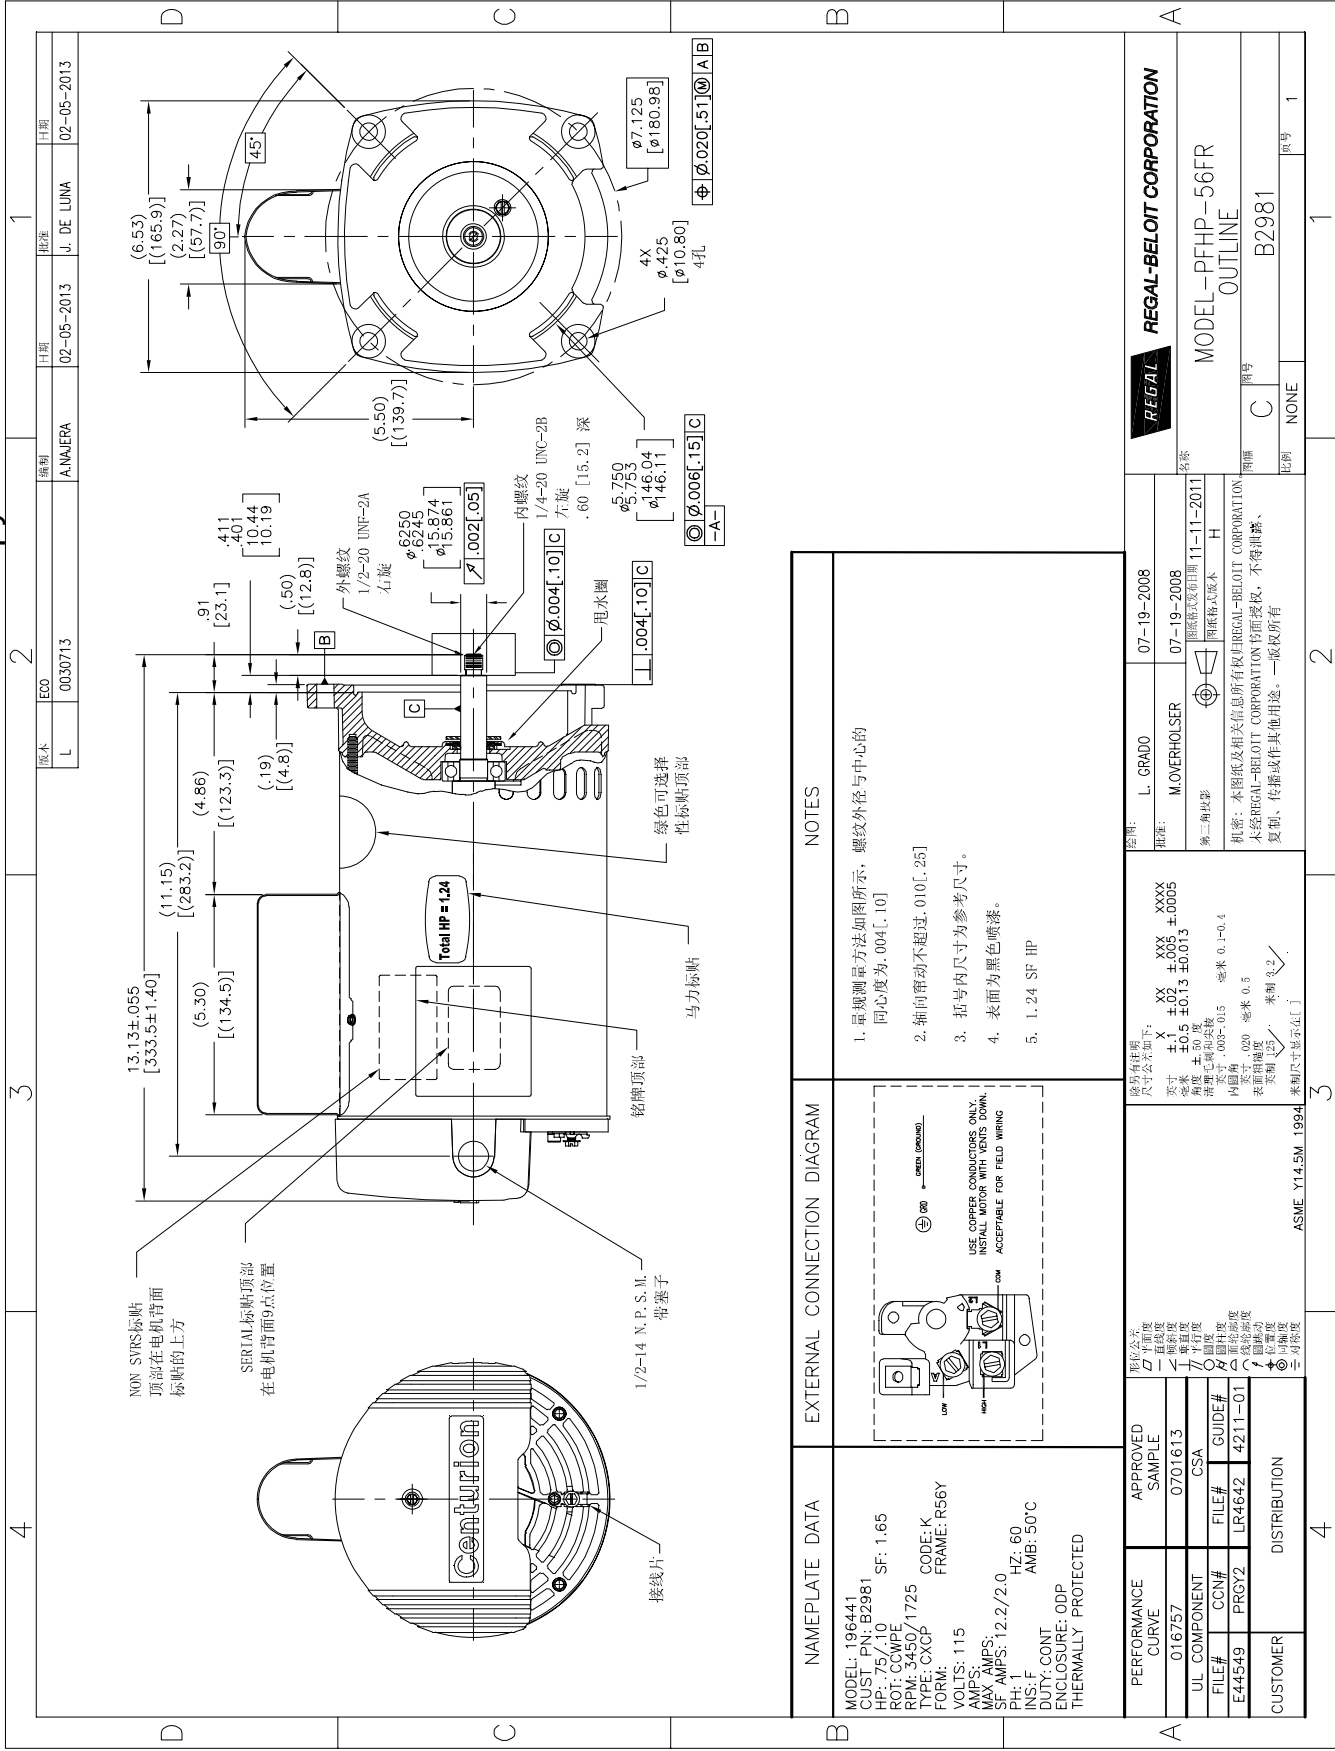


Uncontrolled Copy

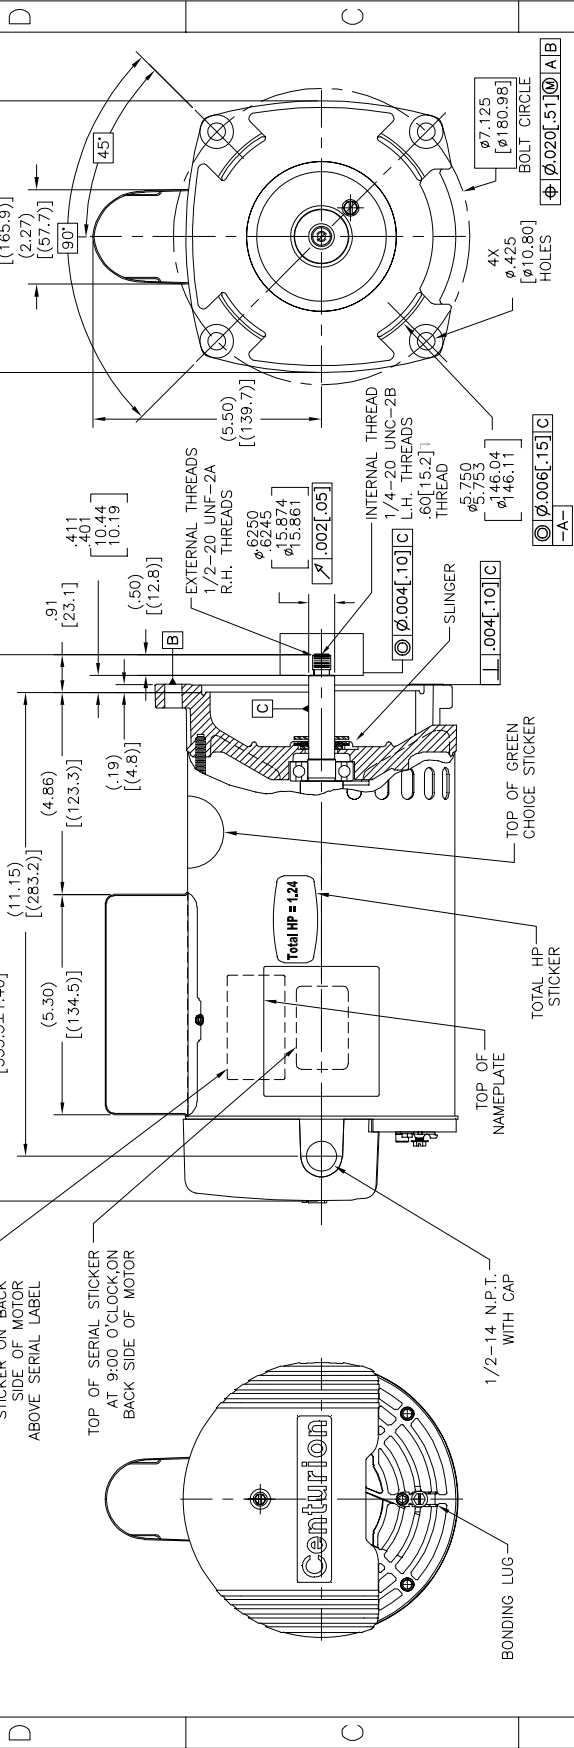

[illegible]

NAMEPLATE DATA	EXTERNAL CONNECTION DIAGRAM	NOTES
MODEL: 196441 CUST. PN: B2981 HP: .75/1.10 SF: 1.65 ROT: COMPE RPM: 3450/1725 TYPE: CXCP CODE: K FRAME: R56Y VOLTS: 115 AMP: 3 MAX. AMP: 3 SF AMP: 1.2, 2/2.0 PH: 1 INS: F DUTY: CONT ENCLOSURE: ODP THERMALLY PROTECTED		1. FOR THREADED SHAFT EXT. ECCENTRICITY OF THREADED PORTION OF SHAFT IS HELD WITHIN .004[.10] TOTAL GAGE READING WITH THE INDICATOR ON O.D. OF GROUND RING GAGE AS SHOWN. THE GAGE BEING STATIONARY WITH RESPECT TO THE ROTOR. 2. END PLAY NOT TO EXCEED .010[.25] MEASURED WITH NO THRUST. 3. ALL DIMENSIONS SHOWN IN PARENTHESIS ARE REFERENCE DIMENSIONS. 4. FINISH PAINT TO BE BLACK. 5. 1.24 SF HP

[illegible]

[illegible]