


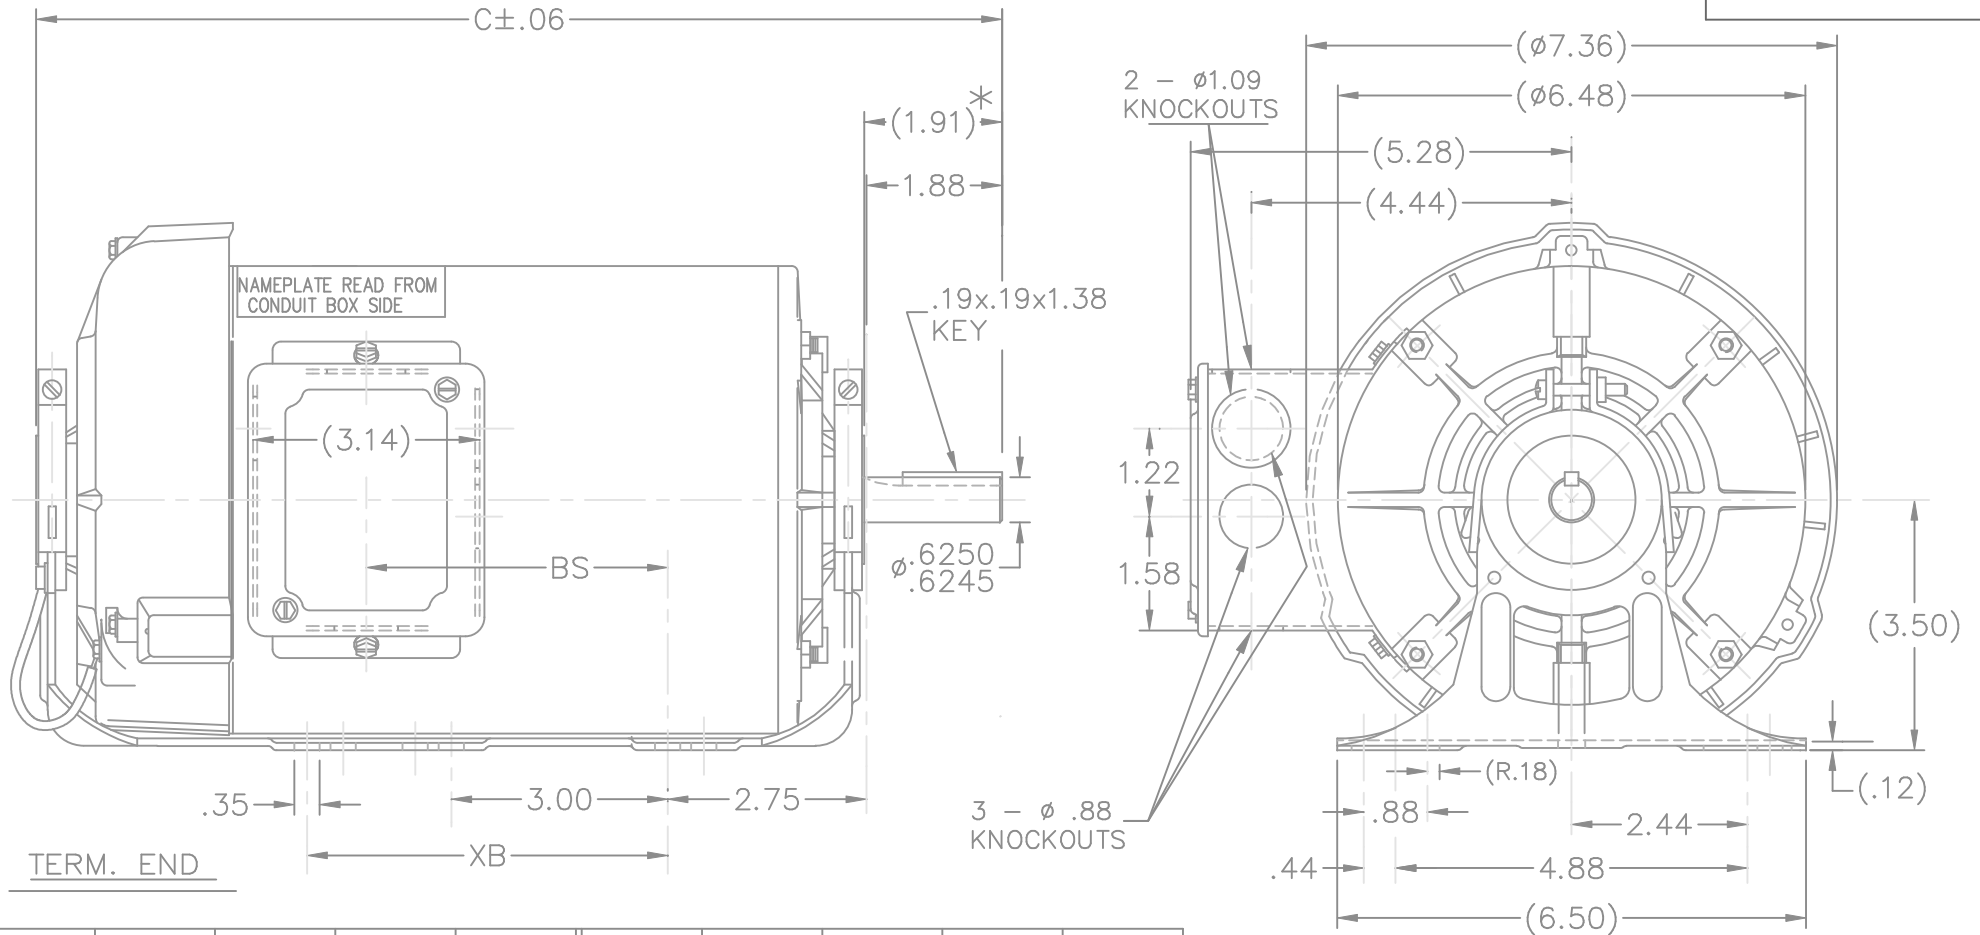

* DIMENSION IS FROM RESILIENT RING END CAP TO END OF SHAFT

NOTES:
1. MOTOR MUST BE ROTATED TO PROVIDE SOCKET CLEARANCE FOR GROUND SCREW, MAXIMUM (10 DEGREES).

DASH	FR.	C	XB	BS	DASH	FR.	C	XB	BS
656	56-65	12.30	0	3.18	856	56-85	14.30	0	5.18
706	56-70	12.80	0	3.68	906	56-90	14.80	0	5.68

				TOLERANCES UNLESS SPECIFIED	
				DEC.	INCHES
4	UPDATED DRAWING			RJW 03-28-2007	.X $\pm .1$
3	REDRAWN IN AUTOCAD			TAT 09-01-2004	ML .XX $\pm .03$
2	ADDED NOTE CN 24378			PGK 06-11-1997	.XXX $\pm .005$
1	NEW DRAWING 3820480			DD 11-09-1992	.XXXX $\pm .0005$
NO.	REVISION			BY & DATE	CHK ANG $\pm 7'30''$

		DRAWN SMC 07-23-1991	
		CHK ML 07-23-1991	
TITLE OUTLINE		APPD RJS 07-29-1991	
56 FR. - TEFC - BB - RESIL. BASE		SCALE 3=8	
MAT'L.		REF	
FINISH		FMF	
		PREV	

THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT

RFP
DIST WP

CAD FILE 100507

SIZE	DRAWING NO.	PAGE	OF	REV.
A	100507			4