
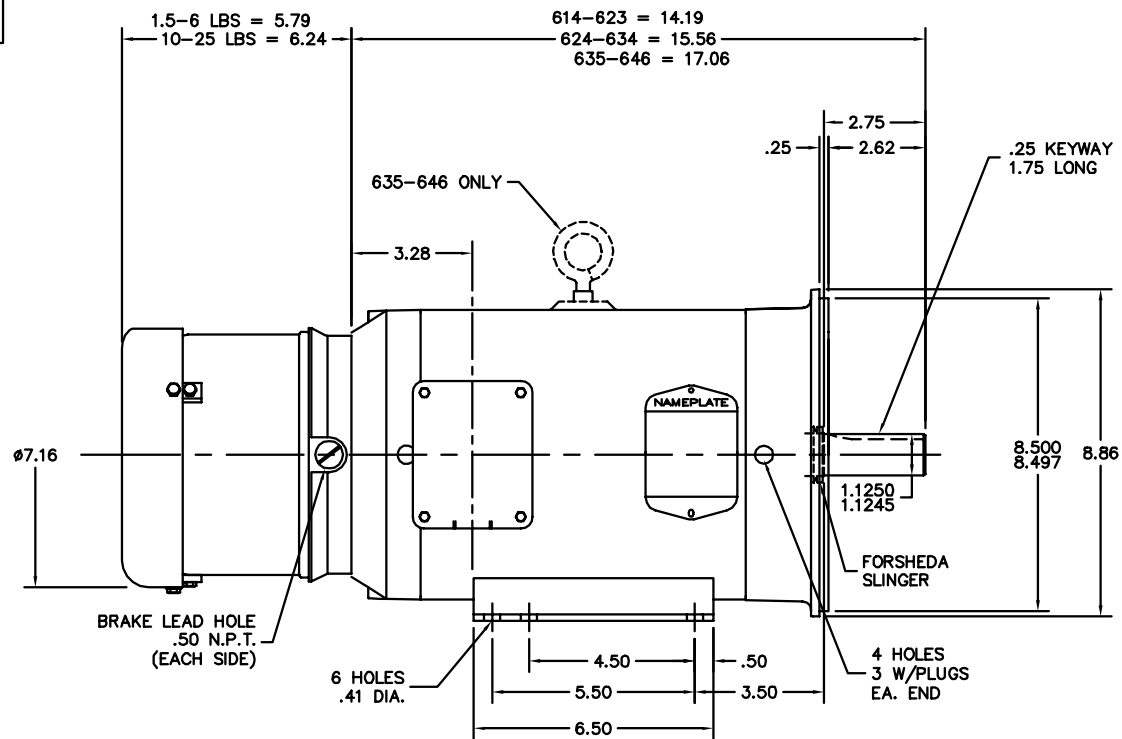


PULLEY END DETAIL

OMIT LOCK WASHER
AND APPLY COAT OF
RED SEALER UNDER
RETAINER RING SCREW
HEADS

APPLY COAT OF RED
SEALER TO HOUSING
BEFORE PRESSING SEAL
IN

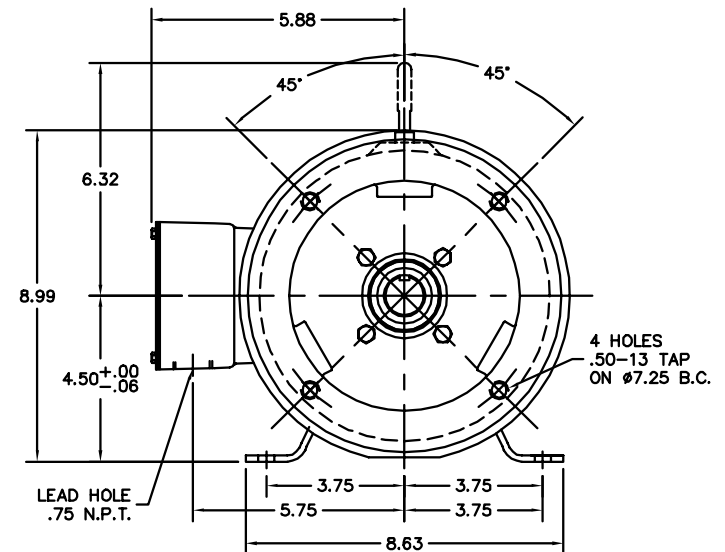

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT MOTOR PERFORMANCE IS SUITABLE IN THE APPLICATION.

REV. DESC: ADDED DRAIN PLUGS		
REV. LTR: E	VERSION: 03	TDR: 000000374458
FILE: \AAA\00072\408	REVISED: 09:50:43 08/26/2005	BY: ENKENTO
MTL: -		

BALDOR ELECTRIC Co.

HORZ 182-4TC 36M TEFC WD W/BRAKE