
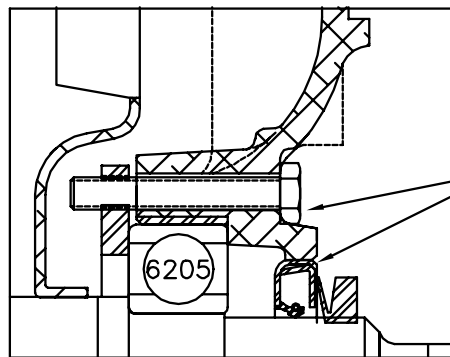
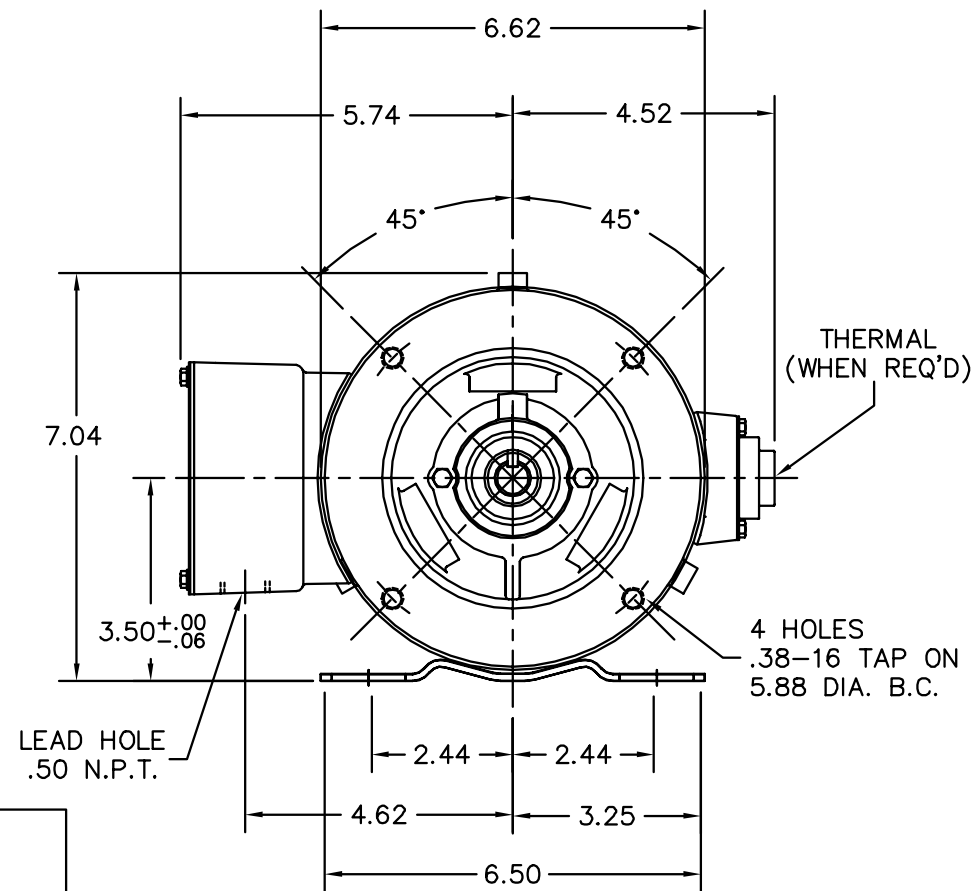


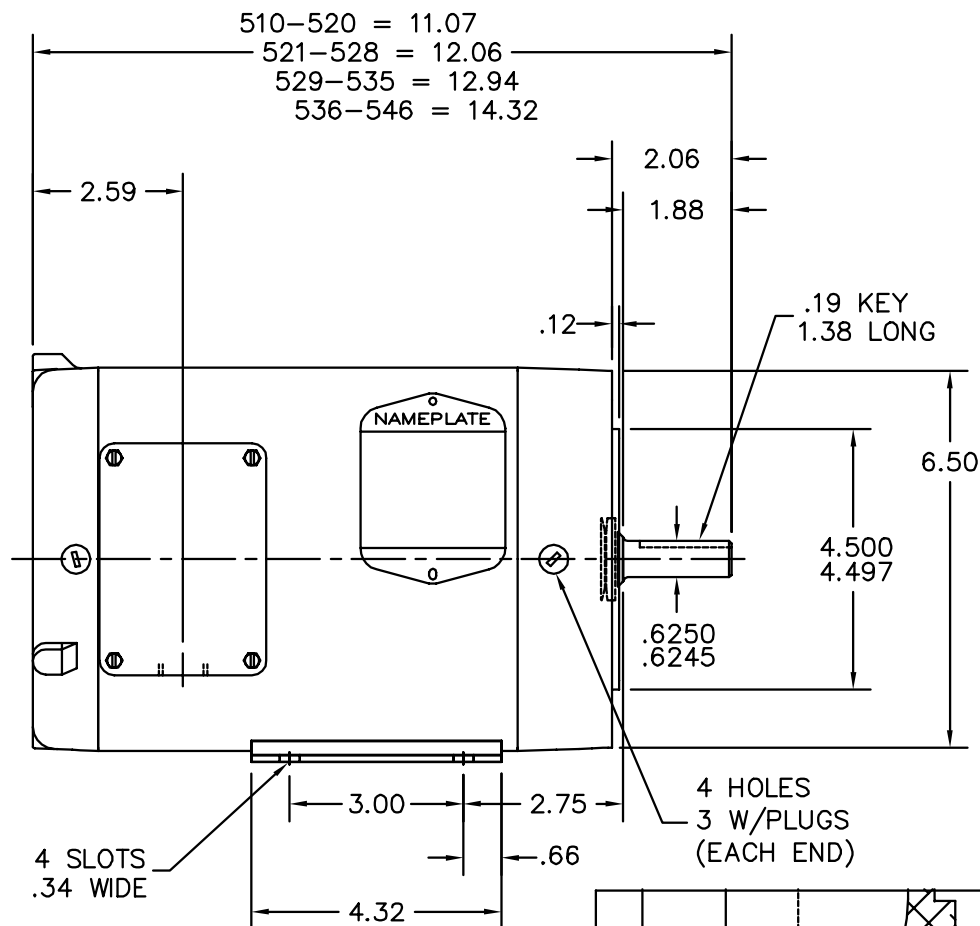

PULLEY END DETAIL

OMIT LOCK-WASHERS &
 APPLY RED SEALER UNDER
 BEARING RETAINER SCREW
 HEADS & HOUSING O.D.
 BEFORE PRESSING IN SEAL

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT MOTOR PERFORMANCE IS SUITABLE IN THE APPLICATION.

REV. DESC: CORRECT 'C' DIMS CALLED OUT

REV. LTR: D

VERSION: 04

TDR: 000000462979

BALDOR • DODGE • RELIANCE

35LYT964

FILE: \AAA\00111\429

REVISED: 08:55:36 04/22/2008

STD HORZ 56C TENV 35M WD (S/P #9), 2 POLE "W" BASE

MTL: -

BY: ENCHECO

SH 1 of 1