


D254T15M4A

General Purpose, Three Phase, Open Dripproof

High starting Torque – Dual Drilled feet -- Rolled Steel --AC Motor

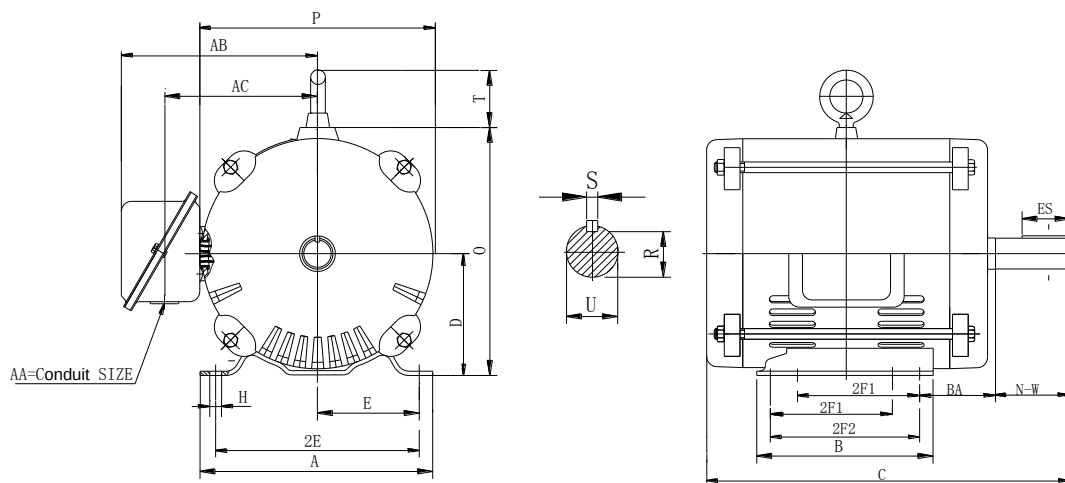

DIMENSIONS – INCHES

A	B	C	D	E	2F1	2F2	G	H	AC	O
12.5	11.25	20.7	6.25	5.0	10.0	8.25	NA	.53	8.25	11.5
P	R	S	T	U	ES	AA	AB	BA	N-W	Mount
11.5	1.416	.375	1.0	1.625	2.91	1.25	9.75	4.25	4.00	F1

PERFORMANCE DATA

Three Phase – 60Hz - 208-230/460V – NEMA Design C - Max. Ambient: 40° C

HP	Speed	Frame	NEMA Code	Efficiency (%)			Power Factor			Torque (ft-lb)		
				100%	75%	50%	100%	75%	50%	FLT	BDT	LRT
15	1750	254T	G	89.5	90.5	88.2	82.0	82.6	77.3	45.0	200	171
Amps (460V)		DE Bearing	ODE Bearing	Insulation Class	Enclosure Type	Service Factor	Weight (lbs)					
FLA	LRA											
18.1	116	6309ZZ	6208ZZ	F	ODP	1.15	198					



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632

Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546

www.naemotors.com