


A

B

C

D

- E
- Continuous resin flow impregnation
 - Rotation CW and CCW
 - Without overload protector at bearing
 - Without alarm thermal protection
 - Without switch off thermal protection
 - Color RAL 5009
 - Painting plan 203A
 - Mounting B3L(E)

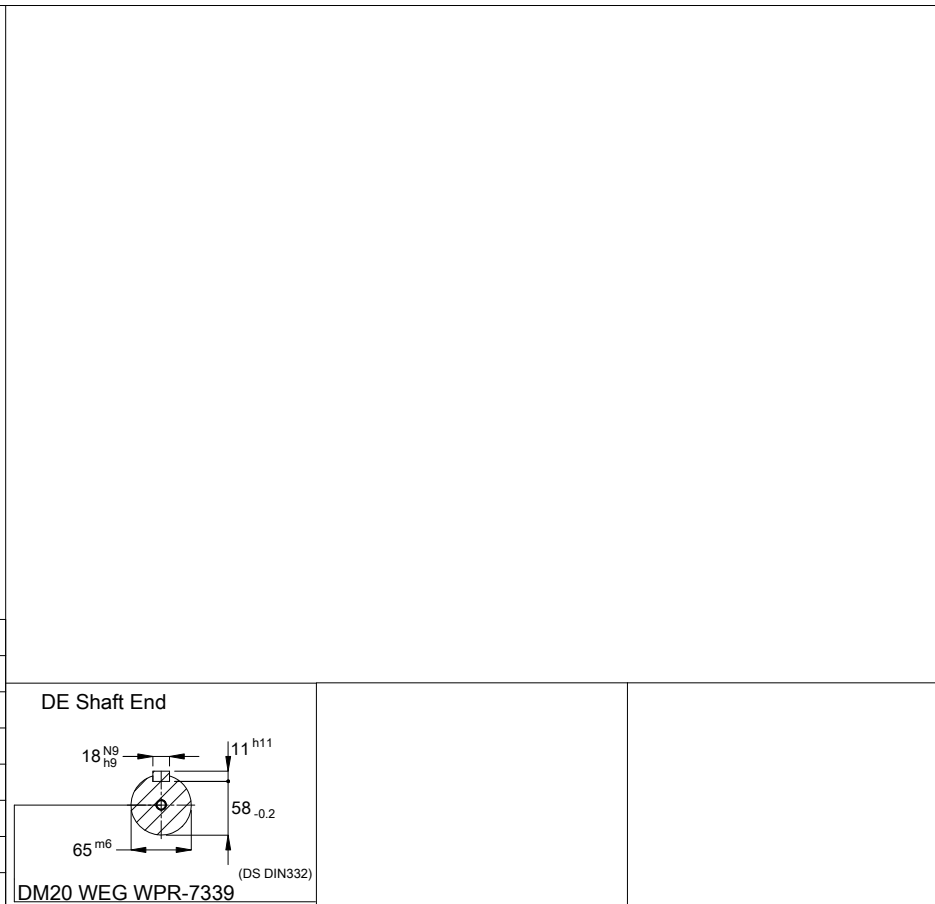

100 HP 02 Poles 60 Hz										A	
Scale 1 : 14											
HYBRISUSER										00	
ECM	LOC	SUMMARY OF MODIFICATIONS					EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER	THREE PH. MOTOR W22 IE4					PREVIEW				
CHECKED		FRAME 280S/M IP55 TEFC					WDD	00			
RELEASED							SHEET	1 / 1			
REL. DATE											