


Continuous resin flow impregnation
Rotation CW and CCW
Without overload protector at bearing
Without alarm thermal protection
Without switch off thermal protection
NDE endshield with electrically insulated bearing hub
Color RAL 5009
Painting plan 203A
Mounting B3L(E)

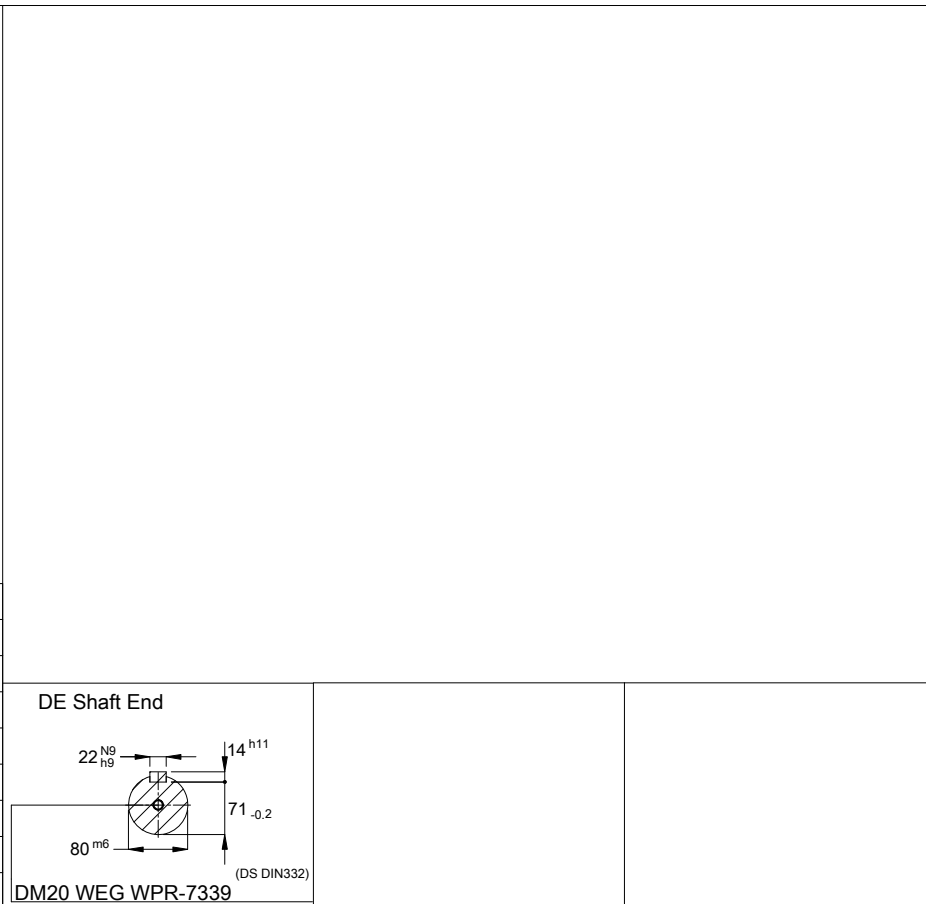

100 HP 06 Poles 60 Hz										A	
										Scale	1 : 15
										HYBRISUSER	00
ECM	LOC	SUMMARY OF MODIFICATIONS					EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER	THREE PH. MOTOR W22 IE4					PREVIEW				
CHECKED		FRAME 315S/M IP55 TEFC					WDD		00		
RELEASED							SHEET		1 / 1		
REL. DATE											

Dimensions in mm

A3