


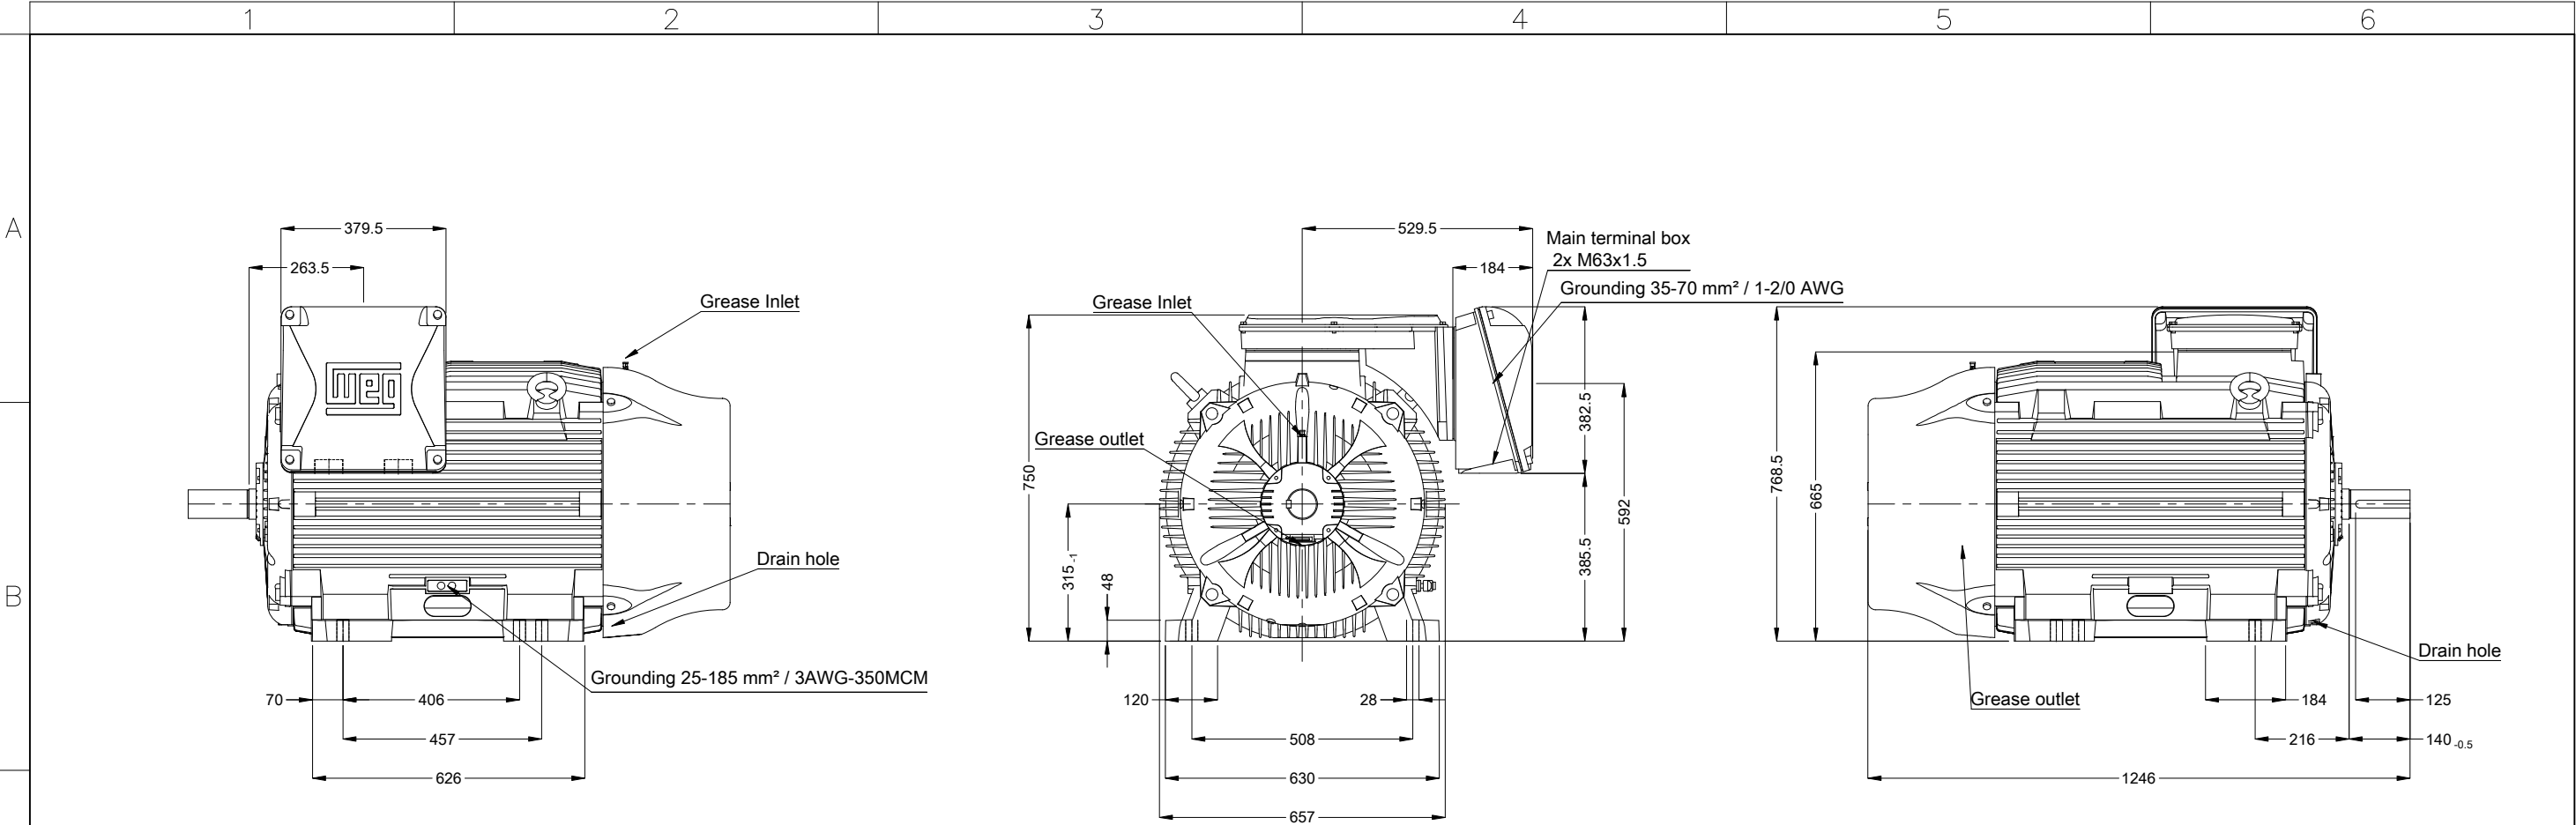

D										
150 HP 02 Poles 60 Hz										A
Continuous resin flow impregnation										
Rotation CW and CCW										
Without overload protector at bearing										
Without alarm thermal protection										
Without switch off thermal protection										
NDE endshield with electrically insulated bearing hub										
Color RAL 5009										
Painting plan 203A										
Mounting B3L(E)										

DE Shaft End										
DM20 WEG WPR-7339										

150 HP 02 Poles 60 Hz											A
Scale 1 : 15											
HYBRISUSER											00
ECM	LOC	SUMMARY OF MODIFICATIONS					EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER	THREE PH. MOTOR W22 IE4 FRAME 315S/M IP55 TEFC					PREVIEW				
CHECKED							WDD 00				
RELEASED							SHEET 1 / 1				
REL. DATE											