


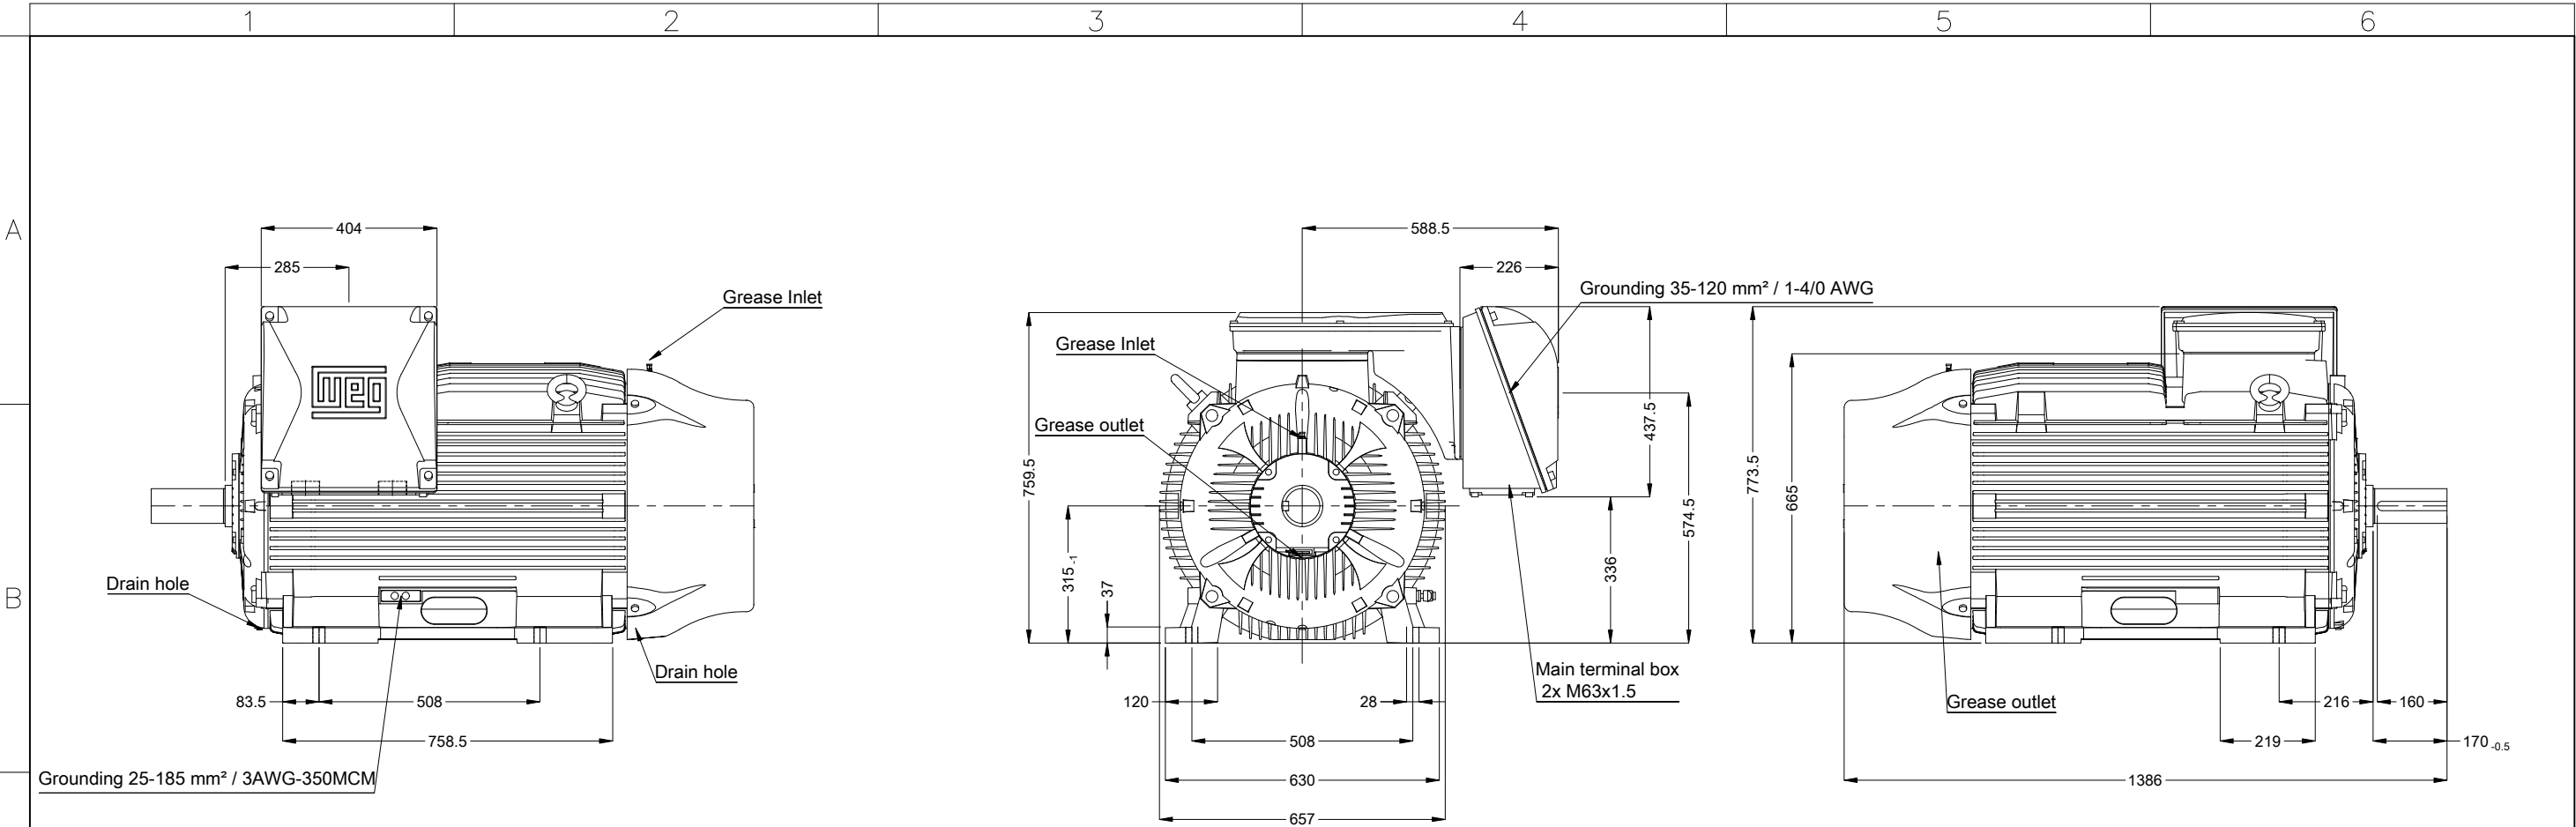



C

D

E

- Continuous resin flow impregnation
- Rotation CW and CCW
- Grease - Mobil Polyrex EM
- Without overload protector at bearing
- Without alarm thermal protection
- Without switch off thermal protection
- NDE endshield with electrically insulated bearing hub
- Color RAL 5009
- Painting plan 203A
- Mounting B3L(E)



200 HP 04 Poles 60 Hz										A
						Scale			1 : 15	
						HYBRISUSER				00
ECM	LOC	SUMMARY OF MODIFICATIONS				EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER	 THREE PH. MOTOR W22 IE4 FRAME 315L IP55 TEFC				PREVIEW				
CHECKED										
RELEASED										
EL. DATE						SHEET		1 / 1		