


Grounding for leads 25-185 mm² / 3AWG-350MCM

Bearing	Quantity grease(g)
Bearing NDE	10
Bearing DE	10

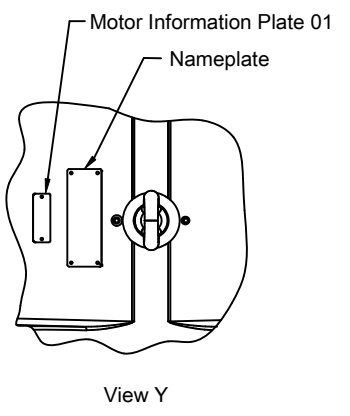

Bearing		Lubricant	
DE	6314-C4	MOBIL POLYREX EM	
NDE	6314-C4	MOBIL POLYREX EM	

400 HP 02 Poles 60 Hz A

WEG HOUSE ACCOUNT MOTORS

Inc representação furo lateral cx lig				FABIOMP	RONALDOCG	RONALDOCG	12.02.2026	01
DOCUMENTO NOVO:422232373				MIRIANEV	PAOLLA	MARLONN	22.04.2024	00
ECM	LOC	SUMMARY OF MODIFICATIONS		EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	MIRIANEV	THREE PH. MOTOR W40 NEMA PREM. EFF.		1523479128				
CHECKED	PAOLLA	FRAME 447/9TS IP23 ODP		WDD	01			
RELEASED	MARLONN			SHEET		1 / 1		
REL. DATE	22.04.2024			WMO	JARAGUA DO SUL	[Engenharia de Produto]		

- Bearings relubrication interval 1200h
- Space heaters 110-127 V / 200-240 V
- NDE endshield with electrically insulated bearing hub
- Color RAL 5009
- Painting plan 203A
- Mounting NEMA F-1
- Mounting B3R(D)

