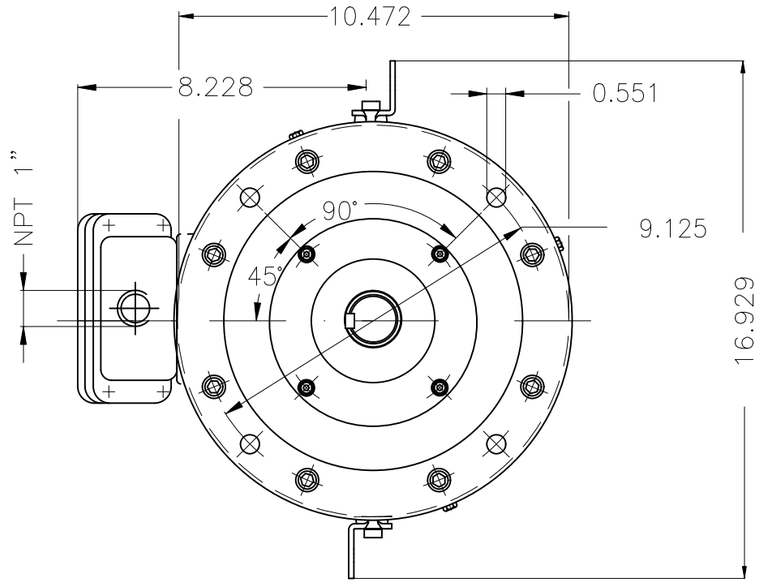

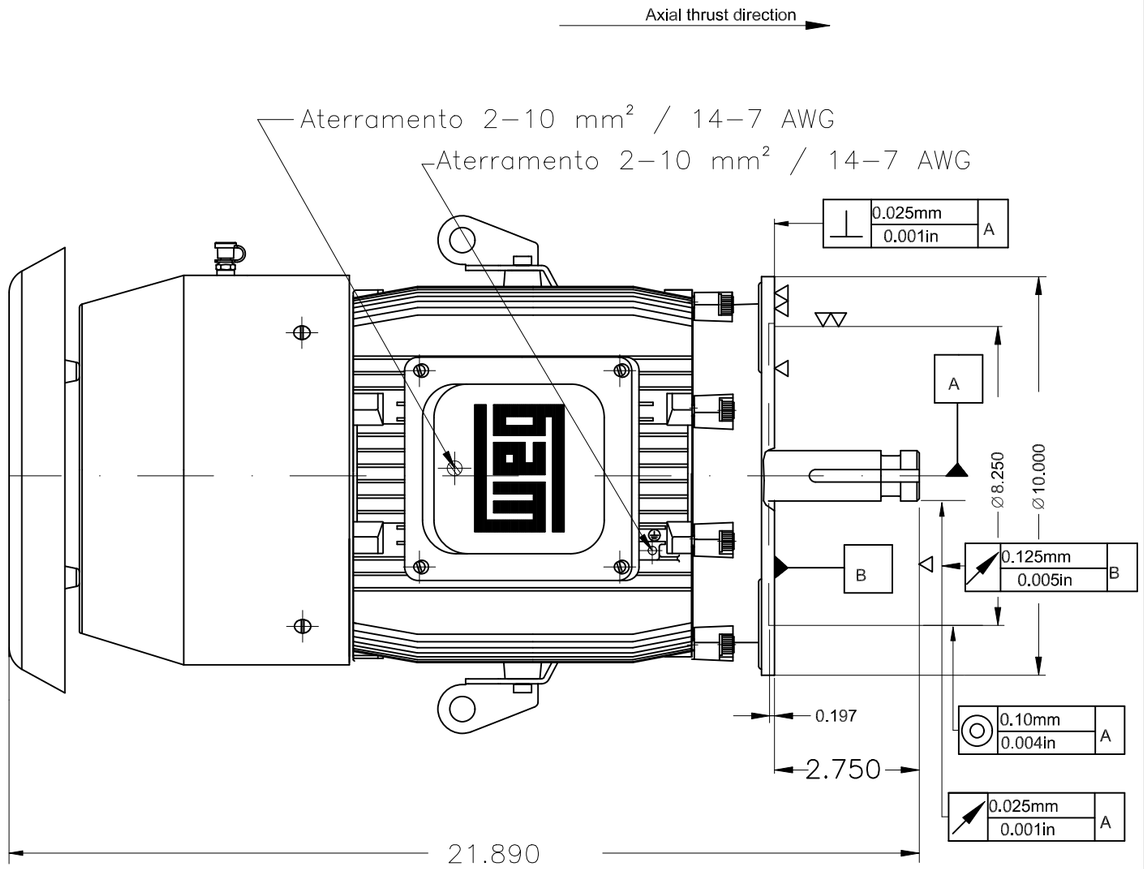

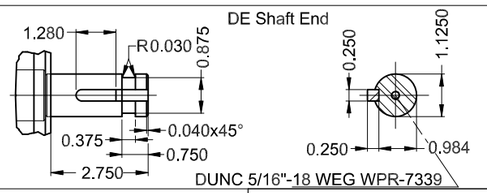



Design B
Type "T" threaded drain plug
Permatex on the screws
Special balancing with half key
Stainless Steel Grease fitting
Class F insulation - 80K temperature rise
Tropicalized internal painting according to IEEE841
Shaft material - SAE/ABNT 1040/45
Rotation CW and CCW
Double grounding
Grease outlet according to IEEE841
Aluminum fan
Bearing cap
Certification CSA/UL
Fan coated with epoxy coating
Sealing - INPRO/SEAL
Tirroil oil applied on endshields fittings
Color RAL 5009
Painting plan 202E
Service factor 1.15
Mounting NEMA W-6
Mounting V1

	Bearing	Lubricant
DE	6206	MOBIL POLYREX EM
NDE	7306BECB	MOBIL POLYREX EM

5 HP 02 Poles 60 Hz

A

NEMSCO - BATON ROUGE

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
		Furação da flange	JONATHANDC	DECIOP	DECIOP	02.06.2025	05
		.	PIRWBUSER	JESSICA	JESSICA	04.03.2025	04

EXECUTED	CRANGHETTI	THREE PH. MOTOR IN LINE EXTRA THRUST NEMA PREM. EFF	1608303584
CHECKED	TIAGOZ	FRAME 184LP IP55 TEFC	WDD 05
RELEASED	GUILHERMEMC		
REL. DATE	06.12.2024	WMO JARAGUA DO SUL [Engenharia de Produto]	SHEET 1 / 1

PRELIMINARY DOCUMENT - Not to be used for installation purposes.

Dimensions in inches

XME A3

WEG's property. Forbidden reproduction without previous authorization.

10012892293-3