


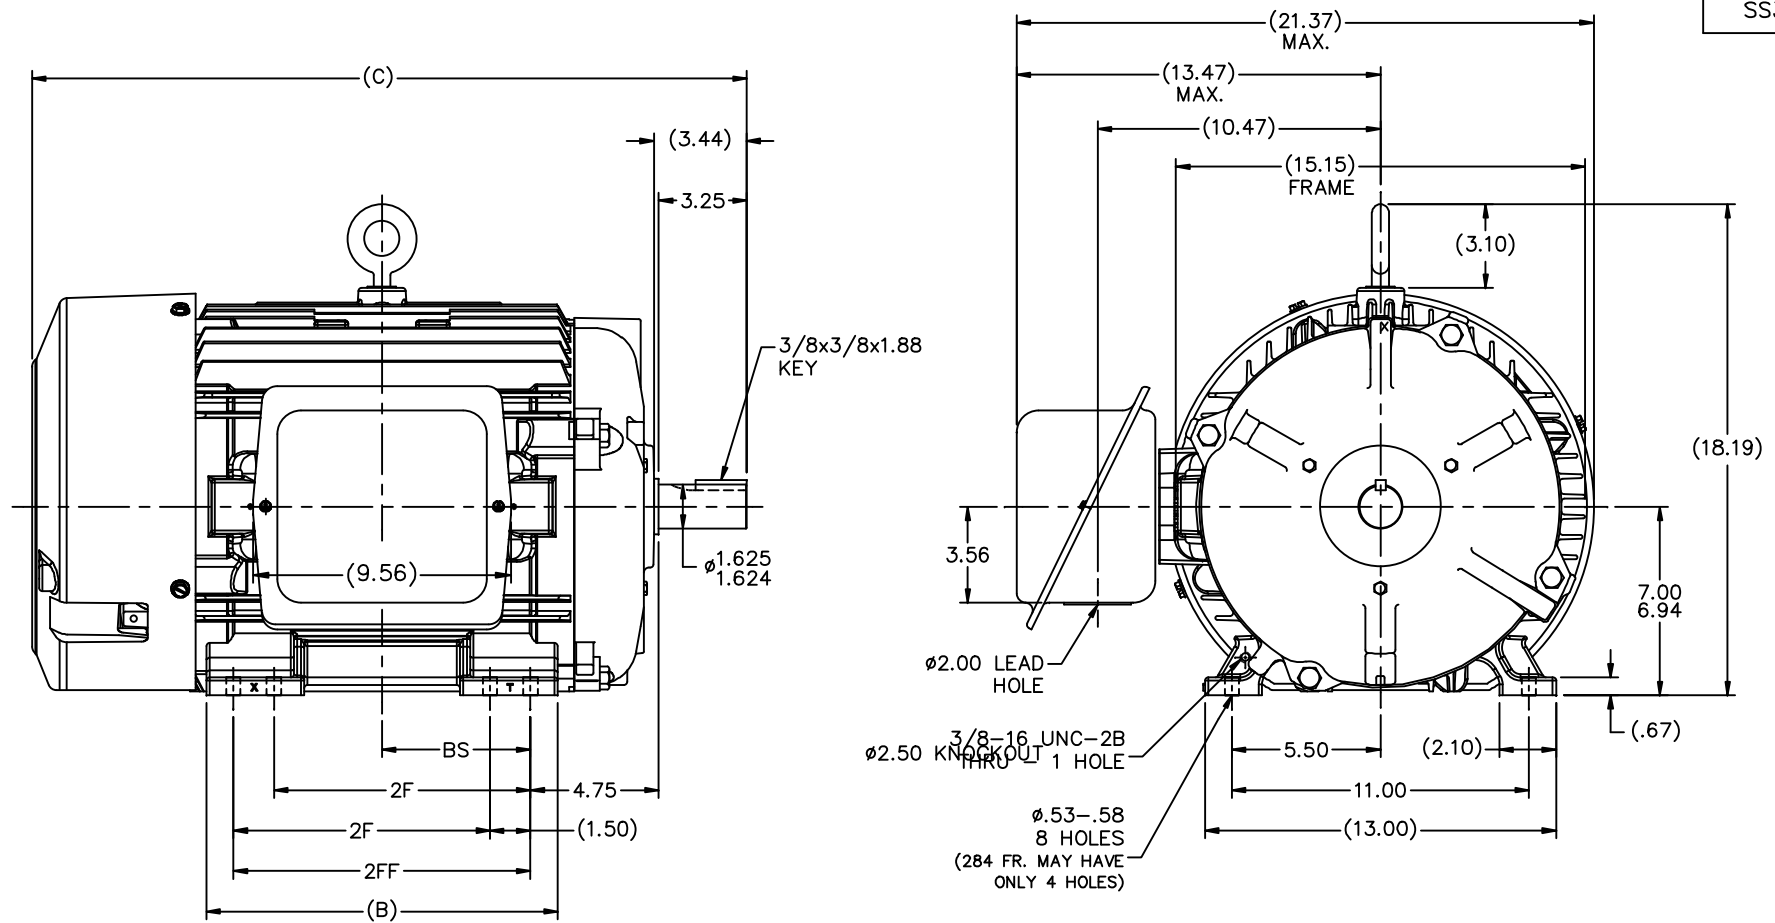

NOTES:

1. CONDUIT BOX CAN ONLY BE ROTATED CLOCKWISE UP TO 270° FROM ITS ORIGINAL POSITION.
2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.
3. NAMEPLATES TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

DASH	FRAME	B	C	2F	2FF	BS
1275	284TS	12.50	24.97	9.50		4.75
1425	284/86TS	13.00	26.47	9.50	11.00	5.50

				TOLERANCES UNLESS SPECIFIED		MARATHON ELECTRIC	DRAWN DAH 03-28-2001			
				DEC.	INCHES		CHK	ML	03-28-2001	
4	UPDATED TO NEW FRAME DESIGN	MU109540	MSG 06-30-2012	BW	.X	±.1		APPD	BW	03-28-2001
3	REVISED DRAWING		RJW 04-05-2007		.XX	±.03		SCALE	7=32	
2	REDRAWN IN AUTOCAD		TAT 06-29-2004	ML	.XXX	±.005		REF		
1	NEW DRAWING	MU36545	DAH 03-28-2001		.XXXX	±.0005		FMF		
NO. REVISION				BY & DATE	CHK	ANG	FINISH			
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT				RFP			CAD FILE ss311134	SIZE	DRAWING NO.	PAGE OF
				DIST				B	SS311134	3