
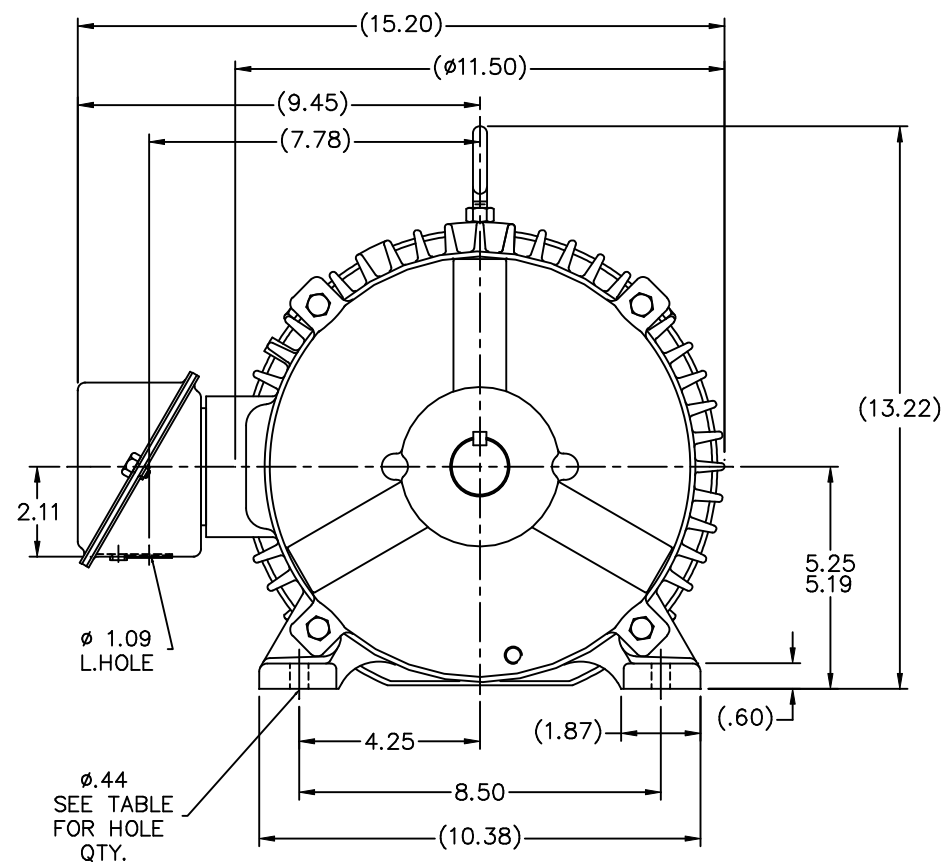


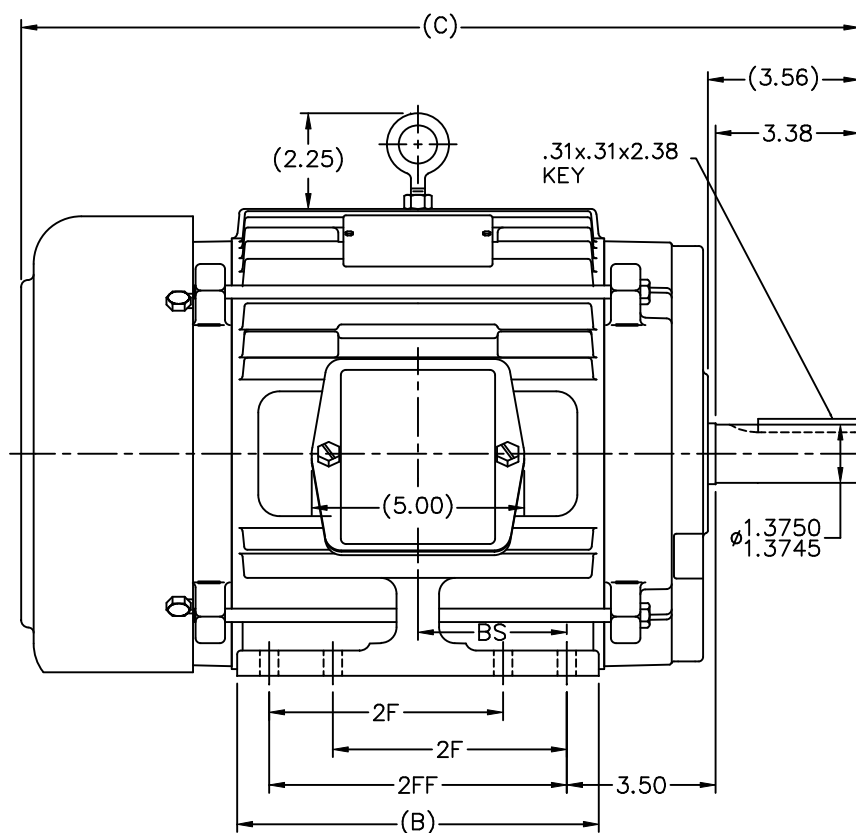

NOTES:

1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.
2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.
3. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR

DASH	FRAME	B	C	2F	2FF	BS	FOOT HOLE QTY.	MOUNTING
725	213T	7.00	18.20	—	5.50	2.75	4	F1 OR F2
875	215T	8.50	19.70	—	7.00	3.50	4	F1 OR F2
875	213/5T	8.50	19.70	5.50	7.00	3.50	8	F1 OR F2
1000	213T	9.75	20.95	5.50	8.25	4.12	8	F1 OR F2
1000	215T	9.75	20.95	7.00	8.25	4.12	8	F1 OR F2

					TOLERANCES UNLESS SPECIFIED		DRAWN SMC 04-07-1993
					DEC. INCHES		CHK ML 04-12-1993
7	ADDED FOOT HOLE QTY. & MTG. TO TABLE	CN 37322	TAT 01-14-2004	ML	X ±.1		APPD GK 04-19-1993
6	UPDATED C' BOX GEOMETRY	CN 28425	DRS 01-27-2000	.XX	±.03		SCALE 11=32
5	ADDED DASHES 725 & 1000 WAS 'A' SIZE	CN 27451	MRB 04-13-1999	.XXX	±.005		REF
4	5.25/5.19 DIM. WAS 5.25/5.22	CN 16763	MRB 05-03-1995	.XXXX	±.0005		FIMF
NO.	REVISION		BY & DATE	CHK	ANG ±7°30"	FINISH	PREV
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORKED DRAWING ALL RIGHTS OF DESIGN ARE RESERVED. THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT					RFP	INVD FILE ss84278	
				DIST LB		SIZE B	DRAWING NO. SS84278
						PAGE OF 7	REV. 7