



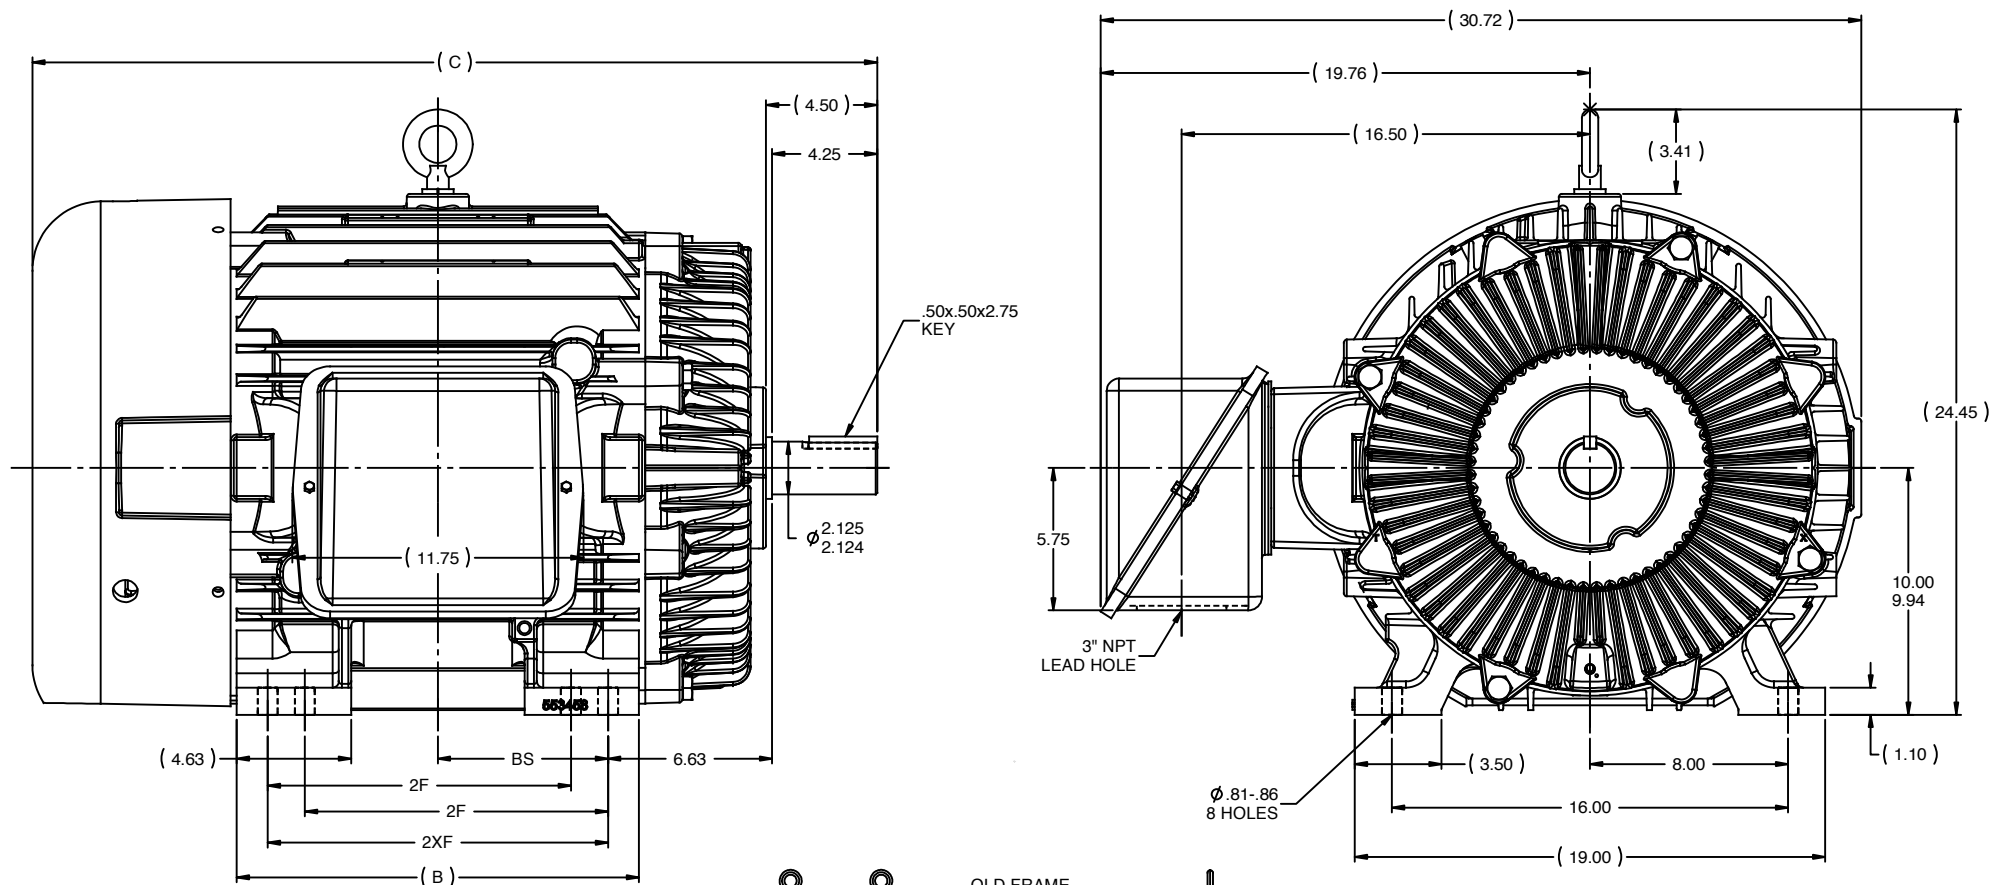

- NOTES:
1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.
 2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°
 3. NAMEPLATES TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

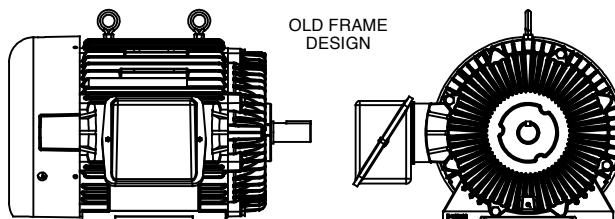

DASH	FRAME	B	C	BS	2F	2XF
1525	404TS	14.75	32.63	6.12	12.25	---
1675	404/405TS	16.25	34.13	6.88	12.25	13.75

REVISION				TOLERANCES UNLESS SPECIFIED		MARATHON ELECTRIC	DRAWN TLB 05-19-1988	
NO	REVISION	BY & DATE	CHK	ANG	±		CHK	FG 05-20-1988
8	REDRAWN IN SOLIDWORKS W/ L.W. FRAME MU98878	EDK 11/29/2010	MH	DEC	INCHES	TITLE OUTLINE 400TS/US FR. - TEFC - STD.	APPR	ML 05-22-1998
7	UPDATED FRAME & ADDED 404 INFO CN27430	KL 10-25-2005	X		±.1			
6	REDRAWN IN AUTOCAD	TAT 06-29-2004	XX		±.03			SCALE 1:5
5	ADDED NEMA 'O' DIM.	MRB 09-12-1996	XXX		±.005			REF
4	REDRAWN ON CADD	TLB 05-19-1988	XXXX		±.0005	MATL		FMF
				CHK	ANG	±7°30'	PAGE OF	
THIRD ANGLE PROJECTION				RFP		PREV	SIZE	DRAWING NO
				NETWORK FILE NAME SS509125			B	SS509125
								REV 8