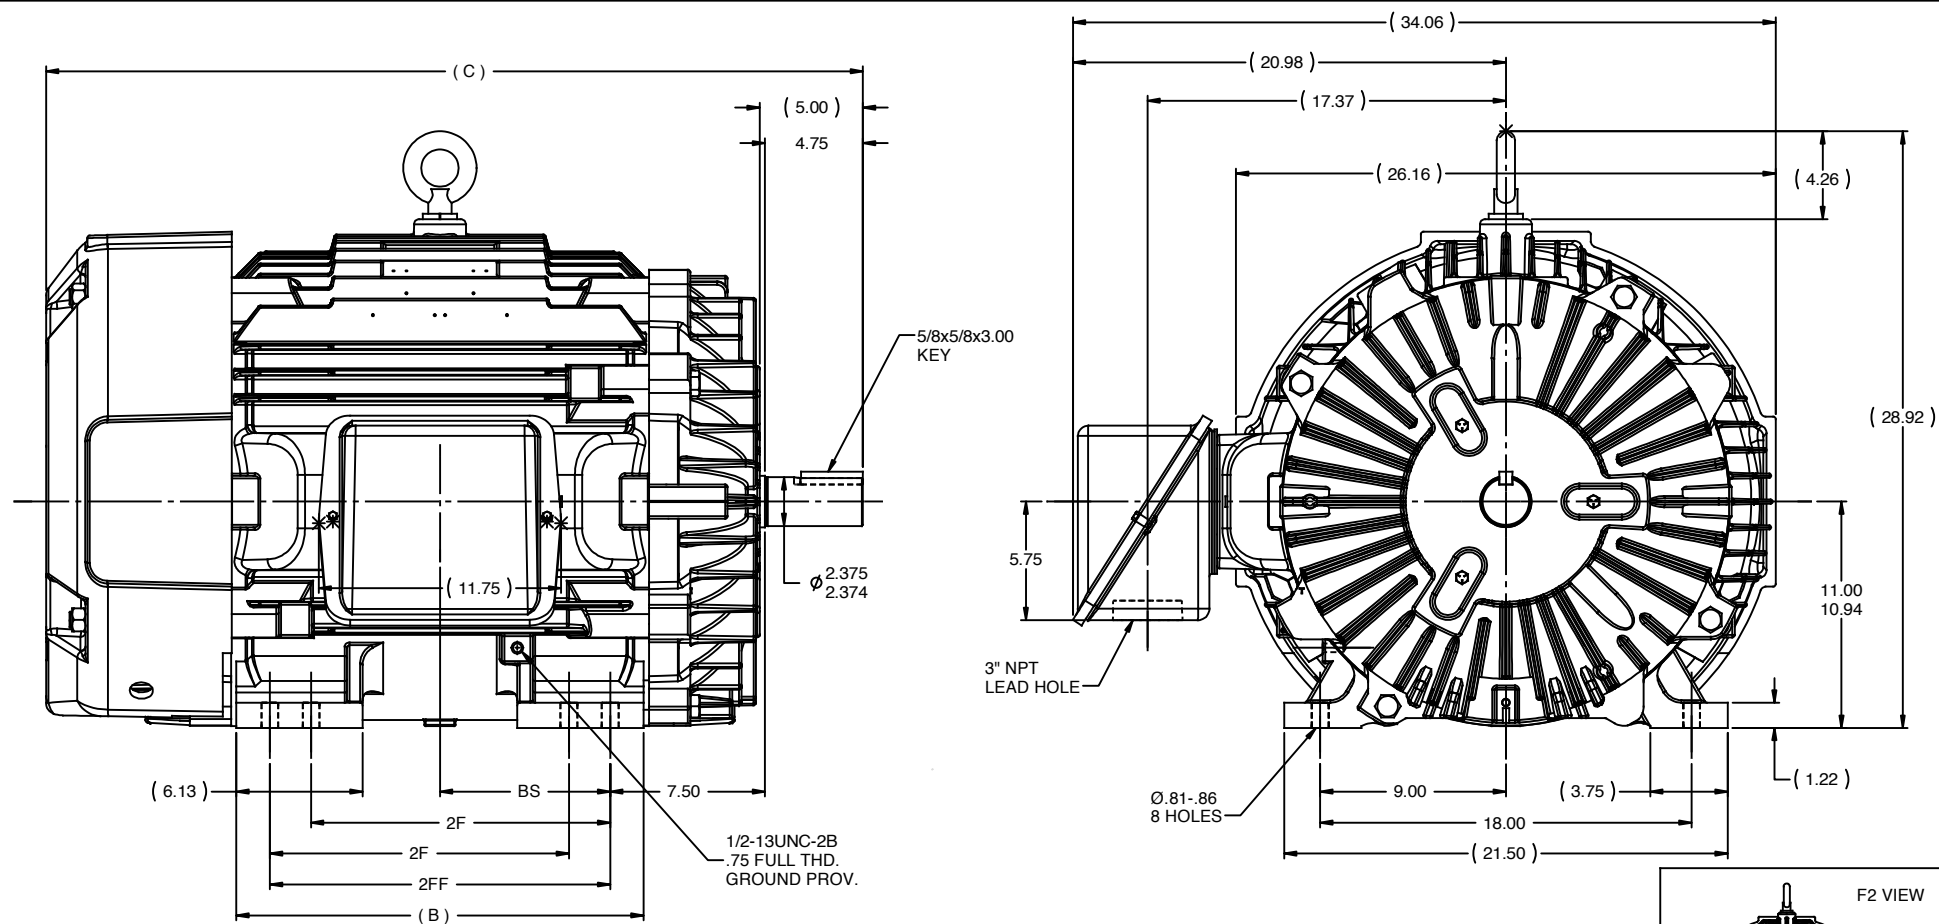


- NOTES:
1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.
 2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.
 3. NAMEPLATES TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

DASH	FRAME	B	C	2F	2FF	BS
2025	444/445TS	19.75	39.62	14.50	16.50	8.25

10	UPDATED WITH NEW FRAME PER ISAAC 09-5049	JJB 6/29/2010	TOLERANCES UNLESS SPECIFIED	DEC	INCHES		DRAWN RM 06-19-1991
9	REV. FAN GUARD & C-DIM. PER CN39335	RWR 6/29/2010	ML	X	±.1		CHK TLB 06-28-1991
8	REDRAWN IN AUTOCAD	TAT 06/29/2004	XX	XX	±.03		APPR ML 06-28-1991
7	REVISED "C" DIM. CN 26153	KL 01/22/1999	XXX	XXX	±.005		SCALE 1:6
6	RE-ISSUE "C" DIM. WAS 37.44 & 39.44	BLR 06/10/1997	XXXX	XXXX	±.0005		REF
5	UPDATED TO SHOW NEW FRAME AND LIFT LUGS CN21946	PGK 01/22/1997	CHK	ANG	±1/2"	MATL	FMF MU96082
NO	REVISION	BY & DATE	RFP	PREV	FINISH	SIZE	PAGE OF
	THIRD ANGLE PROJECTION		NETWORK FILE NAME	SS514022	B	DRAWING NO	REV
						SS514022	10