
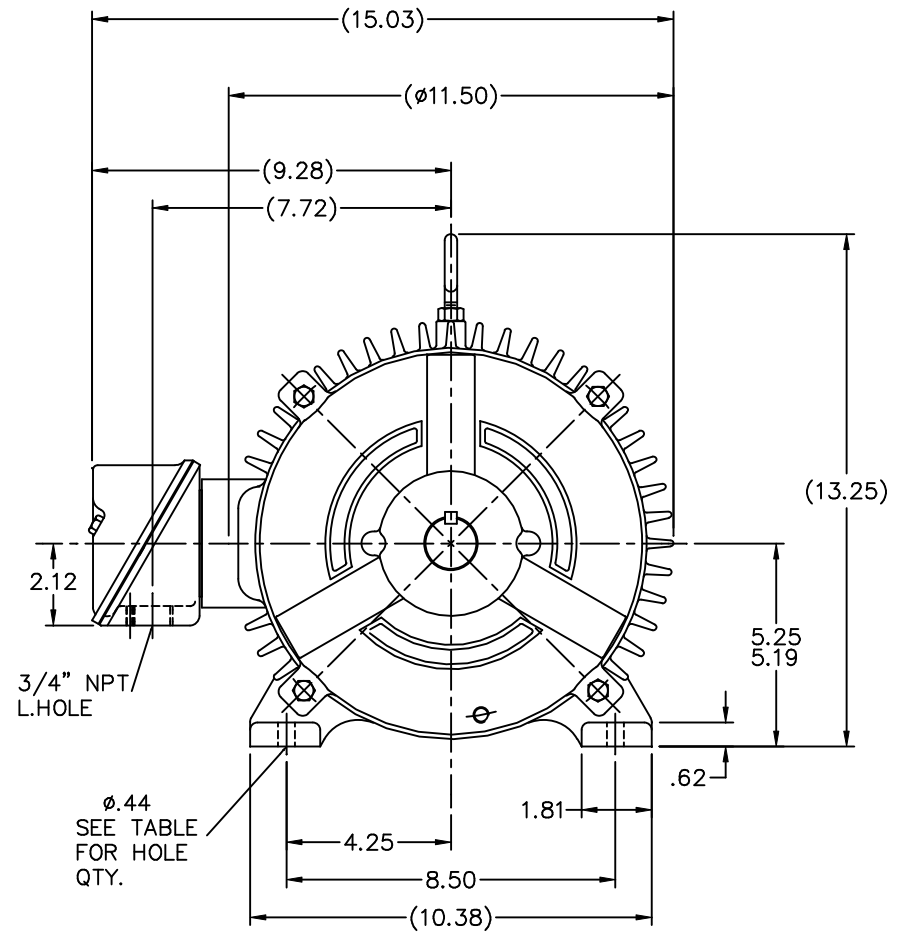


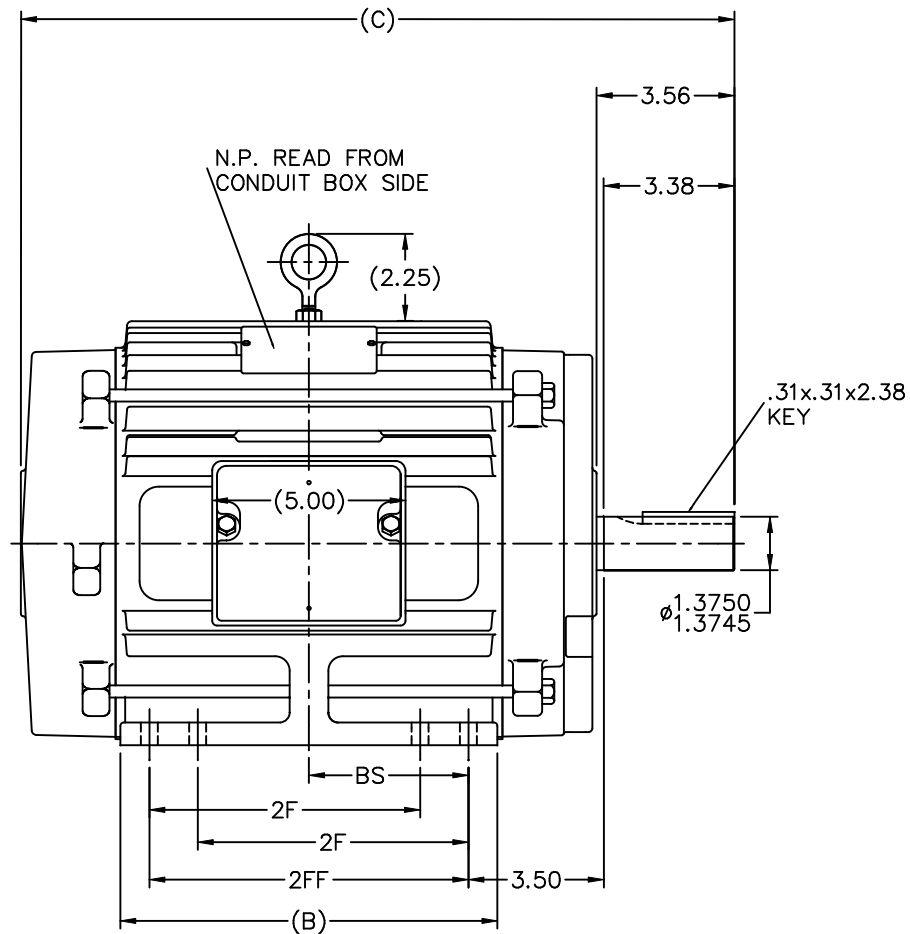

NOTES:

1. BOX CAN BE ROTATED IN 90° STEPS.
2. BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.

(REPLACES A-SS87840)

DASH	FRAME	B	2F	2FF	BS	C	FOOT HOLE QTY.	MOUNTING
725	213T	7.00	—	5.50	2.75	15.69	4	F1 OR F2
875	215T	8.50	—	7.00	3.50	17.19	4	F1 OR F2
875	213/5T	8.50	5.50	7.00	3.50	17.19	8	F1 OR F2
1000	213T	9.75	5.50	8.25	4.12	18.44	8	F1 OR F2
1000	215T	9.75	7.00	8.25	4.12	18.44	8	F1 OR F2

				TOLERANCES UNLESS SPECIFIED		MARATHON ELECTRIC	DRAWN BRH 06-17-1996			
NO.	REVISION	BY & DATE	CHK	ANG	±7°30"		CHK	KL	06-28-1996	
8	CLARIFIED EXT. DIMENSION	MU43615	TAT	02-13-2004	ML	DEC.	INCHES			
7	ADDED FOOT HOLE QTY. & MTG. TO TABLE	CN 37322	TAT	01-14-2004	ML	.X	±.1			
6	FOOT HOLES WERE 4 NOW 8	CN 29200-450	DRS	05-16-2000	.XX	±.03				SCALE 5=16
5	REVISED CONDUIT BOX	CN 28426	NJS	01-18-2000	.XXX	±.005				REF
4	AD'D '213/15 MAY ONLY HAVE..' NOTE	CN 27400-361	BLR	08-31-1999	.XXXX	±.0005				FMF
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT							PREV			
							RFP			
							DIST LB			
							CAD FILE ss85995			
							SIZE	DRAWING NO.	PAGE	OF
							B	SS85995	8	REV.

ERROR: undefined
OFFENDING COMMAND: Pscript_WinNT_
STACK: