


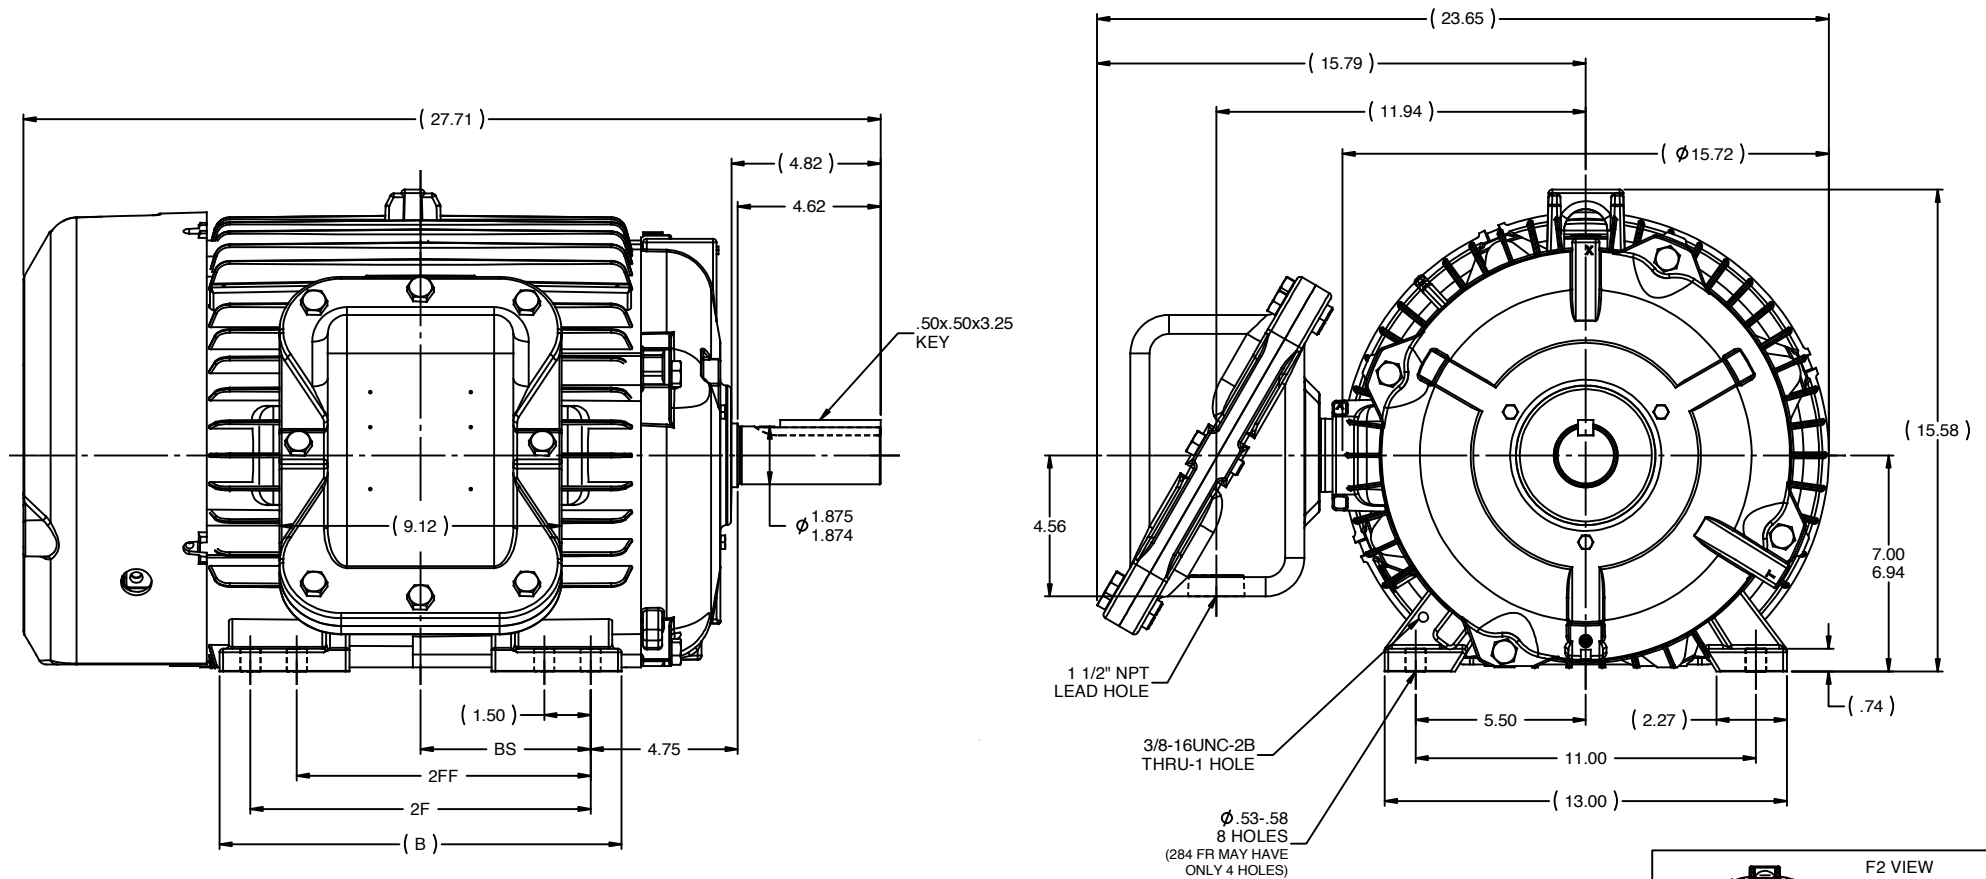

NOTES:

1. CONDUIT BOX CAN ONLY BE ROTATED CLOCKWISE UP TO 270° FROM ITS ORIGINAL POSITION.
2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°. THIS MODIFICATION CAN BE PERFORMED ONLY BY THE ORIGINAL EQUIPMENT MANUFACTURER OR BY A FACILITY THAT IS COVERED UNDER UNDERWRITERS LABORATORIES INC. CATEGORY PTKQ, TITLED "MOTORS AND GENERATORS, REBUILT FOR USE IN HAZARDOUS LOCATIONS".
3. NAMEPLATES TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

DASH	FRAME	B	C	BS	2F	2FF	
1275	284T	12.50	26.21	4.75	9.50	---	
1425	284/6T	13.00	27.71	5.50	11.00	9.50	

				TOLERANCES UNLESS SPECIFIED			DRAWN HLB 10/10/2002		
				DEC	INCHES		CHK	ML 10/10/2002	
				X	±.1		APPR	DD 10/10/2002	
				XX	±.03		SCALE	1:4	
2	ADDED F2 VIEW	TJW 4/8/2011	CTO:XXX	±.005		TITLE	OUTLINE - EXP.PR. - TGN	REF	
1	NEW DRAWING MU43527	HLB 10/10/2002	DD:XXX	±.005			280T FR. - BB - STD - 12.50 LAM	FMF	
NO	REVISION	BY & DATE	CHK	ANG	±7'30"	FINISH	PAGE	OF	REV
	THIRD ANGLE PROJECTION		RFP			PREV	SIZE	DRAWING NO	
							B	SS311106	2
						NETWORK FILE NAME	SS311106		