


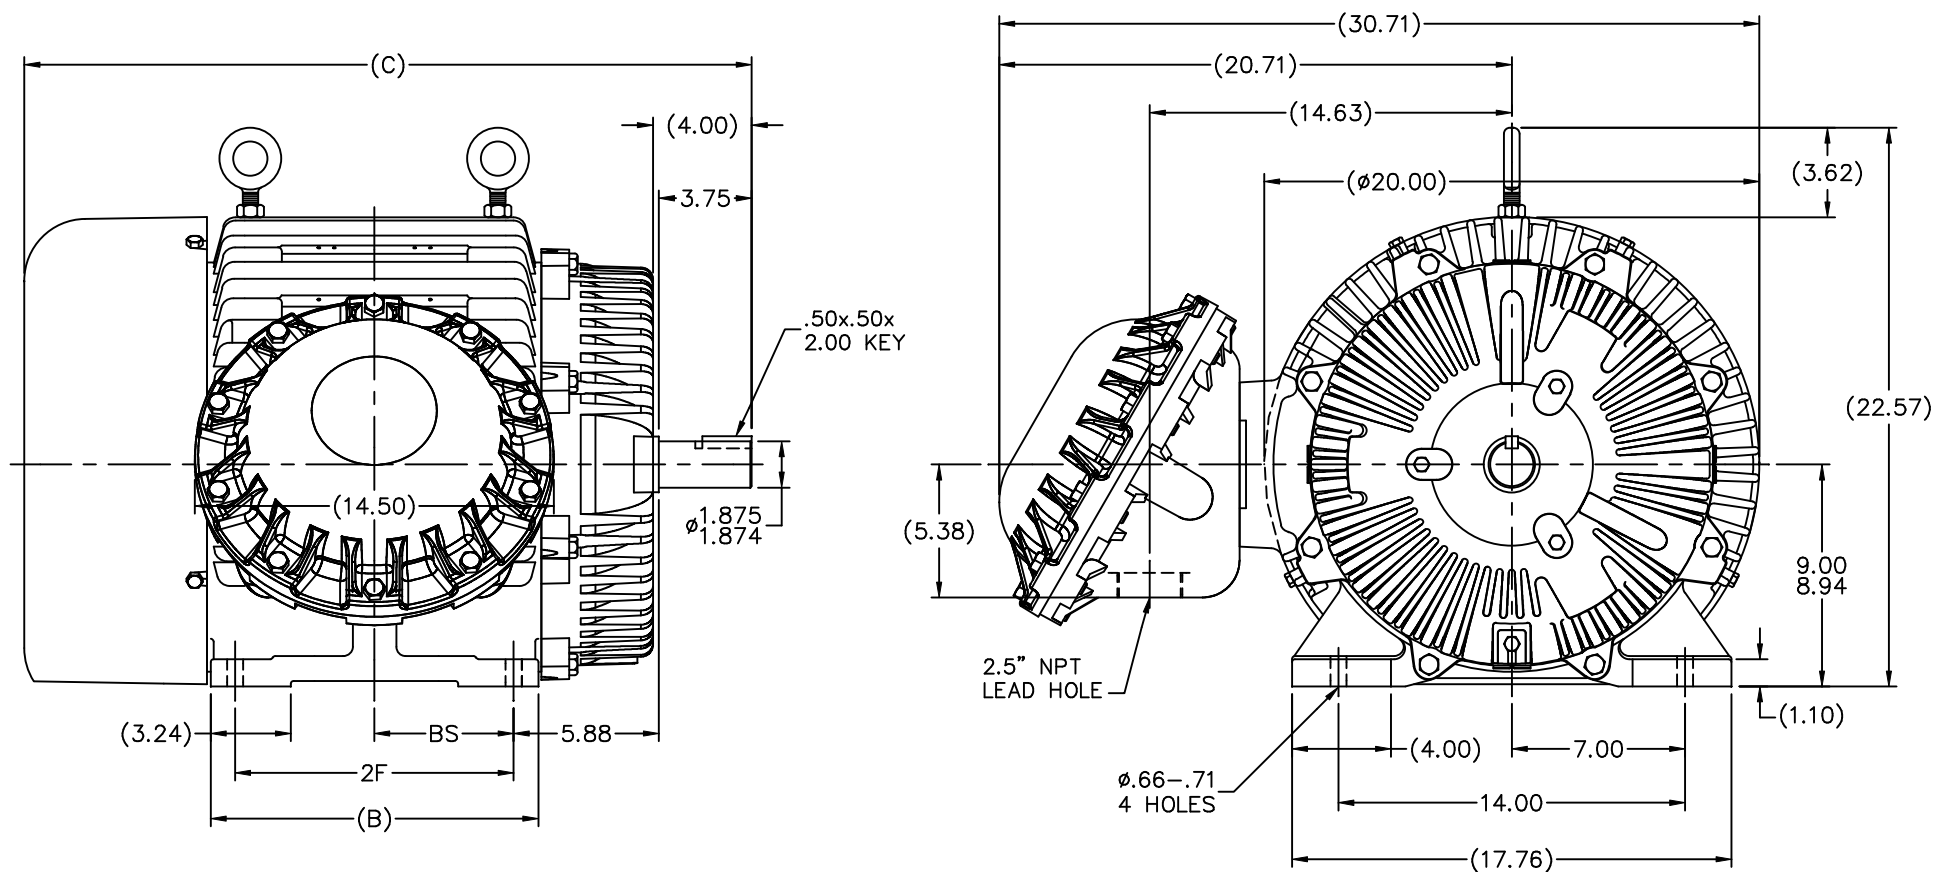

NOTES:

1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.
2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.
3. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

(REPLACES B-SS503646)

DASH	FRAME	B	C	2F	BS
1350	364TS	13.25	29.38	11.25	5.62
1450	365TS	14.25	30.38	12.25	6.12

		TOLERANCES UNLESS SPECIFIED		MARATHON ELECTRIC		DRAWN KL 07-23-2001	
		DEC.	INCHES			CHK	DJK 07-23-2001
		.X	±.1			APPD	JES 07-23-2001
3	UPDATE OUTLINE WITH NEW D.E. BRACKET	JJB	06/21/2007	ML	.XX	±.03	TITLE OUTLINE
2	REDRAWN IN AUTO CAD	TAT	06-29-2004	ML	.XXX	±.005	360TS FR. - EXP. PR.
1	NEW DRAWING	MU38273	KL 07-23-2001	ML	.XXXX	±.0005	MAT'L
NO.		REVISION		BY & DATE		CHK	
						ANG	
						±7°30"	
						FINISH	
						CAD FILE ss518623	
						SIZE	
						DRAWING NO.	
						PAGE OF	
						REV.	
						3	