


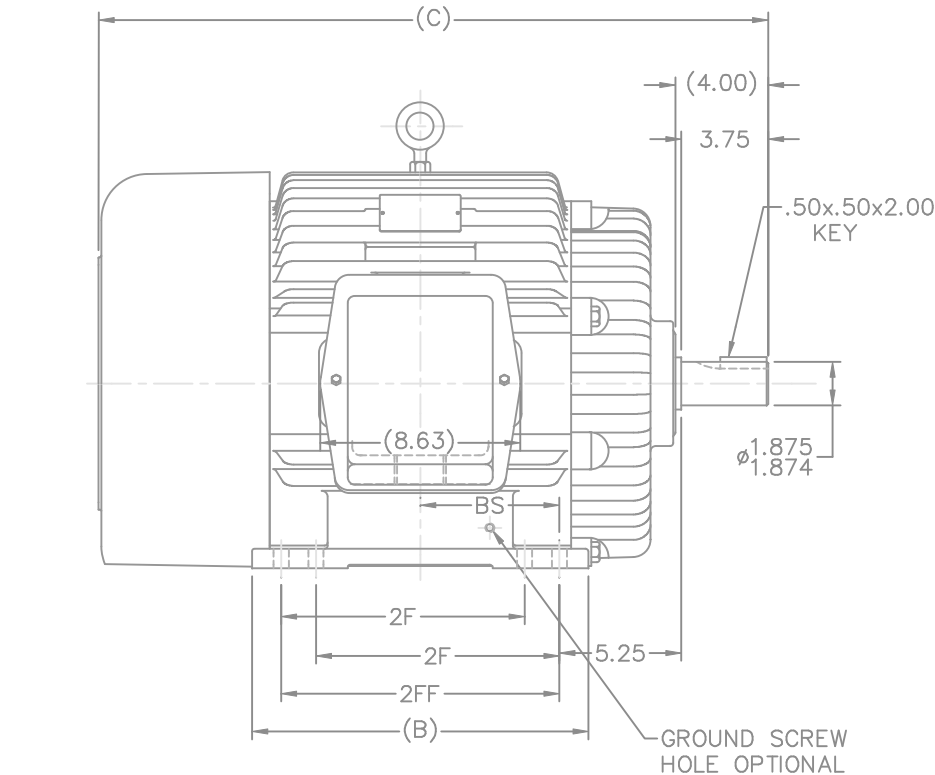

1. BOX CAN BE ROTATED IN 90° STEPS.
2. BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.
3. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

DASH	FR.	C	B	BS	2F	2FF	FOOT HOLE QTY	MOUNTING
1150	324TS	27.37	13.00	5.25	—	10.50	4	F1 OR F2
1300	324/6TS	28.87	14.50	6.00	10.50	12.00	8	F1 OR F2
1450	326TS	30.37	15.00	6.75	12.00	13.50	8	F1 OR F2

15	ADDED GROUND SCREW HOLE	RJW 06-07-2005	ML	TOLERANCES UNLESS SPECIFIED		DRAWN	RW 01-12-1993
14	REVISED DASH 1450 2FF WAS 12.00 CN33798	RJW 03-22-2005	ML	DEC. INCHES		CHK	ML 01-12-1993
13	ADDED DASH 1450 CN33599	TAT 08-03-2004	ML	.X ±.1		APPD	GK 01-12-1993
12	ADDED FOOT HOLE QTY. & MTG. TO TABLE CN37323	TAT 12-09-2003	ML	.XX ±.03		SCALE	3=16
11	UPDATED C'BOX GEOMETRY CN28424	DRS 01-06-2000		.XXX ±.005		REF	
10	RE-ISSUE ADDED HOLE SIZE CN26835	CAE 04-28-1999		.XXXX ±.0005	MAT'L	FMF	
NO.	REVISION	BY & DATE	CHK	ANG ±.730"	FINISH	PREV	
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH DESIGN AND CONSTRUCTION OF OUR WORK. ALL RIGHTS ARE RESERVED. THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT					CAD FILE ss28706 DIST	SIZE B DRAWING NO. SS28706	PAGE OF 1