
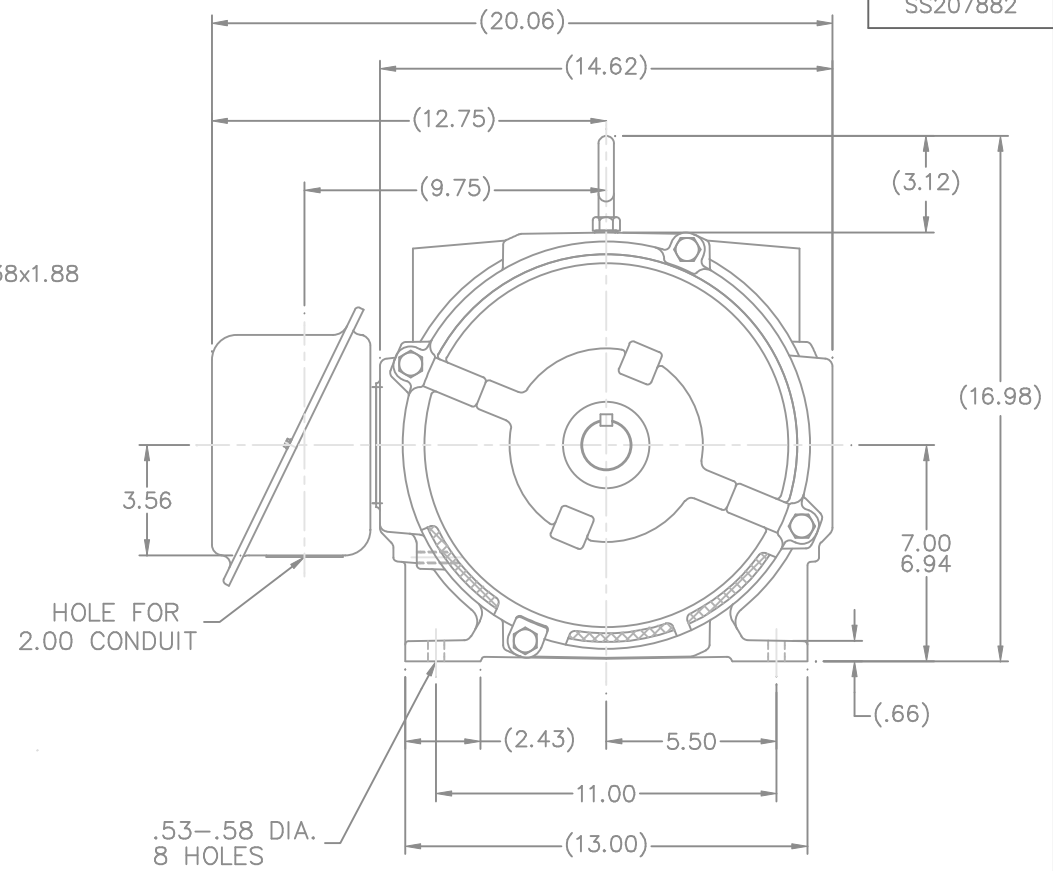


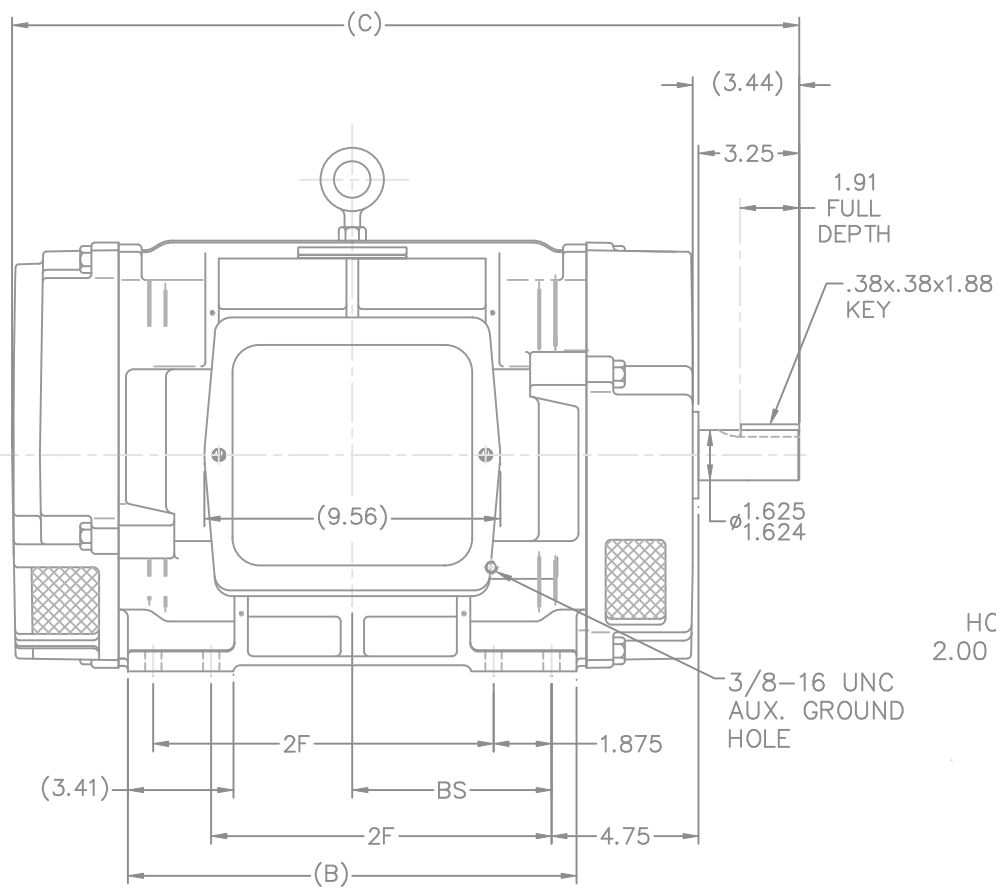

NOTES:

1. CONDUIT BOX CAN BE ROTATED IN 90. STEPS.
2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180..
3. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

DASH	FRAME	B	C	2F	BS		
1325	284TS	12.63	23.57	9.50	5.50		
1512	286TS	14.50	25.44	11.00	6.44		

			TOLERANCES UNLESS SPECIFIED		MARATHON ELECTRIC	DRAWN TJB 05-04-2004		
			DEC.	INCHES		CHK	ML	05-10-2004
			.X	±.1		APPD	BW	05-11-2004
			.XX	±.03		SCALE	1=4	
			.XXX	±.005		TITLE	OUTLINE	
			.XXX	±.0005		280 FR. - TS - DR.PR. - CAST IRON	REF	U-03030025
			.XXXX	±.0005		MAT'L	FMF	MU50708
NO.	REVISION	BY & DATE	CHK	ANG	±7'30"	FINISH	PREV	
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT			RFP	05-11-2004	CAD FILE	SS207882	SIZE	DRAWING NO. PAGE OF REV.
			DIST	LB			B	SS207882