

DUTY MASTER ALTERNATING CURRENT MOTORS

ENCLOSURE: TOTALLY ENCLOSED SQUIRREL-CAGE INDUCTION


COOLING: NON-VENTILATED

MOUNTING: FOOT

FRAMES 364T THRU 365TS

CAST IRON CONSTRUCTION

WITH VERTICAL LIFTING

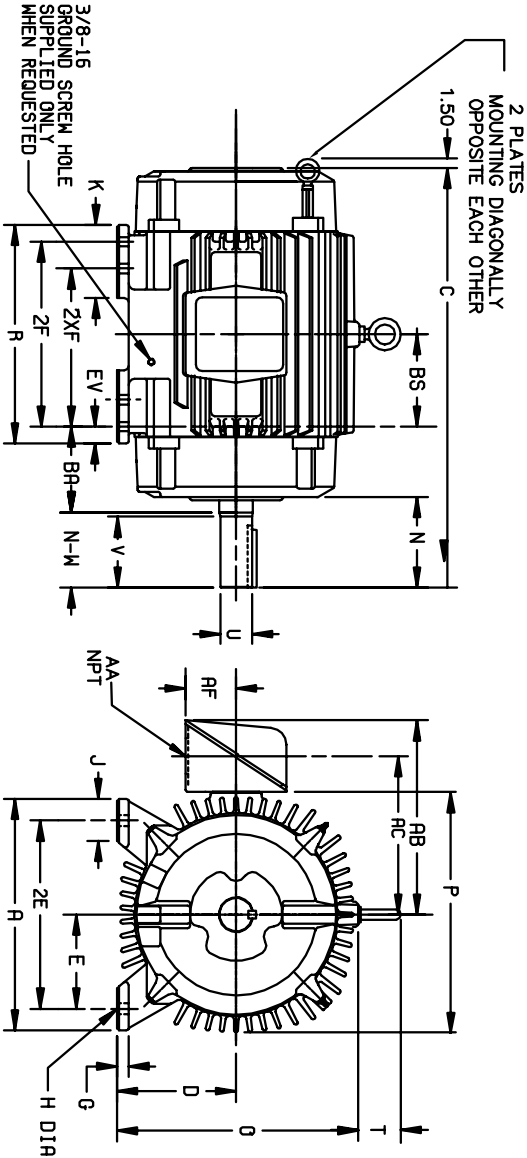

DIMENSIONS ARE IN INCHES

FRAME	A	D(2)	E	G	H	J	K	O	P	T	CAST IRON TERMINAL BOX			
											AA	AB	AC	AF
364T-365TS	17.00	9.00	7.00	.88	.69	2.75	3.88	18.50	19.00	2.94	2.50	18.00	13.81	4.12

FRAME SIZE	C	BS	B	2F	2XF	N	SHAFT AND KEY			SQ.	LGTH.	WEIGHT LBS. (G)
							N-W(6)	U(3)	V			
364T	29.70	6.12	15.00	---	11.25	6.25	5.88	2.375	5.62	.625	4.25	810
364TS	27.58	6.12	15.00	---	11.25	4.12	3.75	1.875	3.50	.500	2.00	805
365T	29.70	6.12	15.00	12.25	---	6.25	5.88	2.375	5.62	.625	4.25	835
365TS	27.58	6.12	15.00	12.25	---	4.12	3.75	1.875	3.50	.500	2.00	830

- (1) SPECIAL DIMENSIONS APPLYING TO THIS ORDER ON THIS LINE.
- (2) "D" VARIES — +.00, -.06.
- (3) "U" VARIES — +.000, -.001.
- (4) ALL FRAMES HAVE EIGHT MOUNTING HOLES FOR DUAL MOUNTING.
- (5) MOTOR WEIGHTS MAY VARY BY 15% DEPENDING UPON RATING.
- (6) "N-W" VARIES +.00, -.25.
- (7) OPTIONAL AUXILIARY CONDUIT BOX SUPPLIED ONLY WHEN SPECIFIED.

CONDUIT BOX LOCATED ON OPPOSITE SIDE WHEN F-2-W-1, W-4-W-5-W-7, OR C-1 MOUNTING IS SPECIFIED.
IF MOUNTING CLEARANCE DETAILS ARE REQUIRED, CONSULT FACTORY.
MAXIMUM PERMISSIBLE SHAFT RUNOUT WHEN MEASURED .003 T.I.R. 1.625 DIA.

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: CHG CBOX "AA" DIMENSION TO 2-1/2"	VERSION: 01	TDR: 000000717435
REV. LTR: A	REVISED: 08:52:24 10/19/2011	BY: RAGGDM
FILE: \RAG\00008\959		
MTL: -		

BALDOR

DIM SHT TENV XT FT 360T WITH VERTICAL LIFTING

FRAME- TYPE- CERTIFIED FOR-
ORDER- ITEM- HP- RPM- PH- HZ VOLTS-
SALES ORDER- APPROVED BY- DATE