
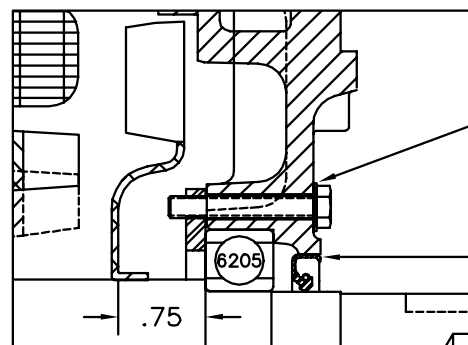
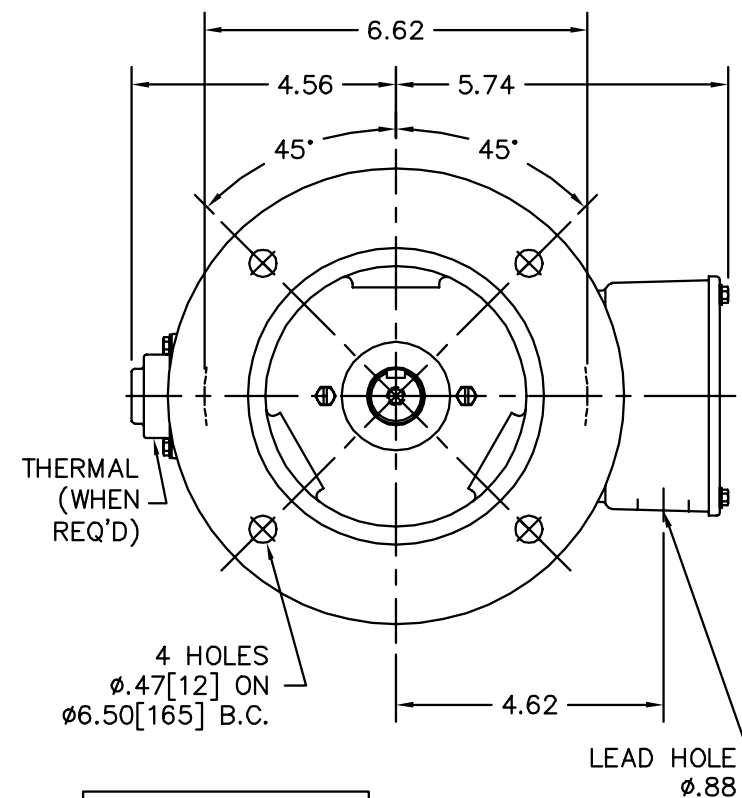


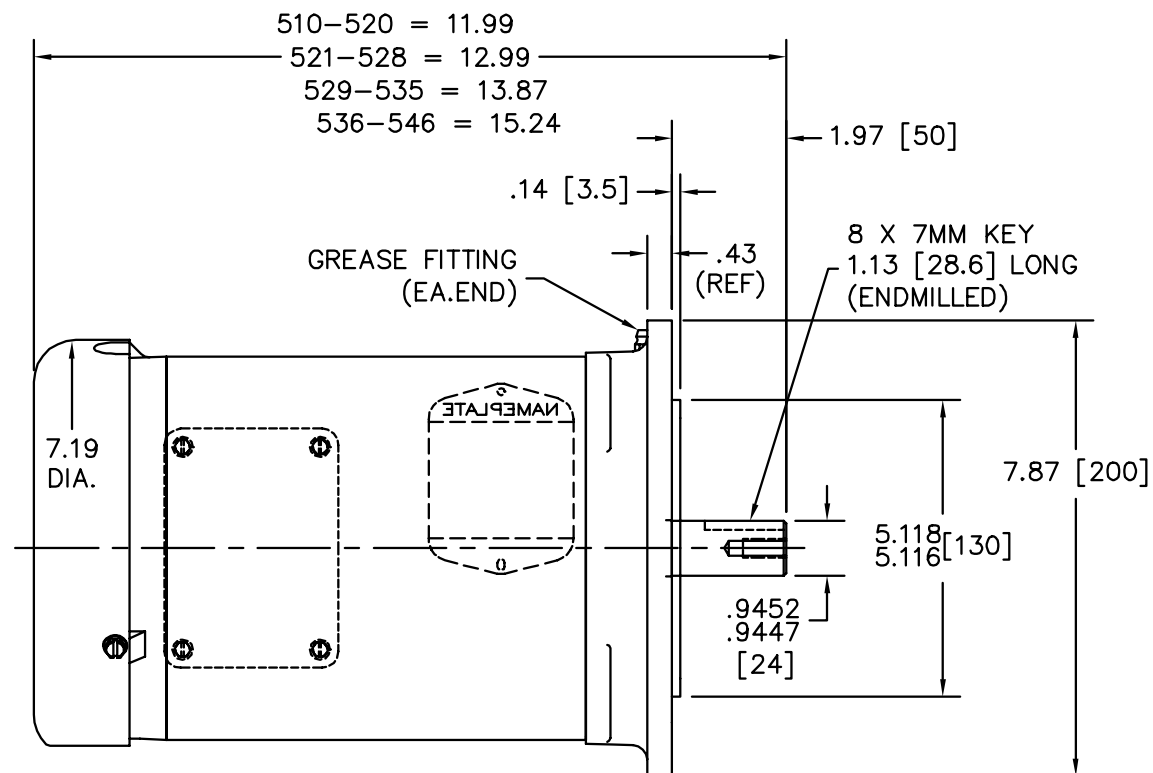


PULLEY END DETAIL

OMIT LOCKWASHER & COAT
UNDER SCREW HEAD WITH
SEALER BEFORE INSTALLING.

APPLY COAT OF SEALER
TO HOUSING BEFORE PRESSING
IN SEAL. SEAL MUST BE
PRESSED W/LIP OUT.

M8 x 1.25 TAP
.75 [19] DEEP



KEYWAY DETAIL

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: REMOVE RED FROM PULLEY END DESCRIPTION

REV. LTR: G

VERSION: 03

TDR: 000000877506

FILE: \AAA\00050\737

REVISED: 02:40:36 10/24/2014

BY: ENFRAJO

MTL: -

BALDOR

VER D90SD, LD TEFC M F2 W/SEAL, SHORT STYLE PUEP

SH 1 of 1