
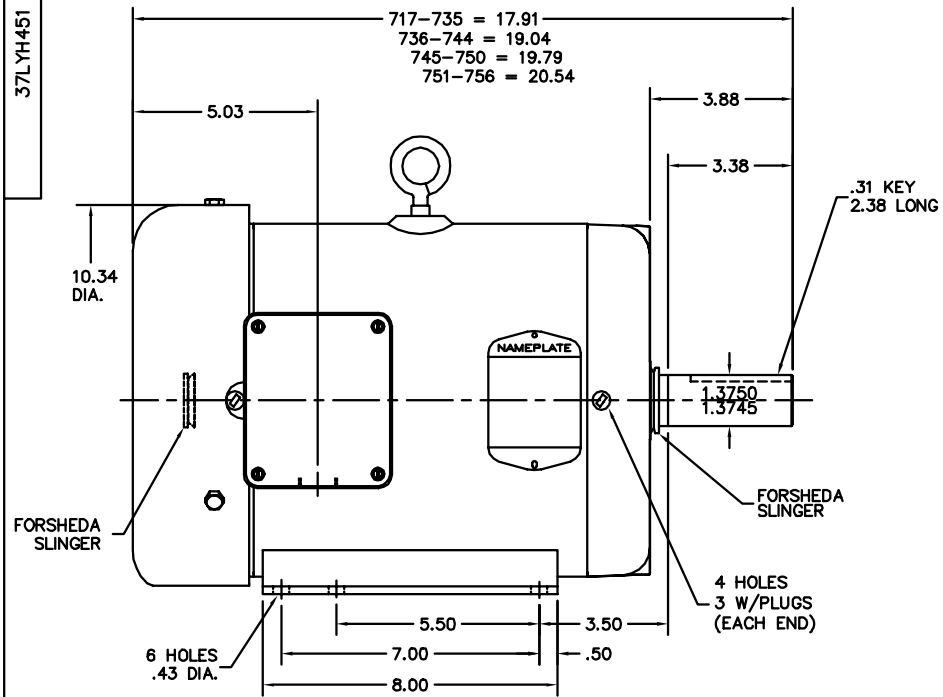


APPLY COAT OF
RED SEALER TO
HOUSING BEFORE
PRESSING SEAL IN.

PULLEY END DETAIL

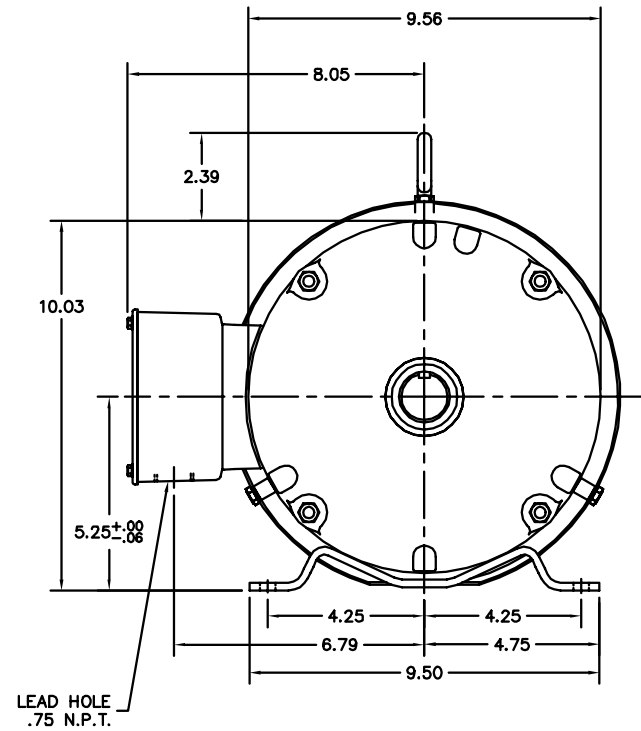

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: REPLACE HA1005A02 WITH HW4600B74	VERSION: 03	TDR: 000000783785
REV. LTR: C	REvised: 02:49:21 05/03/2013	BY: ENCARJO
FILE: \AAA\00075\515		
MTL: -		

BALDOR

STD HORZ 213-5T TEFC 37M WD (S/P#9) W/EPACT SHOVE

SH 1 of 1