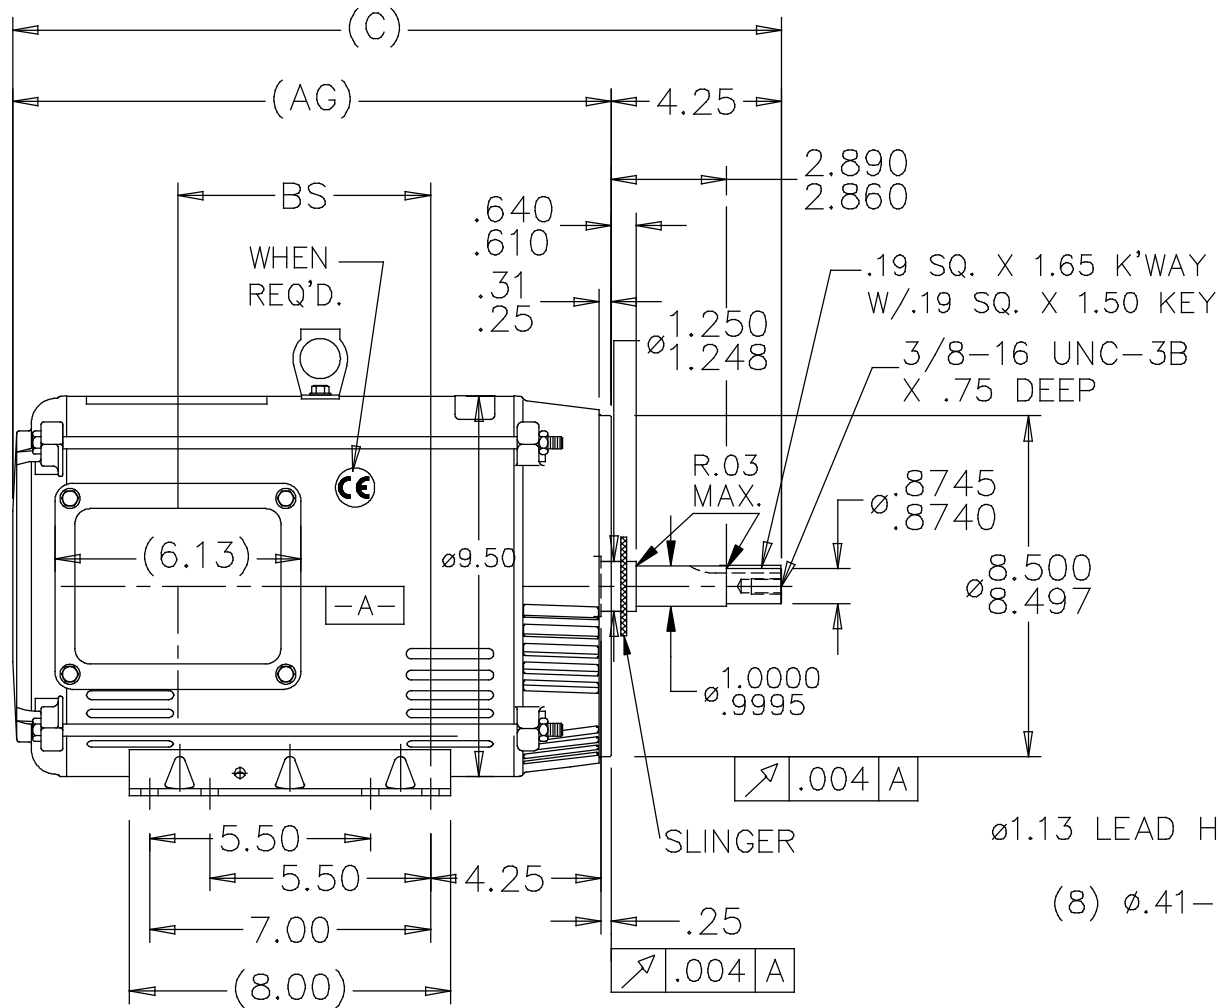


ø1.13 LEAD HOLE

(8) ø.41-.46

NOTES:

1. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.
2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180. (EXCEPT AS NOTED)

DASH	FRAME	C	AG	BS
1115	213/15JM	19.16	14.91	6.30

NO.	REVISION	BY & DATE	CHK	ANG	TOLERANCES UNLESS SPECIFIED	
					DEC.	INCHES
					.X	±.1
					.XX	±.03
02	ADDED .19 SQ. X 1.50 KEY ISAAC 11-4853	GWS 10/11/11			.XXX	±.005
01	ø.8745/.8740 WAS ø.8750/.8745 ECN #21254	WGJ 8/3/2011	EMH	.XXXX	±.0005	
					±1/2"	

ELECTRIC MOTORS
GEARMOTORS
AND DRIVES

TITLE	OUTLINE
210JM FR. - BB - TS - DR.PR. - C FACE	
MAT'L.	
FINISH	

DRAWN	PN 12/13/2010
CHK	SR 12/13/2010
APPD	
SCALE	1=5
REF	SS88643LE
FMF	
PREV	

THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED
THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT

RFP

DIST LB

CAD FILE SS89824LE

SIZE A DRAWING NO. PAGE 1 OF 1 REV.

SS89824LE 02