



REV.	DESCRIPTION	DATE	APPROVED
11	REDRAWN NO CHANGE TI96-22390	07/10/96	MDP
12	CHG TO RBC FORMAT PER IS05-1777	12/16/05	PRAVEEN.K



VIEW SHOWING
PE VENTILATION
OPENINGS


"TOP" STICKER—
(WHEN SPECIFIED)

GREASE—
FITTINGS
(WHEN SPEC)

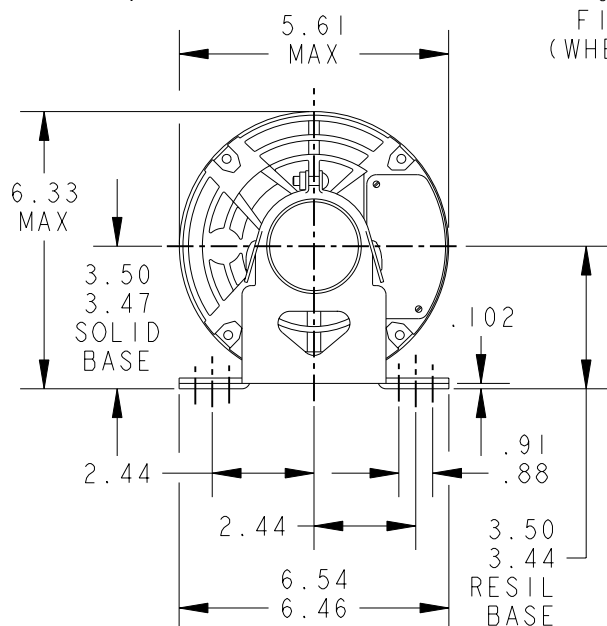

.500-14-
CONDUIT
THREAD

KEYWAY FOR -
 .188 X .188
 X (K) LG. KEY

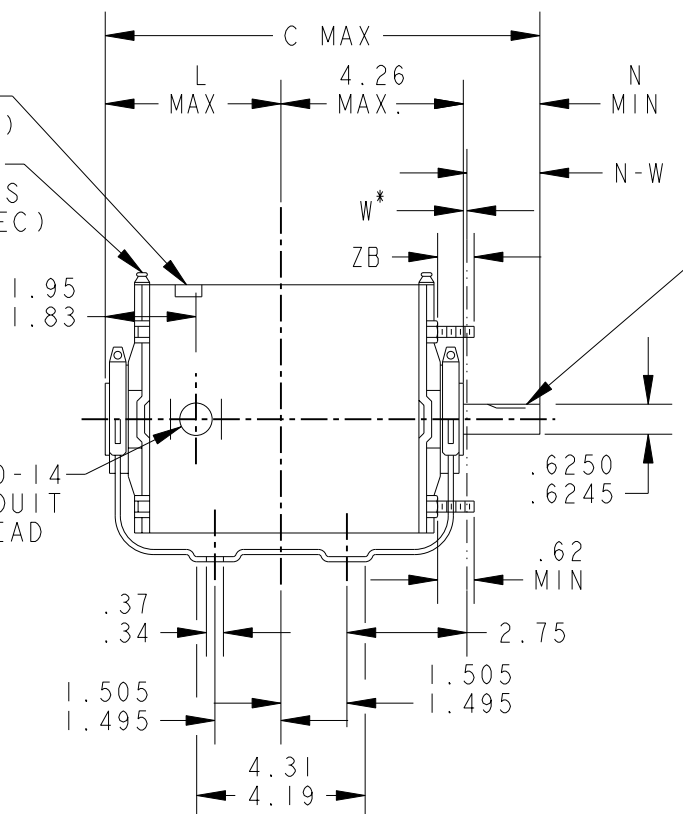

*W IS A CLEARANCE DUE TO VARIATION IN PARTS & ASSEMBLY.

5	KH	35	56	9.89	1.38	3.80	1.88	2.01/1.79	.55/.52	
4	KH	39	56	11.85	1.38	5.76	1.88	2.01/1.79	.55/.52	7.75 SHL
3	KH	37	56	10.72	1.38	4.63	1.88	2.01/1.79	.55/.52	
2	KH	38	56	11.32	1.38	5.23	1.88	2.01/1.79	.55/.52	
1	KH	36	56	10.32	1.38	4.23	1.88	2.01/1.79	.55/.52	
PT	TYPE	GE SIZE	NEMA FR	C	K	L	N	N-W	ZB	

	SIGNATURES		DATE		 REGAL-BELOIT CORPORATION	
	MODEL	JPK	01/19/76			
	DETAIL	.	.			
	CHECKED	.	.			
	ENGRG	.	.			
	MFG	.	.			
FOR ADDITIONAL INFO REFER TO:			TITLE OUTLINE FORM N-GENERAL PURPOSE MOTOR-DRIP PROOF-SOLID OR RESIL BASE-BALL OR SLEEVE BEARING			
APPLIED PRACTICES	.	.				
DIMENSIONS ARE IN INCHES	✓	.				
MATERIAL			SIZE	DRAWING	REV	
			A	52A101910	12	
SOLID MODEL: 52A101910			SCALE: 1.000		REF. No: .	
					SHEET 1 of 1	