


RPMAC VARIABLE SPEED ALTERNATING CURRENT MOTOR
RL & URL2570Z

ENCLOSURE: DRIPPROOF
MOUNTING: FOOT
DRIVE METHOD: COUPLED OR BELTED

COOLING: FORCE VENTILATED
ACCESSORIES: PROVISIONS FOR
TACHOMETER MOUNTING
ONLY WHEN SPECIFIED

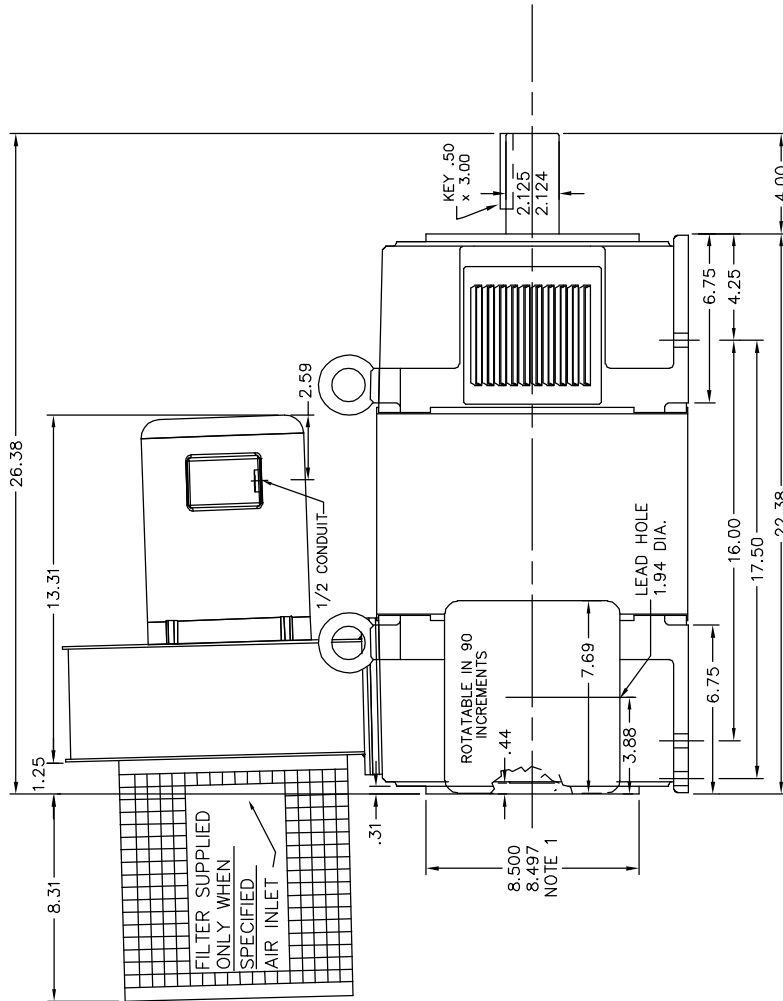

NOTE 1 TACHOMETER MOUNTING
1/2-13 TAP, .88 DEEP, ON A 7.25 DIA. BOLT CIRCLE
FACE RUNOUT AND ECCENTRICITY .004 MAX. T.I.R.
NOTE 2 SHAFT HEIGHT WILL NOT BE EXCEEDED.
SHIMS UP TO .03 INCHES IN THICKNESS ARE USUALLY
REQUIRED FOR COUPLED OR GEARED MACHINES.
TERMINAL BOX MAY BE LOCATED F1 OR F2 IF SPECIFIED
121 AMP STEEL TERMINAL BOX SHOWN
REFER TO 616779-50 FOR SPECIFIC TERMINAL BOX DIMENSIONS

MOTOR WEIGHT 480 LBS. (MAY VARY 15%)
BLOWER ASSEMBLY CAN BE LOCATED TOP or SIDES.
BLOWER & TERMINAL BOX MAY NOT BE LOCATED ON SAME SIDE.

DIMENSIONS ARE IN INCHES SCALE 1:1

REFER TO 616779-51 FOR SPECIFIC TACHOMETER DIMENSIONS

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. LTR: A	VERSION: 01	TDR: 000000771082
FILE: \R66\00003\278	REVISED: 09:27:34 11/28/2012	BY: R66JGG
MPL: -		

BALDOR

DIM SHT RPMAC DPFV RL & URL2570Z PROV FOR TACH

SH 1 of 1