


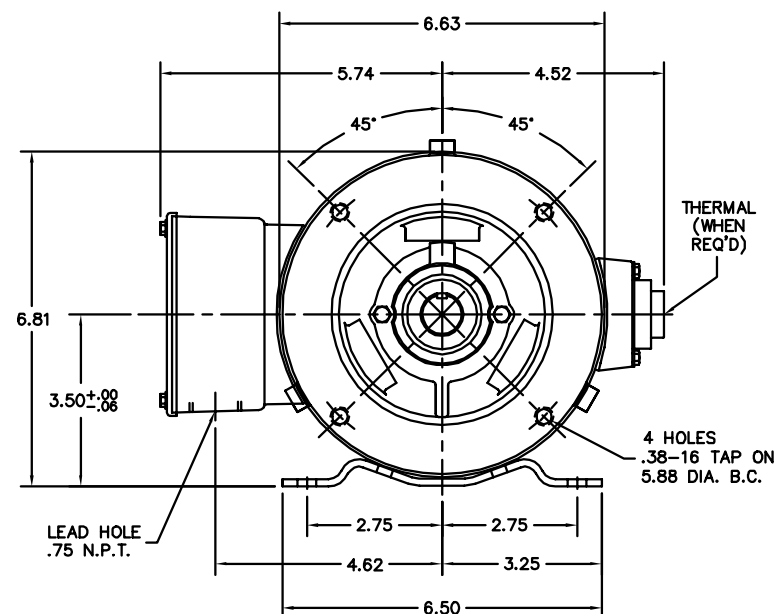


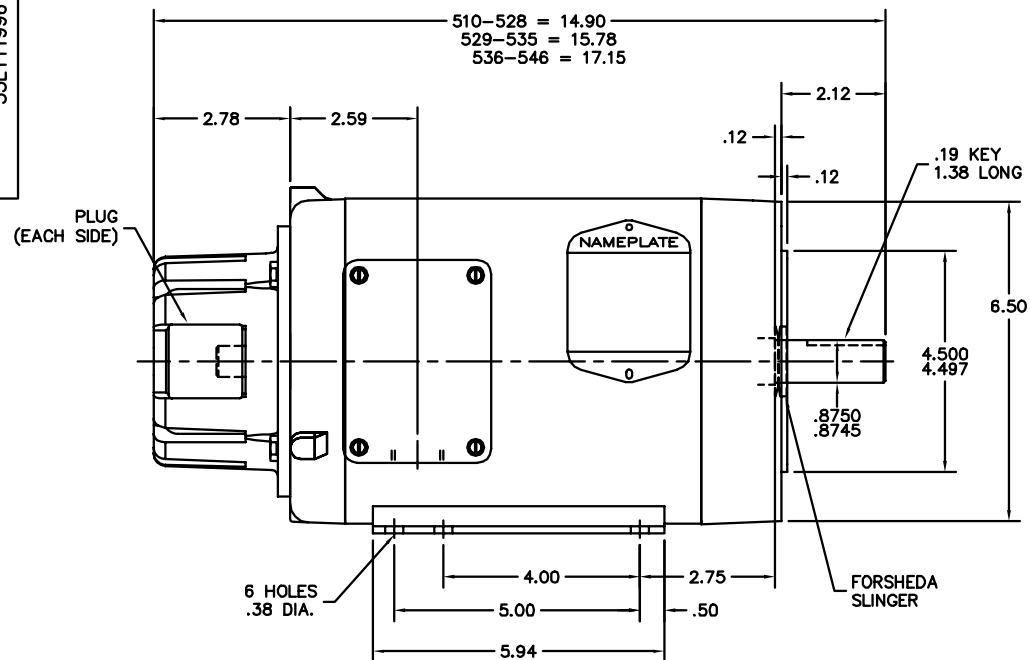

APPLY COAT OF
RED SEALER TO
HOUSING BEFORE
PRESSING SEAL IN



FRONT END DETAIL



PULLEY END DETAIL

OMIT LOCK-WASHERS &
COAT ENTIRE SCREW
HEAD W/RED SEALER
BEFORE INSTALLING

APPLY COAT OF
RED SEALER TO
HOUSING BEFORE
PRESSING SEAL IN

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: CHG .06 DIA TO SHOW FROM ENDPLATE. SEE TDR ATTCHMT

REV. LTR: A

VERSION: 01

TDR: 000000774298

FILE: \AAA\00168\402

REVISED: 08:58:30 11/16/2012

BY: ENCARJO

MTL: -

BALDOR

HOR 143-5TC TENV 35M WD INV (THRU-SH ENC W/ COVER) 2 POLE

SH 1 of 1