


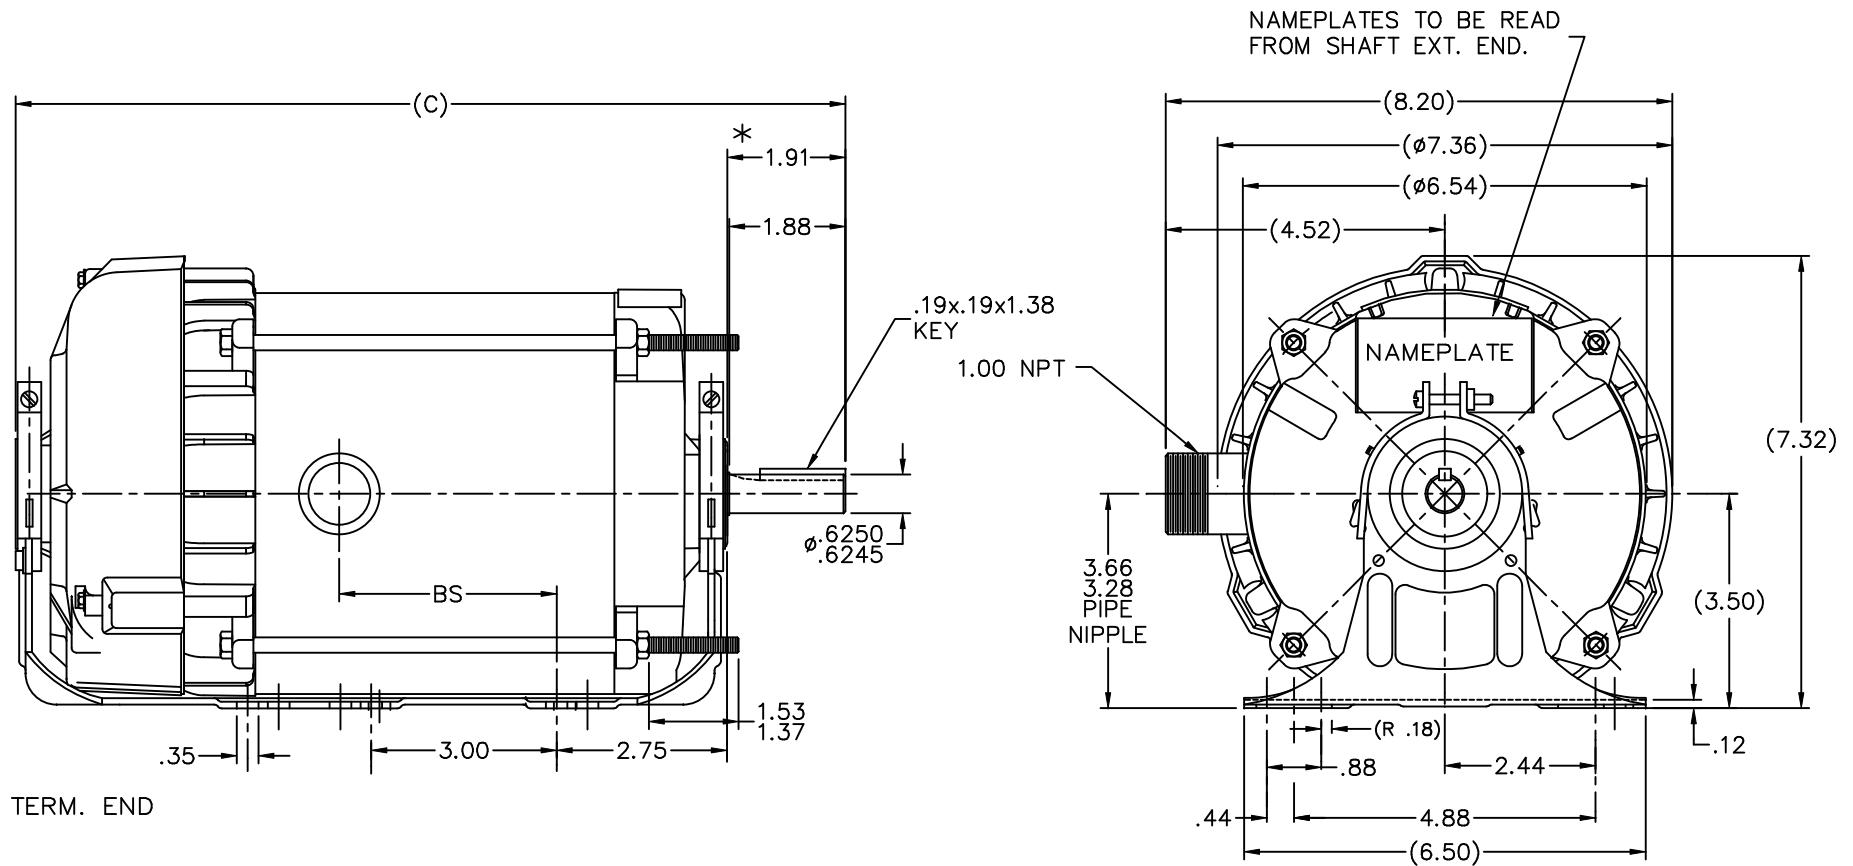

NOTE:

1. MOTOR MUST BE ROTATED TO .75" STRIP SOCKET CLEARANCE FOR GROUND SCREW, MAXIMUM (10 DEGREES).

* DIM IS FROM RESIL RING
END CAP TO END OF SHAFT

DASH	(C)	BS			
631	13.96	4.15			
681	14.46	4.65			
731	14.96	5.15			
781	15.46	5.65			
831	15.96	6.15			
881	16.46	6.65			
931	16.96	7.15			
981	17.46	7.65			

4		REVISED STUD BOLT EXT. FROM 1.45" TO 1.53/1.37	NJS 11-05-2002	ML	TOLERANCES UNLESS SPECIFIED	MARATHON ELECTRIC	DRAWN MH 12-05-1996	
		CN 24300-473			DEC. INCHES		CHK	ML 12-06-1996
3		REVISED STUD BOLT EXT. FROM 1.54/1.74 TO 1.45"	NJS 11-14-2001		.X ±.1	TITLE OUTLINE 56 FR. - EXP.PR. - TEFC - 1Ø & 3Ø	APPD GK 12-06-1996	
		CN 29400-662			.XX ±.03		SCALE 1=2	
2		ADDED NOTE	PGK 06-09-1997		.XXX ±.005	FINISH	REF	
1		NEW DRAWING	MH 12-06-1996		.XXX ±.0005		FMF	
NO.		REVISION	BY & DATE	CHK	ANG ±7°30"	CAD FILE 104200	PREV	
		THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK. ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED. THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT			RFP		SIZE	DRAWING NO. PAGE OF REV.
					DIST WP		B	104200 4

ERROR: undefined
OFFENDING COMMAND: curre

STACK:

-dictionary-
/Pscript_WinNT_Compat
-dictionary-