



A Regal Brand

Catalog # : LM21385

Product Type: AC MOTOR

Description: 5.0,1200,TEFC,254U,3/60/460

Model: CCF6P5U64

Stock: Stock

Quote: Price:

Date: 10/21/2014



A Regal Brand

Catalog # : LM21385

Product Type: AC MOTOR

Description: 5.0,1200,TEFC,254U,3/60/460



Model: CCF6P5U64

Stock: Stock

Engineering Data					
Volts	460	Volts		Volts	
F.L. Amps	6.7	F.L. Amps		F.L. Amps	
S. F Amps		S. F Amps		S. F Amps	
RPM	1200	Hertz	60		
HP	5	Duty	CONTINUOUS	TYPE	TFS
KW	3.73				
Frame	254U	Serv. Factor	1.0	Phase	3
Max Amb	65	Design	B	Code	H
Insul Class	F	Protection	NOT	Therm.Prot.	
Eff 100%	90.2	Eff 75%		PF	76
UL	V-INS, CONST UL REC	CSA	Yes	Bearing OPE	210
CC Number	CC004A	CE	Yes	Bearing PE	309
Load Type		Inverter Type		Speed Range	NONE
Motor Wt.	260 LB	Enclosure	TEFC	Lubrication	STANDARD
Nameplate		Mounting	RIGID	Rotation	REV
Assembly		Shaft Dia.		Ext. Diag.	A-EE7300-LN
Cust Part No		Outline	B-SS203362LN-1050	Ext. Diag2	
Packaging	B	Outline Dash No		Winding	254671
Carton Label				GROUP :	1
Iris		Paint	LINCOLN GRAY	Test Card	
Form Factor		RMS Amps		Const Torque	Speed Range
Torque		Peak			
AB Code		Peak@DegC			
Resistance					
Connection					
Rework Status		Rework TYPE			

Hazardous Loc		NONE		Temp Op Code		Brake Motors			
Explosion Proof						FORCE			
Class				GROUP		VDC			
Class				GROUP		ADC		Brake Coil OHMs @25 C	
Performance									
Torque UOM						Inertia (WK²)			
Torque									
CURRENT (amps)									
Efficiency (%)									
PowerFactor									
Load Curve Data @60 HzVolts,5Horsepower									
Load	Amps	KW	RPM	Torque	Eff	PF	Rise By Resis	Frame Rise	
0.0	3.5	0.25	1200	0.0	0.0	7.0	0.0	-	
0.25	3.8	1.2	1195	5.5	81.5	37.0	0.0	-	
0.5	4.5	2.2	1188	11.0	88.5	57.0	0.0	-	
0.75	5.5	3.2	1182	16.8	90.2	70.0	0.0	-	
1.0	6.7	4.2	1175	22.4	90.2	76.0	35.0	-	
1.15	7.6	4.8	1172	25.8	90.2	78.0	45.0	-	
1.25	8.1	5.2	1168	28.0	89.5	80.0	55.0	-	
Load Curve Data @60HzVolts,5Horsepower								SOURCE: CALCULATED GROUP: 1	
Load	Amps	KW	RPM	Torque	Eff	PF	Rise By Resis	Frame Rise	
Load Curve Data Not Available									
Quote:		Price:							
Date: 10/21/2014									

B-SS203362LN

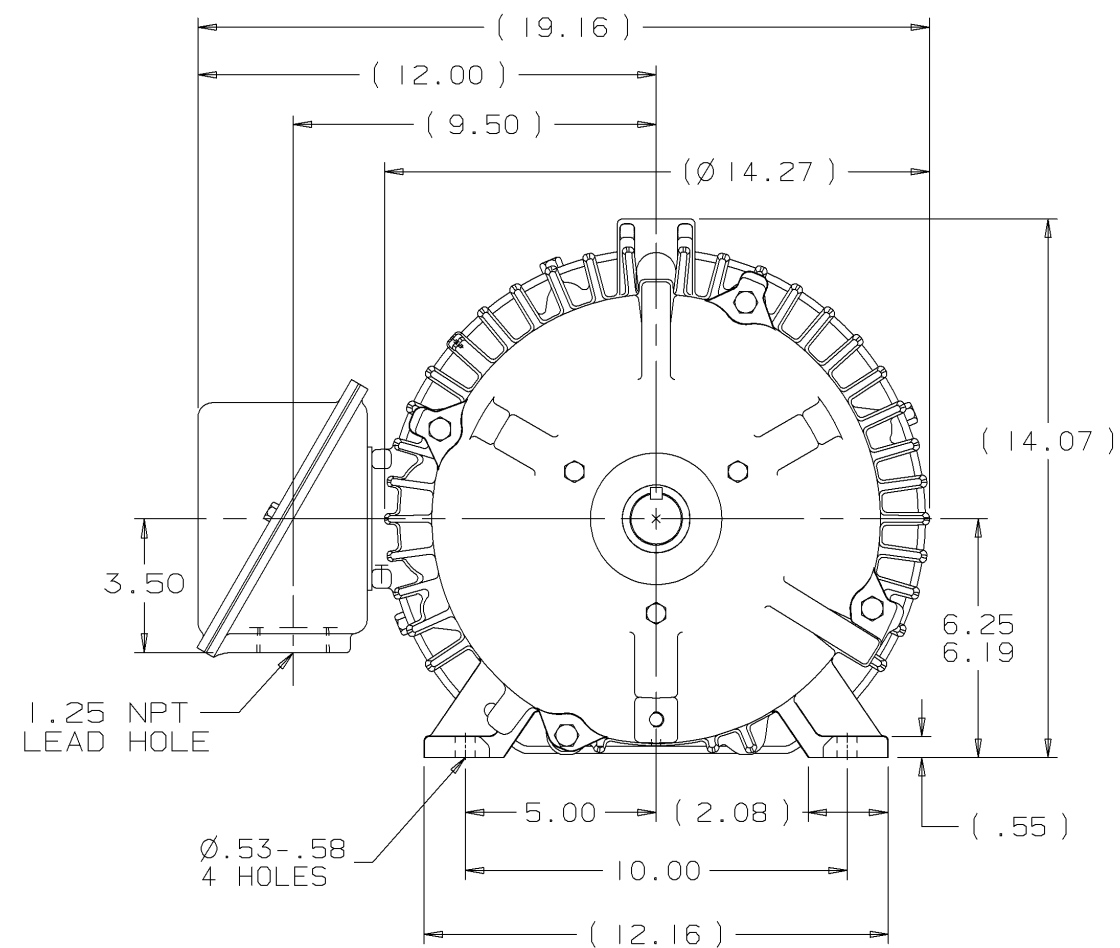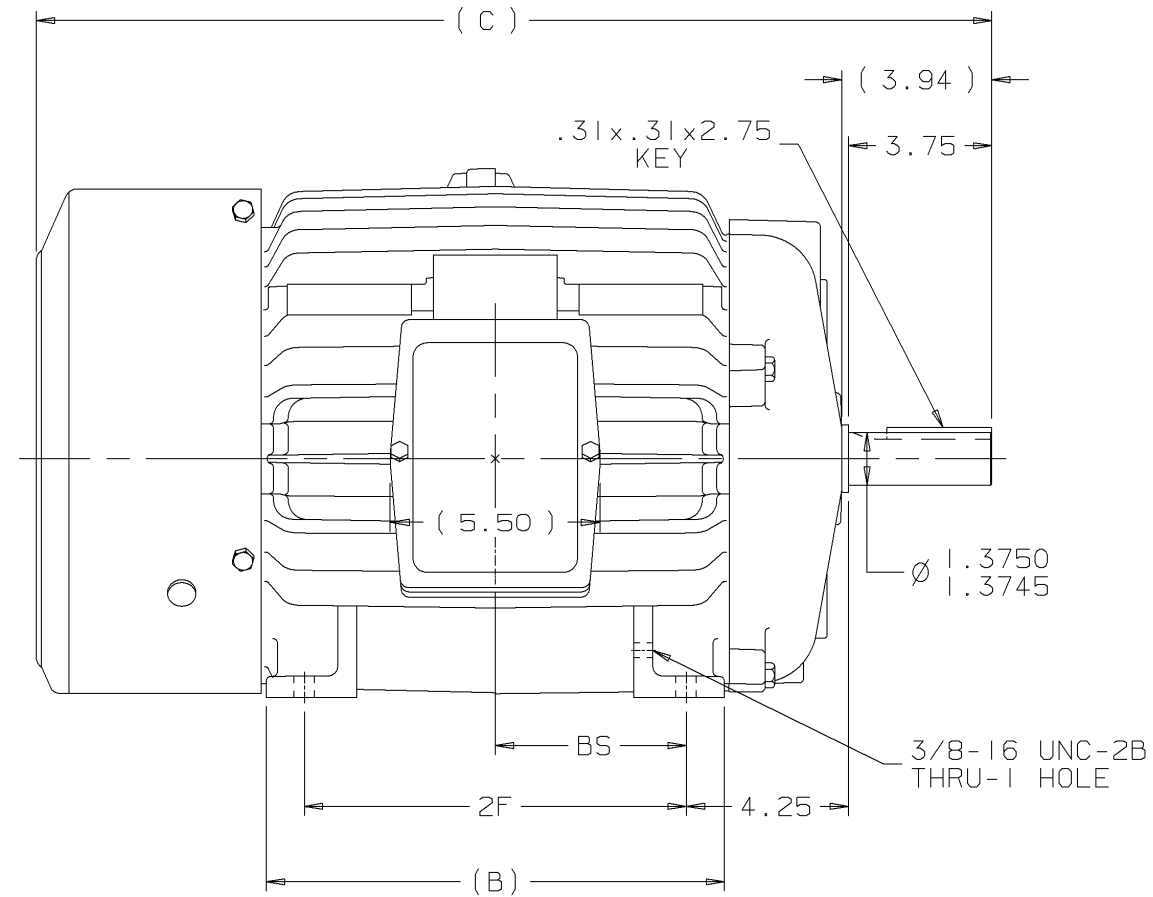

NOTES:


1. CONDUIT BOX CAN BE ROTATED ON ITS AXIS.
2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.
3. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR

DASH	FRAME	B	C	2F	BS						✓ UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOL. ON XX± .03 XXX± .005 XXXX± .0005 ANGLES± 7°30"	MAX. SURFACE ROUGHNESS UNLESS OTHERWISE NOTED		DRAWN BY DRS	03-13-2000					
I 050	254U	10.25	23.27	8.25	4.12	2	08-09-2000	REVISED OUTLINE TO HAVE C'BOX FROM: SS203002LN	CN 29200-711							MSG	FINISH		CHKD BY BLR	03-13-2000
I 225	256U	12.00	25.02	10.00	5.00															
						I	03-13-2000	NEW DRAWING	MU2968 I							DRS	MATERIAL		APPD BY TB	03-13-2000
						REV	DATE	CHANGE								NAME	PART NAME OUTLINE - TEFC 250U FRAME - BB - TS - STD.			DRWG NO B- SS203362LN
											L	PURCHASED	CADD FILE NO.	SS203362LN						

THREE PHASE – SINGLE VOLTAGE
MOTOR – CONDUIT BOX @ 'A'

EE7300-LN

TO REVERSE ROTATION:
INTERCHANGE ANY TWO LINE
LEAD CONNECTIONS

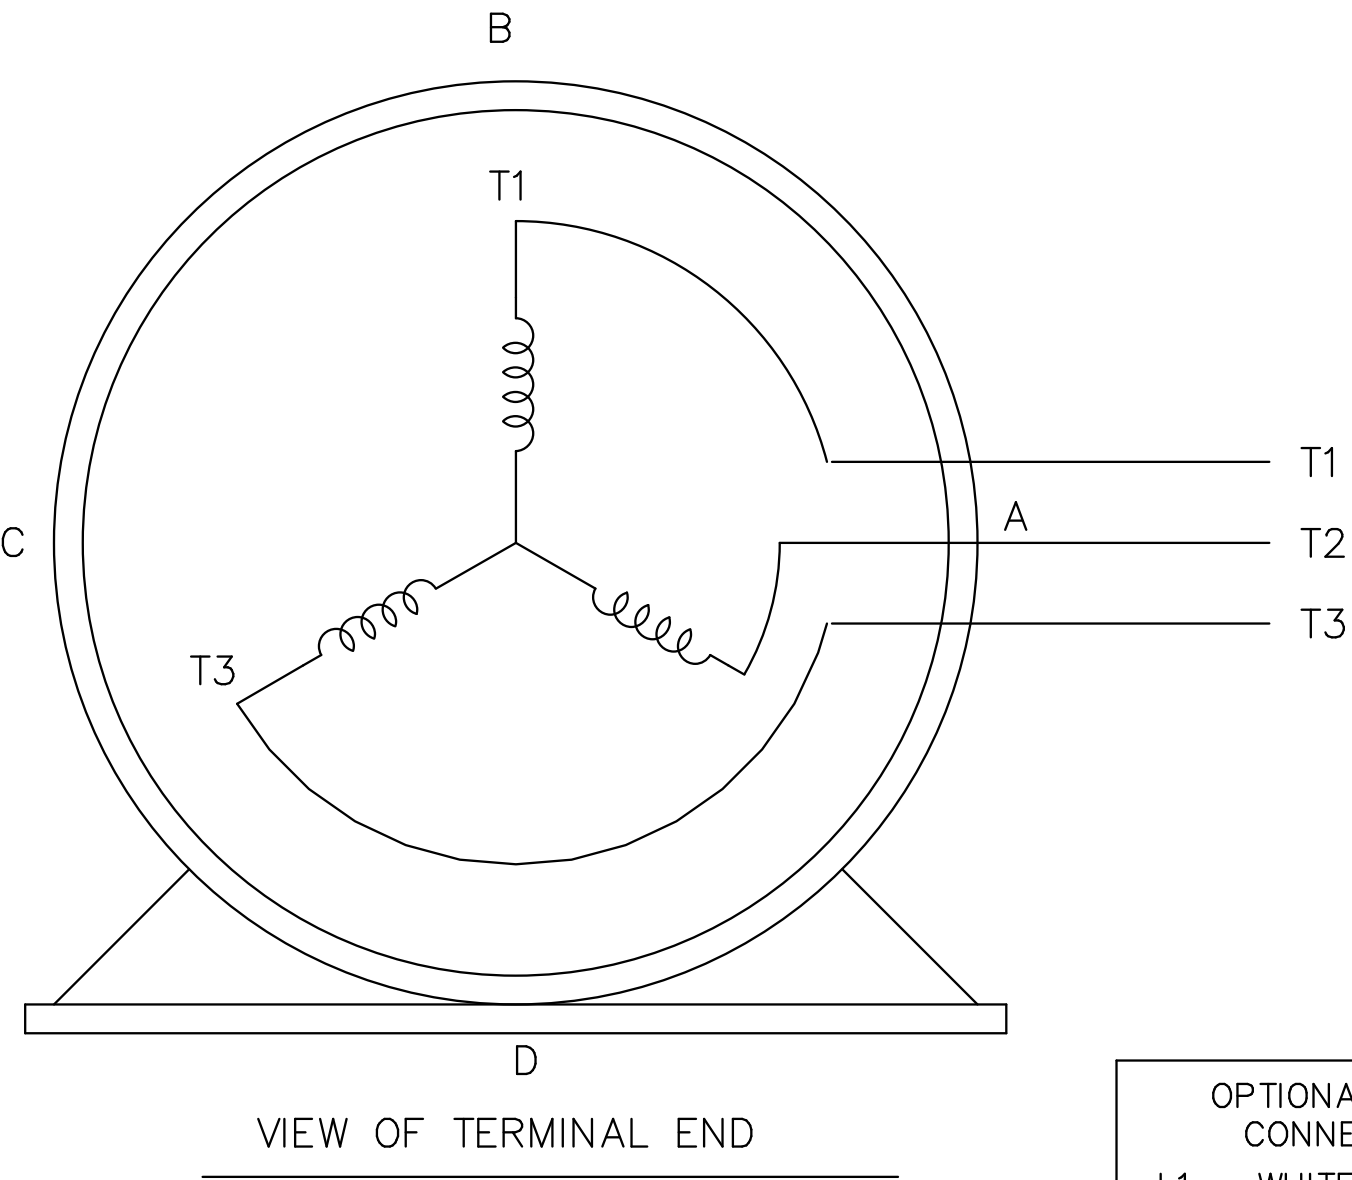

IF MOTOR HAS
6 LEADS

T1 L1

T1

T2 L2

T2

T3 L3

T3

A-9806 DECAL

OPTIONAL CORD
CONNECTION

L1 WHITE

L2 RED

L3 BLACK

				TOLERANCES UNLESS SPECIFIED			DRAWN BLR 08-13-1999			
				DEC.	INCHES		CHK	ML	08-13-1999	
				.X	±.1		APPD	GK	08-13-1999	
				.XX	±.02		SCALE 1=1			
2	ADDED OPTIONAL CORD CONNECTION PER MU47226	CTO 03-31-2004	PJB	.XXX	±.005	TITLE CONNECTION DIAGRAM SINGLE VOLT – 3Ø MOTOR			REF	
1	NEW DRAWING	CTO 08-13-1999		.XXXX	±.0005	MAT'L.			FMF	
NO.	REVISION	BY & DATE	CHK	ANG	±7'30"	FINISH			PREV	
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT – DO NOT SCALE THIS PRINT			RFP		CAD FILE EE7300_LN		SIZE	DRAWING NO.	PAGE OF	REV.
			DIST WP				A	EE7300-LN		2