


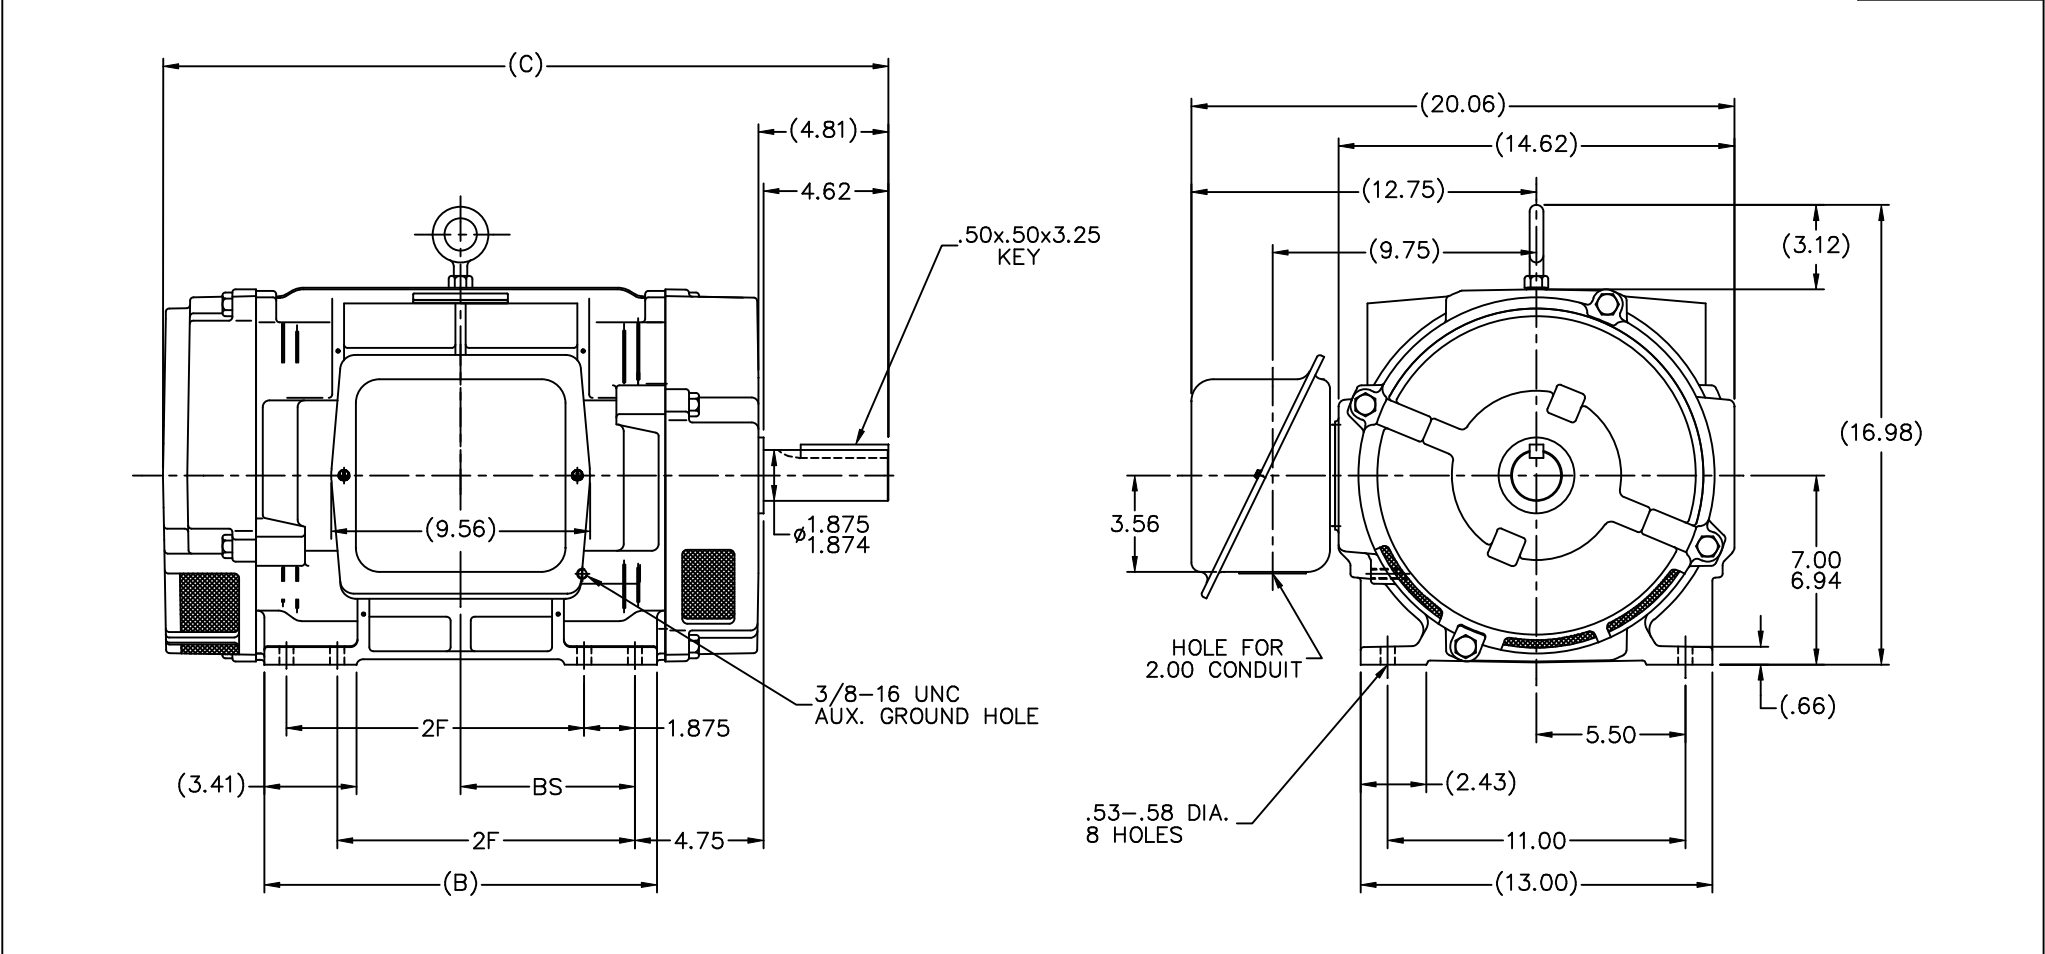

NOTES:
1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.

2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.
3. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

DASH	FRAME	B	C	2F	BS		
1325	284T	12.63	24.94	9.50	5.50		32-17-1000
1512	286T	14.50	26.81	11.00	6.44		

					TOLERANCES UNLESS SPECIFIED			DRAWN B/W 3/20/2000			
					DEC.	INCHES		CHK ML 3/21/2000			
					.X	±.1		APPD TB 3/21/2000			
				.XX	±.03	TITLE OUTLINE 280 FR. — TS — DR.PR. — CAST IRON		SCALE 7=32			
2	ADDED SCREENS TO BRACKETS	MU80368	TJW 6/26/2007	MSG.XXX	±.005			REF			
1	NEW DRAWING		BJW 3/21/2000	.XXXX	±.0005	MAT'L	FIMF				
NO.	REVISION		BY & DATE	CHK ANG	±7°30"	FINISH	PREV				
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK. ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED. THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - NO NOT SCALE THIS PLOT!						RFP	CAD FILE SS207470L.N	SIZE B	DRAWING NO. SS207470L.N	PAGE 1 OF 1	REV. 2

ERROR: syntaxerror
OFFENDING COMMAND: --nostringval--

STACK:

/p2e
-savelevel-