


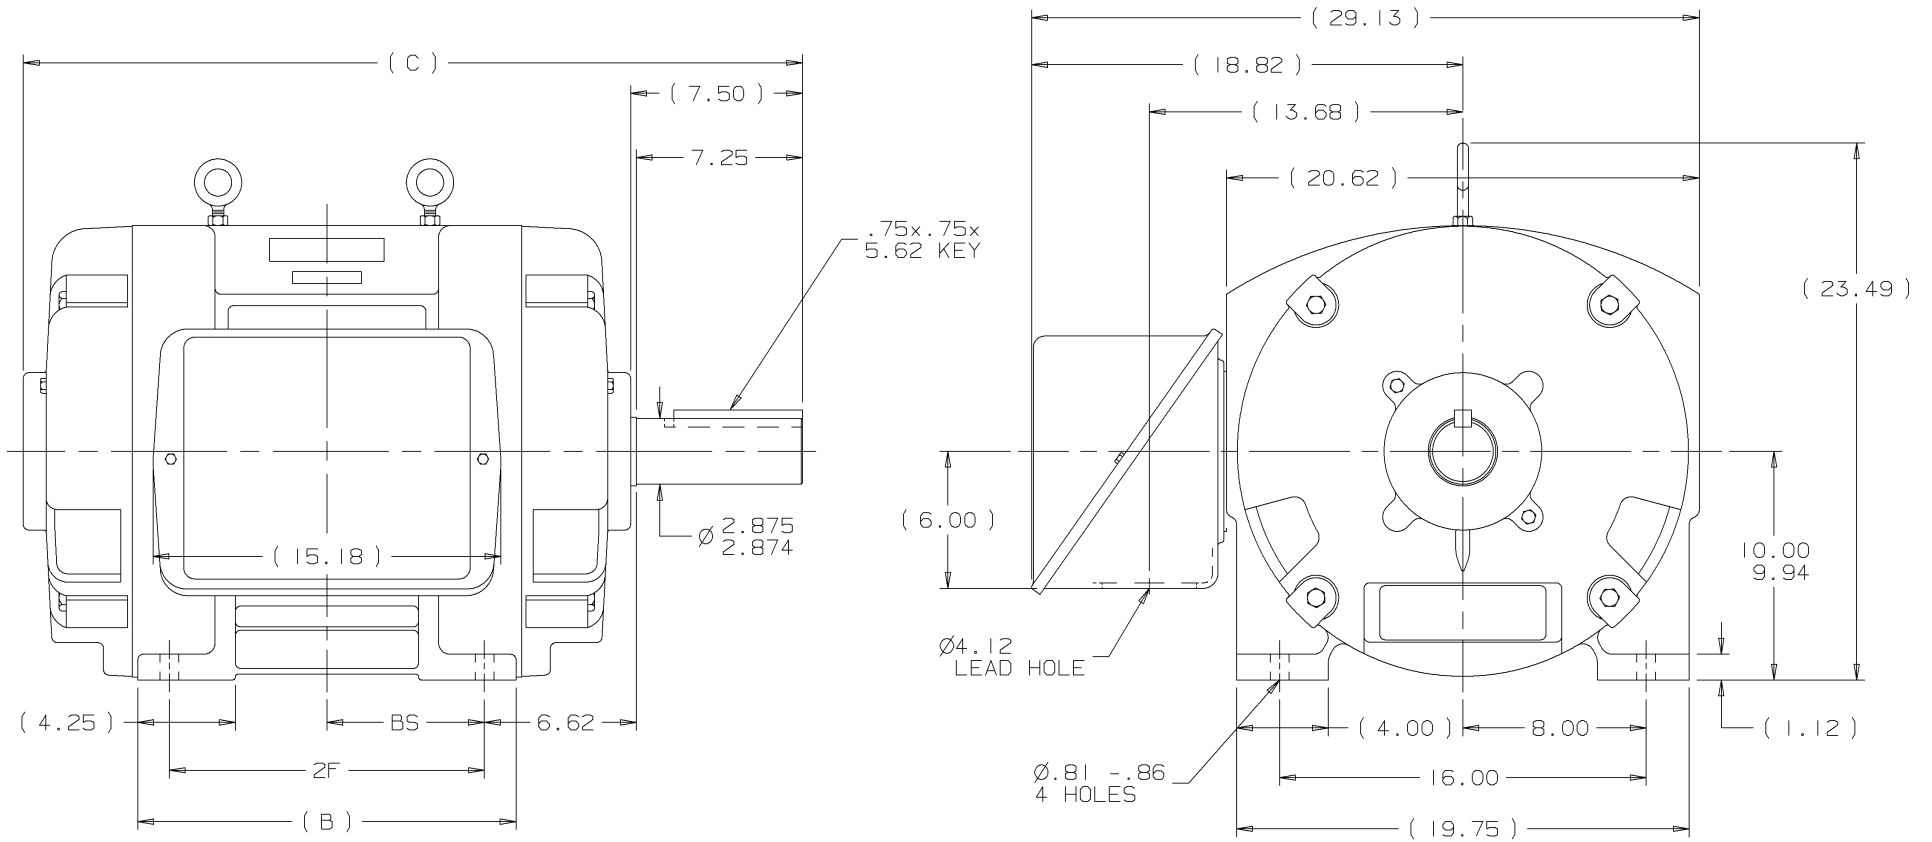

NOTES:

1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.
2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.
3. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

S. NAME TYPE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.												TOLERANCES UNLESS SPECIFIED				DRAWN KL 12-20-2001	
												DEC.		TOLERANCE		CHK DJK 12-20-2001	
												.X		± .1		APPD JES 12-20-2001	
												.XX		± .03		TITLE OUTLINE	
												.XXX		± .005		400T FR. - DR.PR. - STD.	
												.XXX		± .0005		MAT'L.	
												.XXX		± .0005		PREV	
DASH	FRAME	B	C	2F	BS	NO. REVISION						BY DATE		CHK ANG ± 7'30"		FINISH	
1550	404T	15.00	32.50	12.25	6.12	1 NEW DRAWING MU40009						KL 12-20-2001					
1700	405T	16.50	34.00	13.75	6.88	THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USE EXCEPT IN CONNECTION WITH OUR WORK. ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED. THIS IS AND ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT								PURCHASED		CAD FILE SS509599LN.GEN	
														DIST WA - CA - OR - TX - AR - OK		SIZE B	
																DRAWING NO. SS509599LN	
																REV.	