
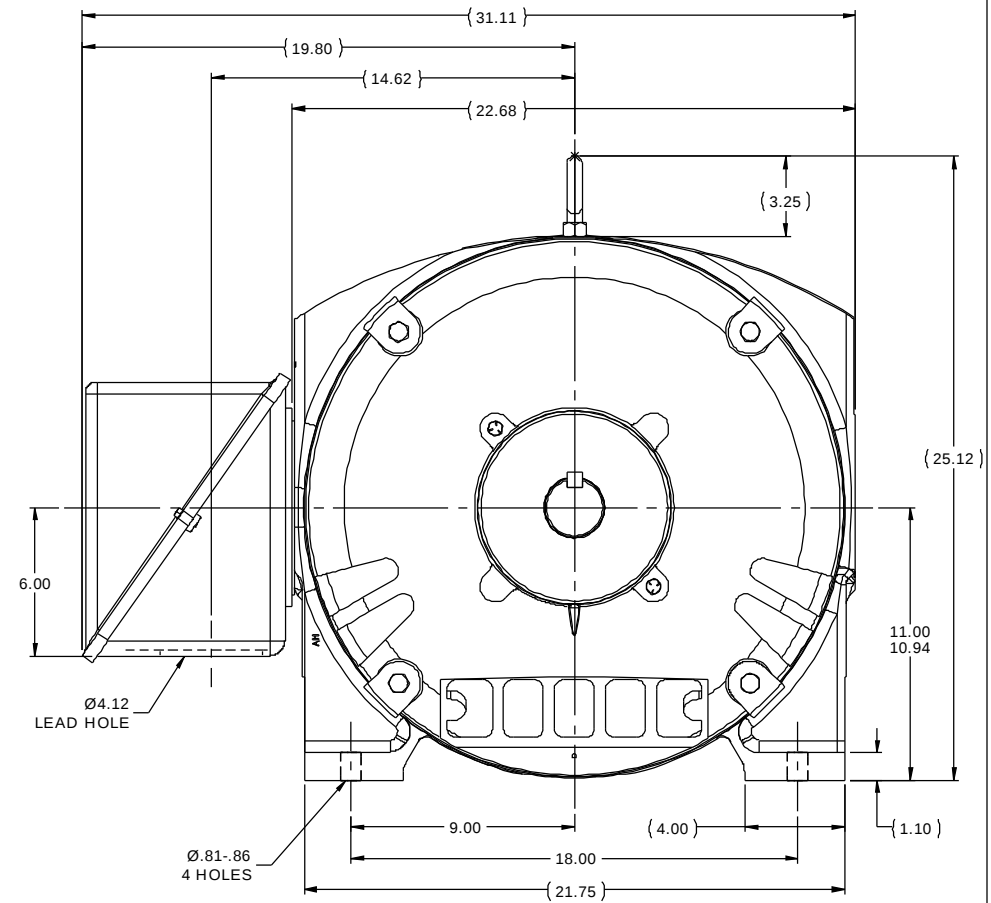


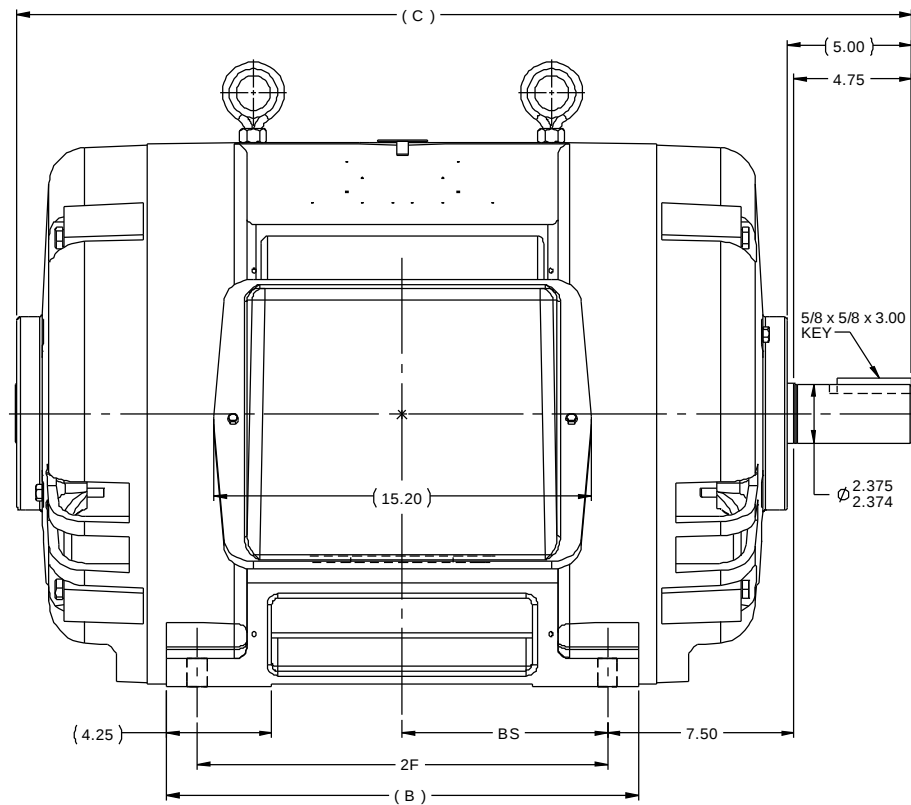

NOTES:

1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.
2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.
3. NAMEPLATES TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

DASH	FRAME	B	C	2F	BS
1850	444TS	17.00	34.00	14.50	7.25
2050	445TS	19.00	36.00	16.50	8.25

				TOLERANCES UNLESS SPECIFIED				DRAWN KL 07-31-2007	
				DEC INCHES				CHK GFH 07-31-2003	
				X ±.1				APPR JES 07-31-2003	
				XX ±.03		TITLE OUTLINE		SCALE 1:5	
2		UPDATED TO CURRENT STD'S. MU114528		JJ8 08-01-2013		TDB XXX ±.005		444/445TS FR. - DR. PR. STD.	
1		NEW DRAWING MU47677		KL 07-31-2007		XXXX ±.0005		MAT'L	
NO		REVISION		BY & DATE		CHK ANG ±1/2°		FINISH	
						RFP 07-31-2003		PREV	
						NETWORK FILE NAME SS509642LN		PAGE OF	
								SIZE B	
								DRAWING NO SS509642LN	
								REV 2	

THIRD ANGLE
PROJECTION

