


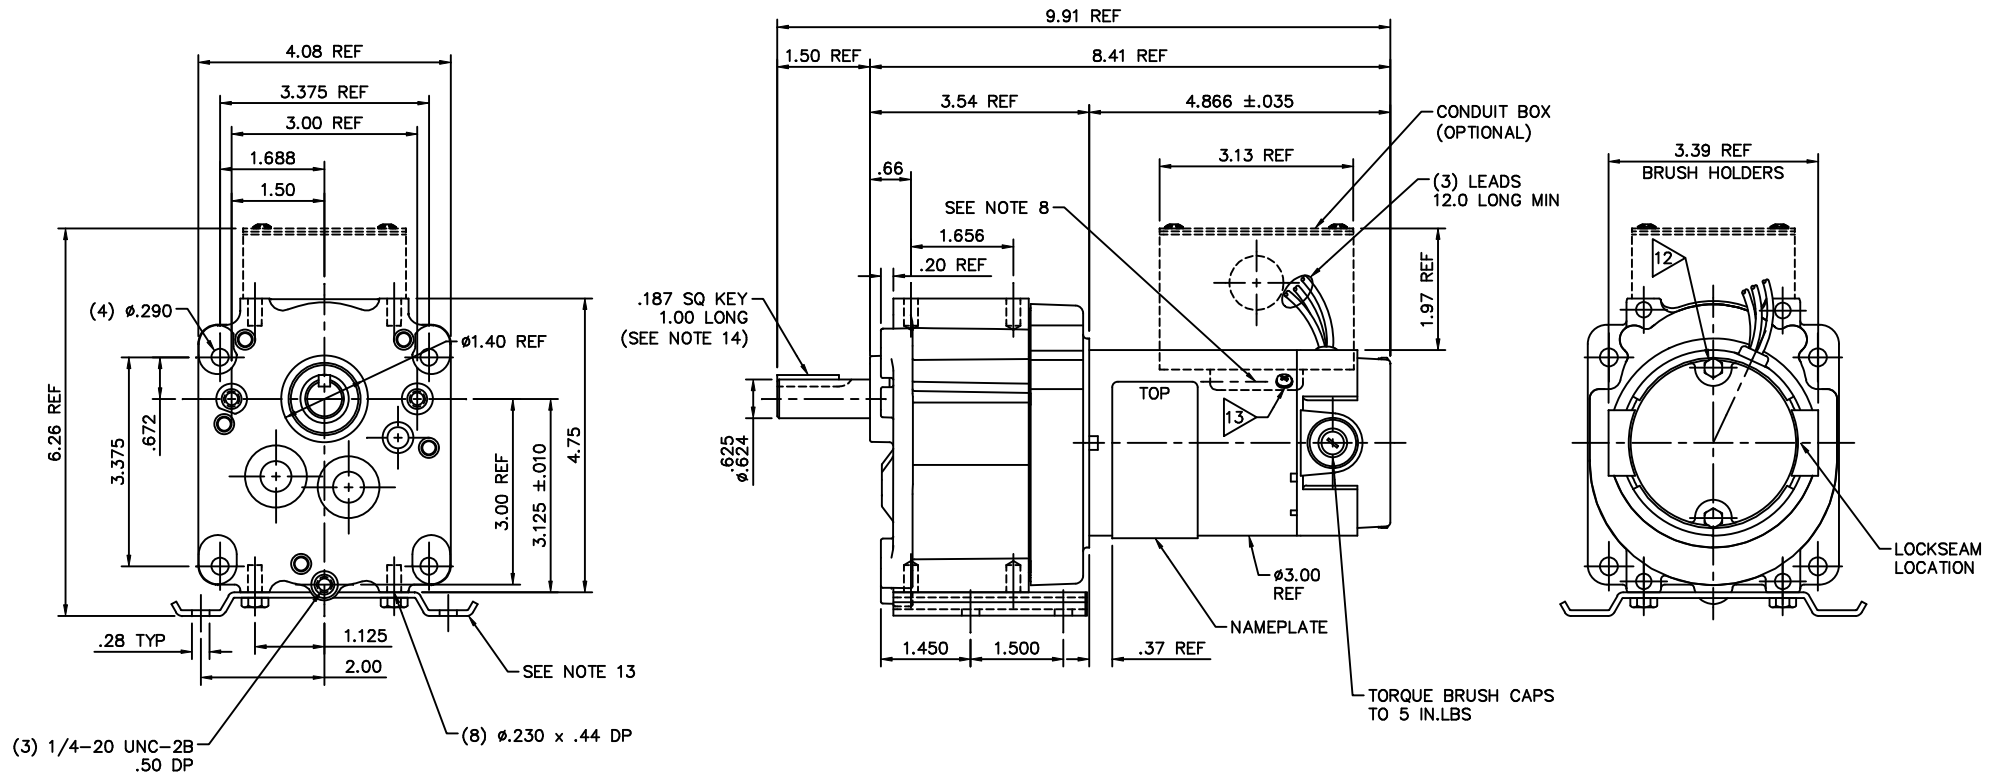

NOTES:

1. ROTATION: REVERSIBLE
2. HIPOT: PER CHART FOR ONE SECOND; RED & BLACK LEADS TO CASE
3. LEADS: 14 Ga.
4. BEARINGS: BALL BEARINGS BOTH ENDS
5. CASTINGS: GEARBOX-DIE CAST ALUMINUM, REAR ENDCAP-DIE CAST ZINC
6. MAGNET TUBE: ZINC PLATED STEEL
7. INSULATION: CLASS F 155°C
8. NAME PLATE MUST BE IN LINE WITH HOLE WITHIN .06"
9. TEST AND LUBRICATE GEARBOX PER 890.178
10. PAINT PER DRAWING # PP985.6XX
11. PACKAGE FOR SHIPMENT PER 890.179
12. TORQUE THURBOLTS TO 20-25 IN-LB
13. INSTALL BRACKET & CONDUIT BOX SCREWS AT FINAL ASSEMBLY BEFORE PAINTING

MODEL No.	VOLTAGE	CATALOG No.	TYPE	RATIO	TORQUE	HP	RPM
985.657	12VDC	M1125217.00	DN	336:1	353 IN.LB.	1/20	5

08	REMOVED RUBBER BAND NOTE FOR KEY.	ECR83951	RPB	12/5/03	BC	TOLERANCES UNLESS SPECIFIED		ELECTRIC MOTORS GEARMOTORS AND DRIVES	DRAWN	SMB	11/10/03	
07	REDRAWN TO CURRENT STANDARDS PER ECR 81842		SMB	11/10/03	IPG	DEC. INCHES			CHK	IPG	11/10/03	
06	GREEN/YELLOW STRIPE GROUND LEAD WAS 18 GA.		SMB	11/10/03	IPG	.X ±.1			APPD			
	PER ECR 81841					.XX ±.03	TITLE OUTLINE			SCALE	1=2	
05	REMOVED FLAT FROM OUTPUT SHAFT:		JKM	11/11/02		.XXX ±.005	30 FRAME DC - P300 GEARBOX			REF		
	ADDED BRACKET AND CONDUIT BOX TO LEFT VIEW					.XXXX ±.0005	MAT'L			FMF	M1125217.00	
NO.	REVISION			BY & DATE	CHK	ANG	±1/2"		FINISH			PREV
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK. ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED. THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT						RFP	CAD FILE		M1125217000L	SIZE	DRAWING NO.	REV.
						DIST				B	M1125217.000L	08

ERROR: syntaxerror
OFFENDING COMMAND: --nostringval--

STACK:

-dictionary-
-dictionary-
/Pscript_WinNT_Compat
-dictionary-