


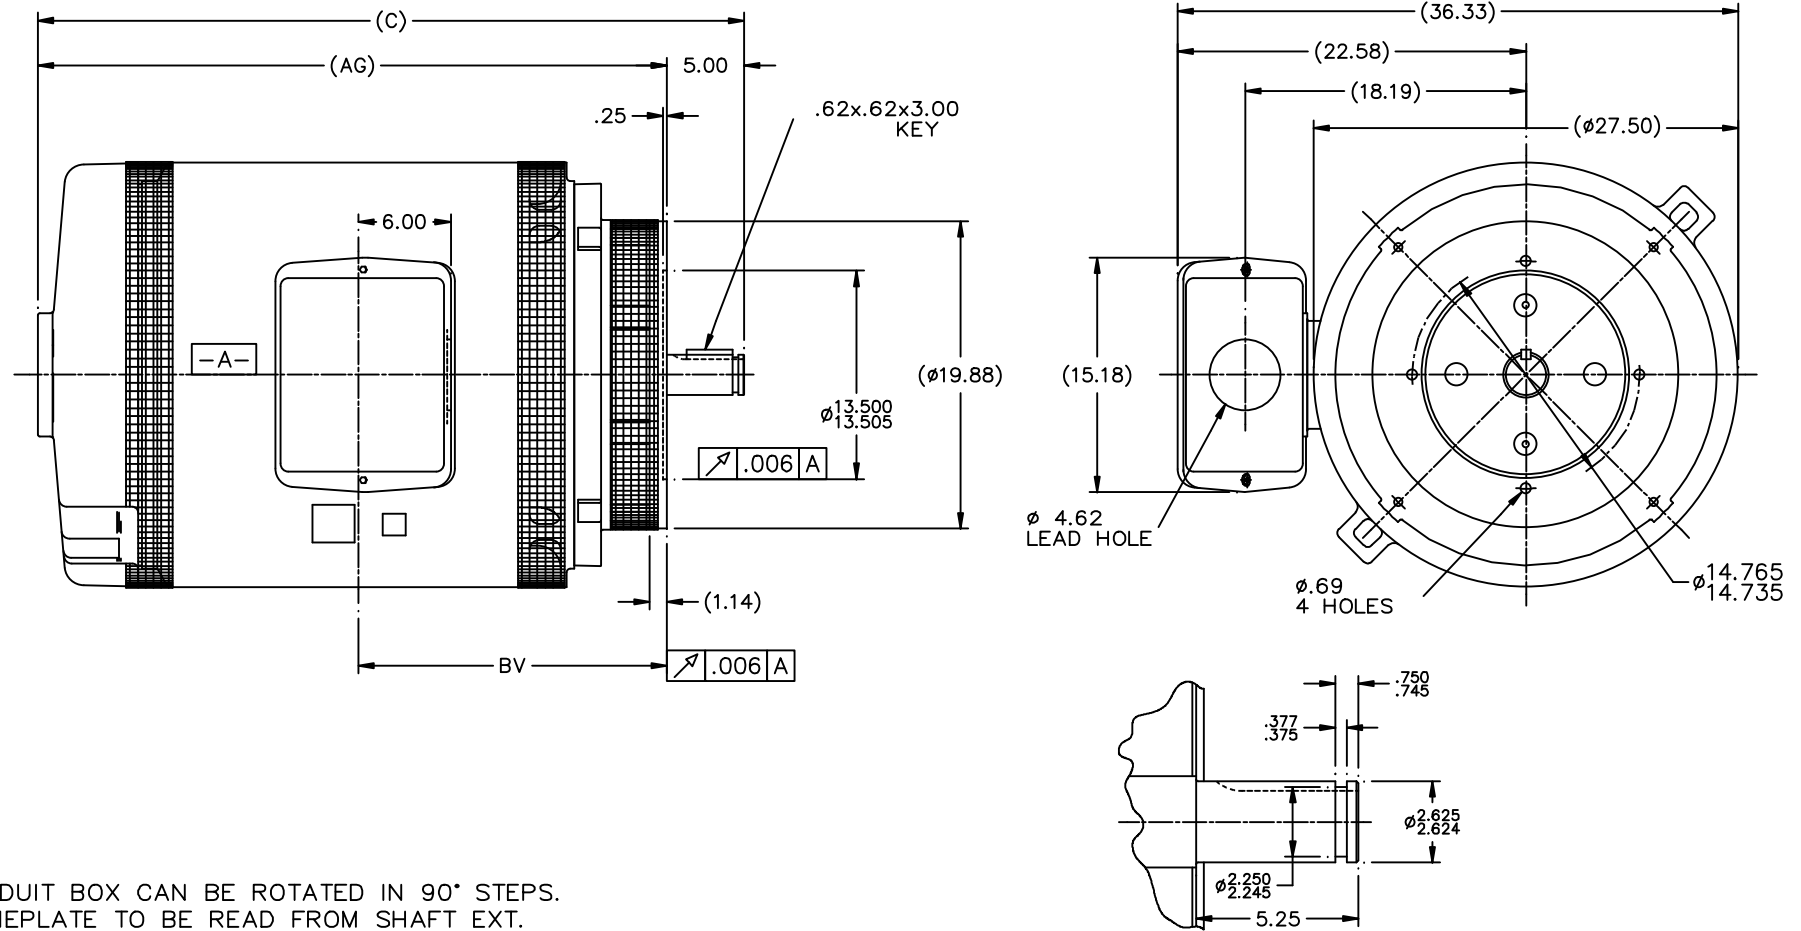

NOTES:

1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.
2. NAMEPLATE TO BE READ FROM SHAFT EXT. END OF MOTOR

DRAWN TO DASH 2800

DASH	FRAME	C	AG	BV
2100	505P	38.75	33.75	16.50
2800	508P	45.75	40.75	20.00

		TOLERANCES UNLESS SPECIFIED		MARATHON ELECTRIC	DRAWN SMC 08-01-1991
		DEC.	INCHES		
5	UPDATED C'BOX GEOMETRY	DRS	.X ±.1	TITLE OUTLINE - SCREENED 500P FR. - BB - TS - DR.PR. - P'BASE	CHK ML 08-01-1991
4	REVISED TO CORRECT FRONT BRACKET VIEW MU15347	KL 06-11-1997	.XX ±.03		APPD GK 08-01-1991
3	REDRAWN FOR CLARITY	SMC 08-01-1991	.XXX ±.005		SCALE 1=8
NO.	REVISION	BY & DATE	CHK ANG ±.0005	MAT'L	REF
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT				FINISH	PREV
RFP				CAD FILE ss510025	SIZE B
DIST WA					DRAWING NO. SS510025
					PAGE OF 5
					REV. 5