


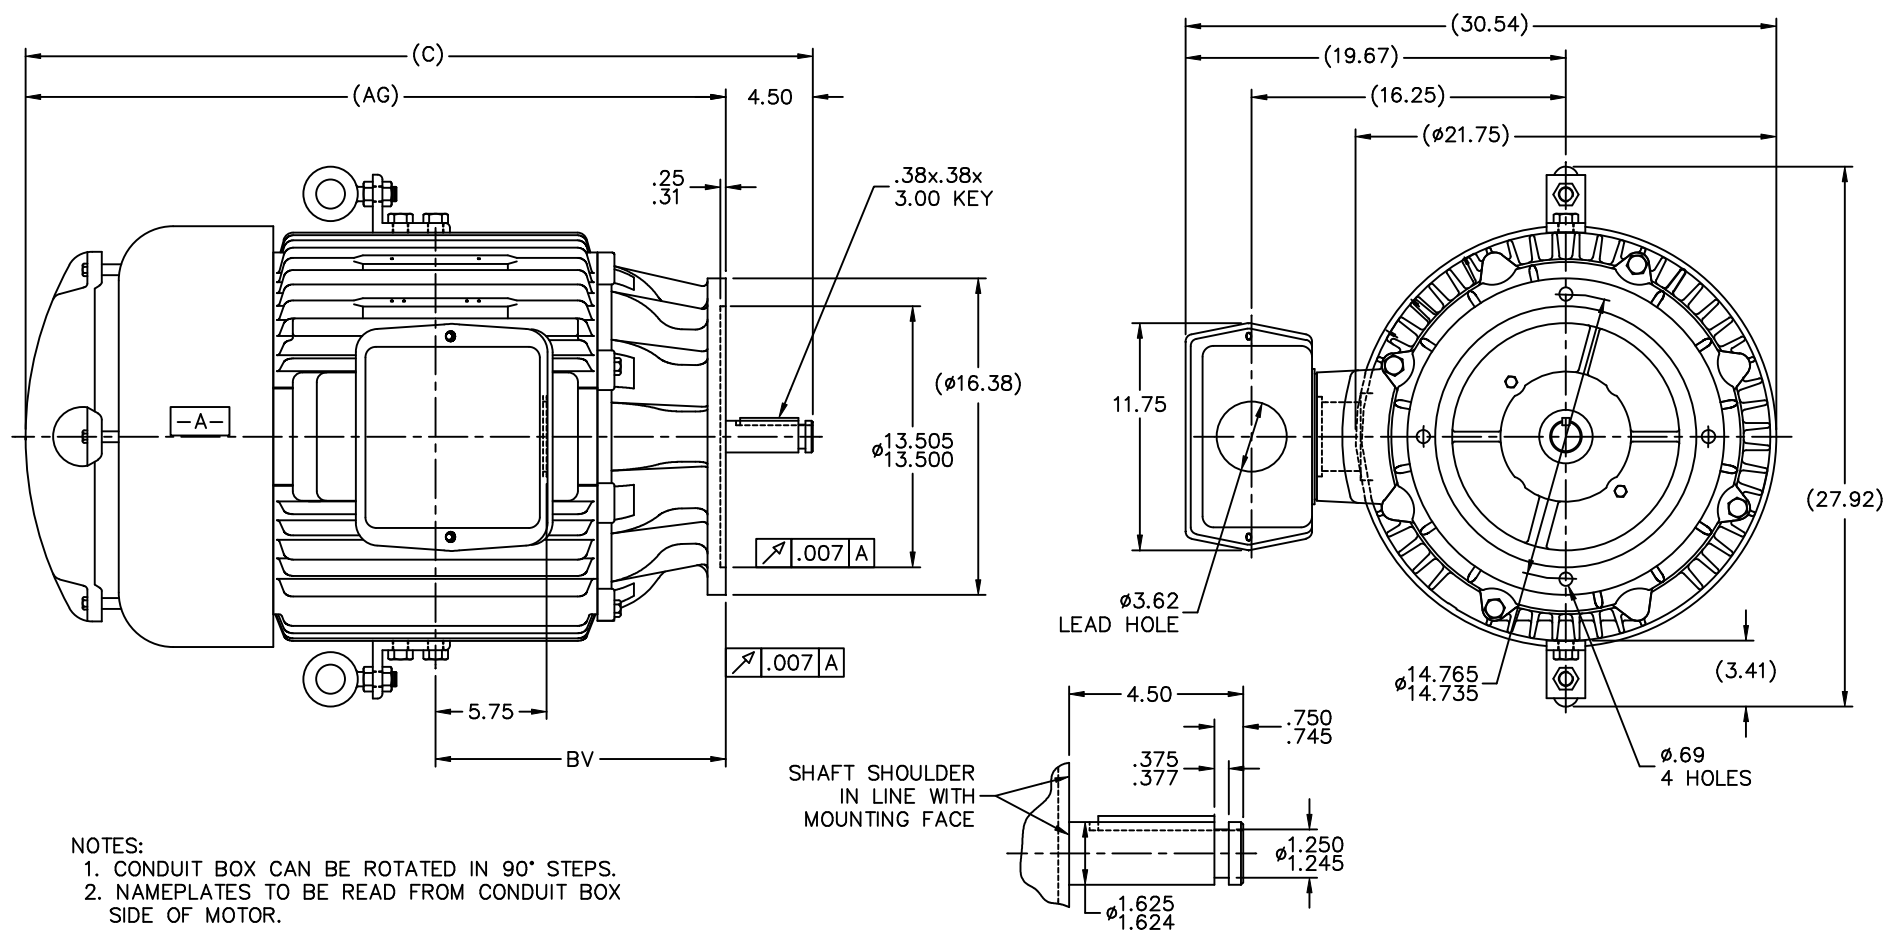

NOTES:

1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.
2. NAMEPLATES TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.
3. MAX. SHAFT RUNOUT .003
4. MAX. SHAFT ENDPLAY .015

DETAIL OF SHAFT EXTENSION

(B-SS509326)

						TOLERANCES UNLESS SPECIFIED		MARATHON ELECTRIC	DRAWN DD 04-28-1993			
						DEC.	INCHES		CHK	ML	04-29-1993	
						.X	±.1		APPD	TB	04-30-1993	
						.XX	±.03		SCALE 5-32			
						.XXX	±.005		REF			
						.XXXX	±.0005		FMF			
						CHK	ANG	±7°30"	PREV			
						RFP	CAD FILE SS508404		SIZE	DRAWING NO.	PAGE	OF
						DIST	WA		B	SS508404	4	

DASH	FRAME	C	AG	BV	
1675	400HPV	40.69	36.19	15.00	

NO.	REVISION	BY & DATE
4	REMOVED GROUND LUG MU44395	KL 12-12-2002
3	REDRAWN ON CADD	DD 04-30-1993

THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT

ERROR: syntaxerror
OFFENDING COMMAND: --nostringval--

STACK:

-dictionary-
/Pscript_WinNT_Compat
-dictionary-