
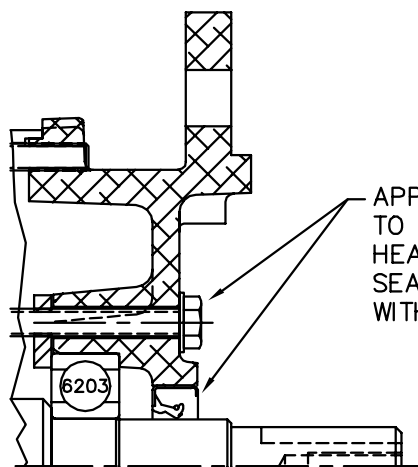
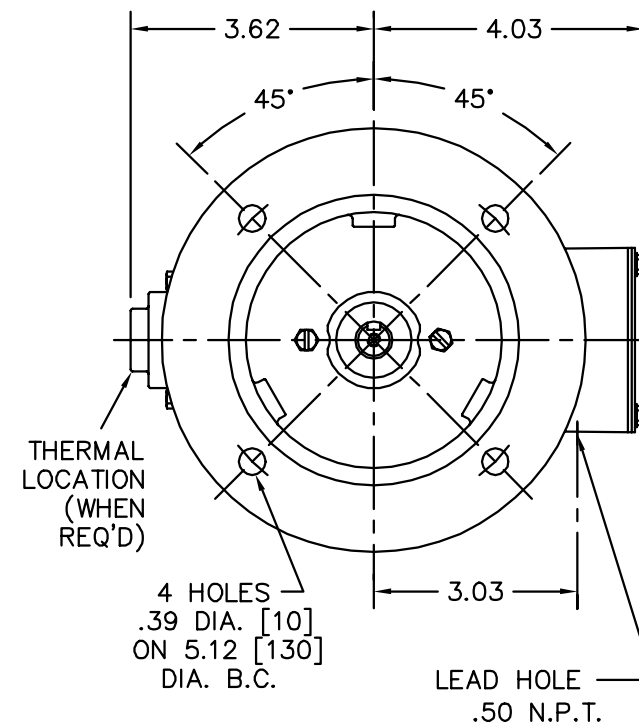


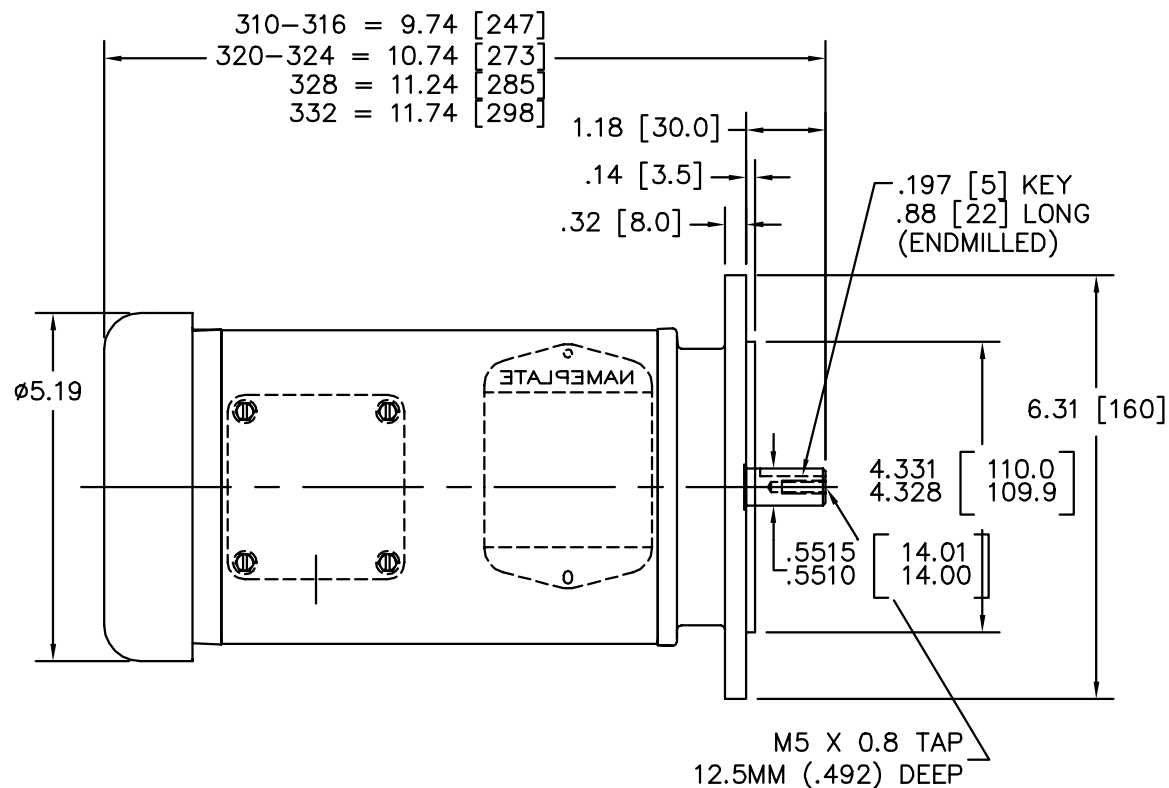

APPLY COAT OF RED SEALER  
 TO HOUSING AND UNDER SCREW  
 HEADS BEFORE PRESSING SEAL IN.  
 SEAL MUST BE PRESSED IN  
 WITH LIP OUT.

### SEAL DETAIL PULLEY END

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT MOTOR PERFORMANCE IS SUITABLE IN THE APPLICATION.

REV. DESC: CHG'D OVERALL DIMS DUE TO REVISED FH

REV. LTR: C BY: BWB REVISED: 08:26:50 05/02/2002 TDR: 258278

8313A73C

FILE: AAA00050772

REF: 33LYE138

MTL: -

## BALDOR ELECTRIC Co.

STD. VERT MODEL 33M IEC D71D TEFC F-2 MTG. W/SEAL