
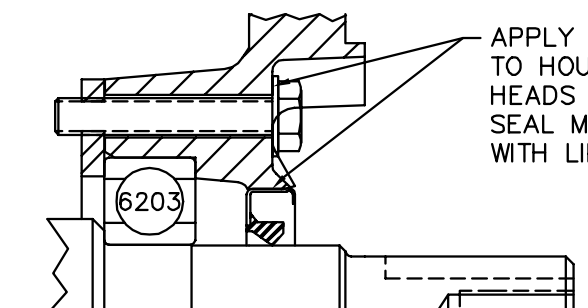
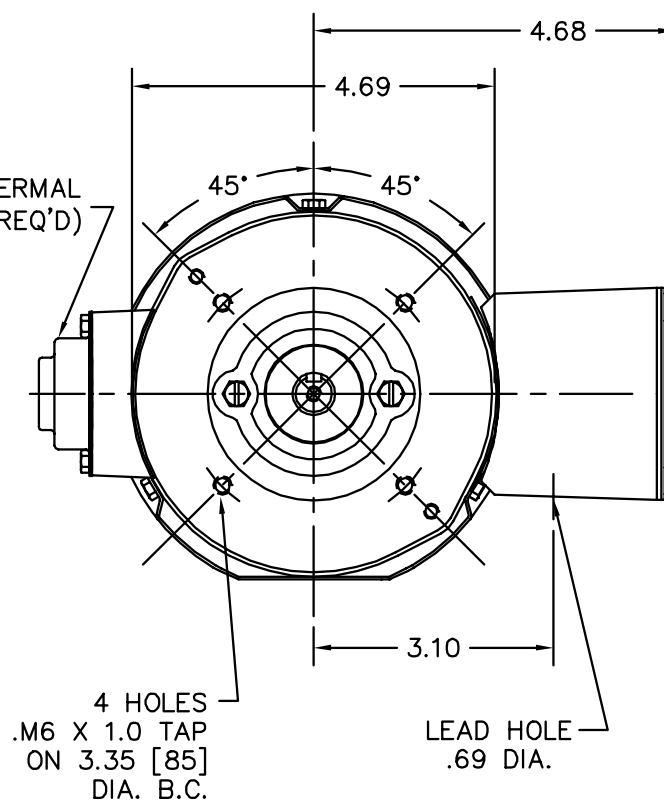


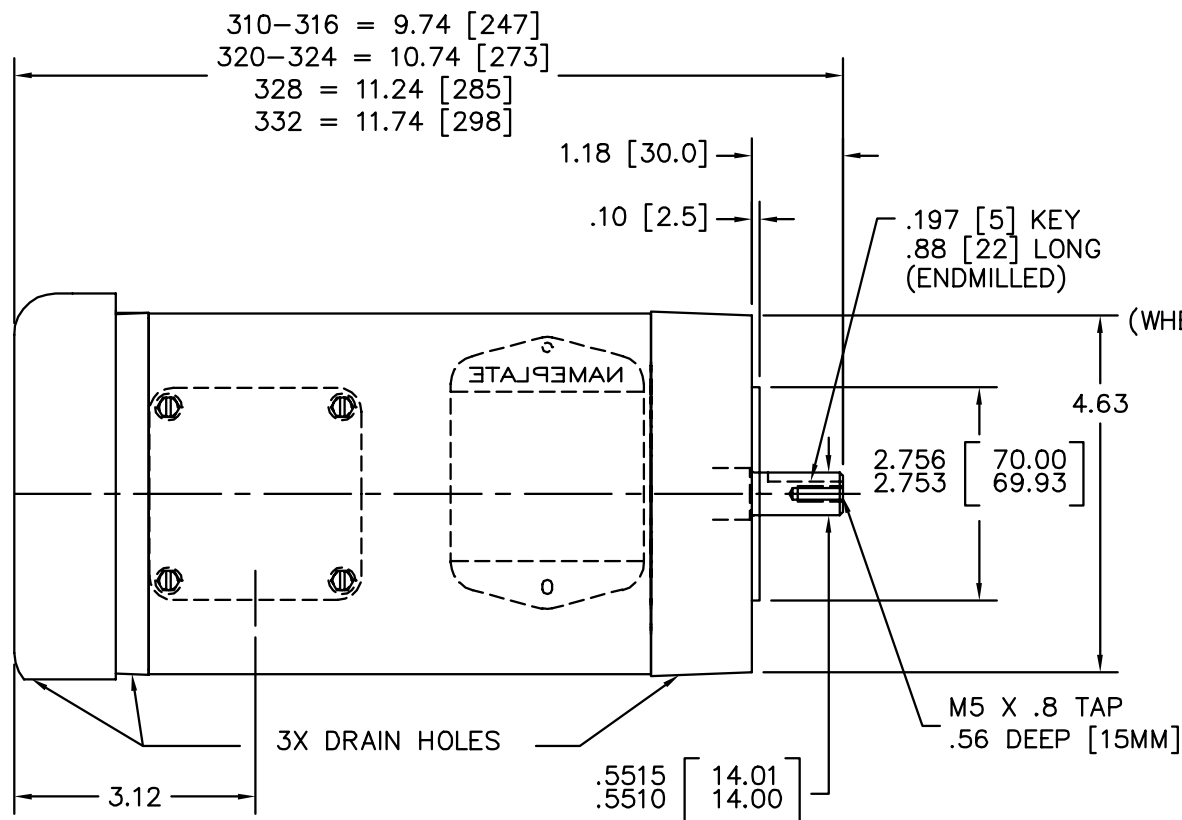

APPLY COAT OF RED SEALER  
 TO HOUSING AND UNDER SCREW  
 HEADS BEFORE PRESSING SEAL IN.  
 SEAL MUST BE PRESSED IN  
 WITH LIP OUT.

SEAL DETAIL  
 PULLEY END

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: SHOW DRAIN HOLES

REV. LTR: F

VERSION: 03

TDR: 000000709312

FILE: \CKA\00035\062

REVISED: 07: 40: 29 08/23/2011

MTL: -

BY: CKAPRBO

**BALDOR • DODGE • RELIANCE**

STD. VERT 33M IEC D71C TEFC F-2 MTG W/SEAL

SH 1 of 2