
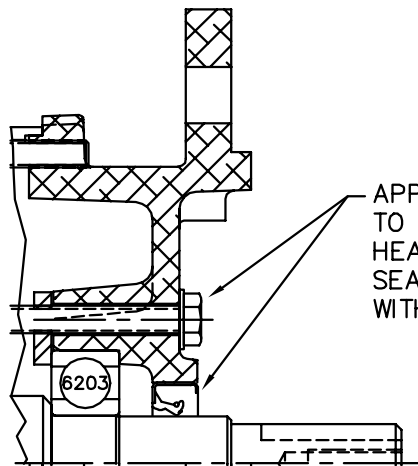
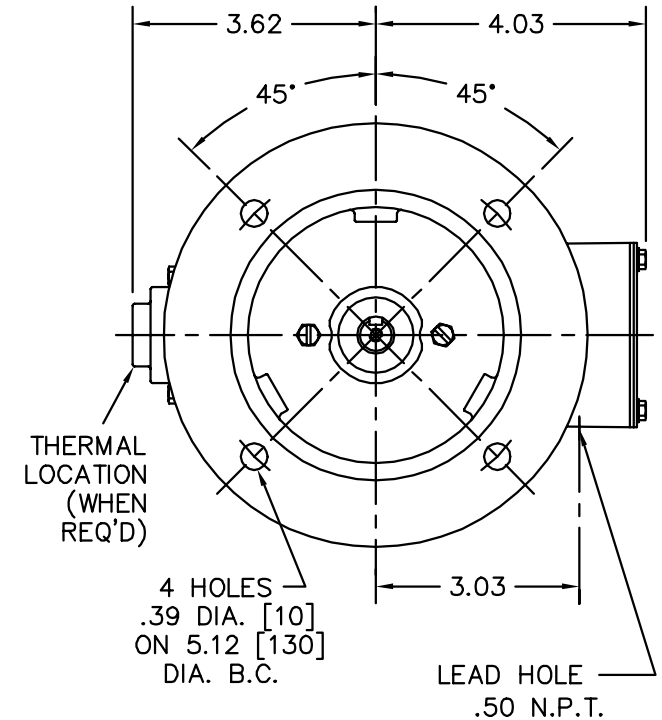


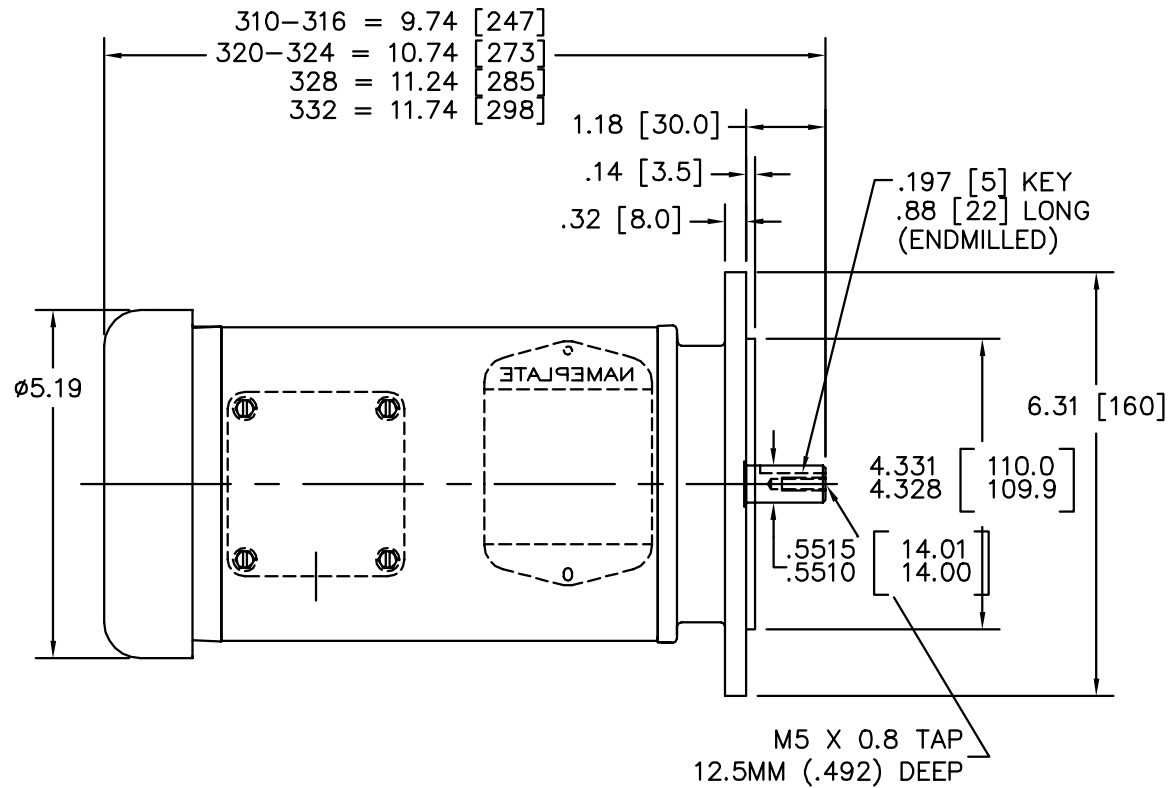

APPLY COAT OF RED SEALER
 TO HOUSING AND UNDER SCREW
 HEADS BEFORE PRESSING SEAL IN.
 SEAL MUST BE PRESSED IN
 WITH LIP OUT.

SEAL DETAIL PULLEY END

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT MOTOR PERFORMANCE IS SUITABLE IN THE APPLICATION.

REV. DESC: CHG'D OVERALL DIMS DUE TO REVISED FH

REV. LTR: C BY: BWB REVISED: 08:26:50 05/02/2002 TDR: 258278

8313A73C

FILE: AAA00050772

REF: 33LYE138

MTL: -

BALDOR ELECTRIC Co.

STD. VERT MODEL 33M IEC D71D TEFC F-2 MTG. W/SEAL