
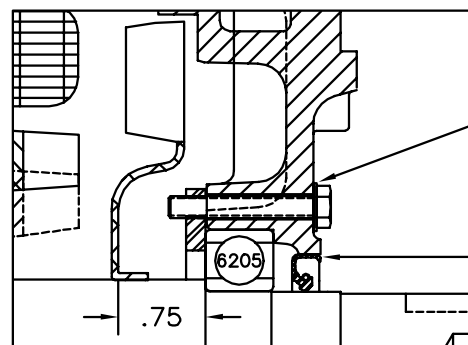
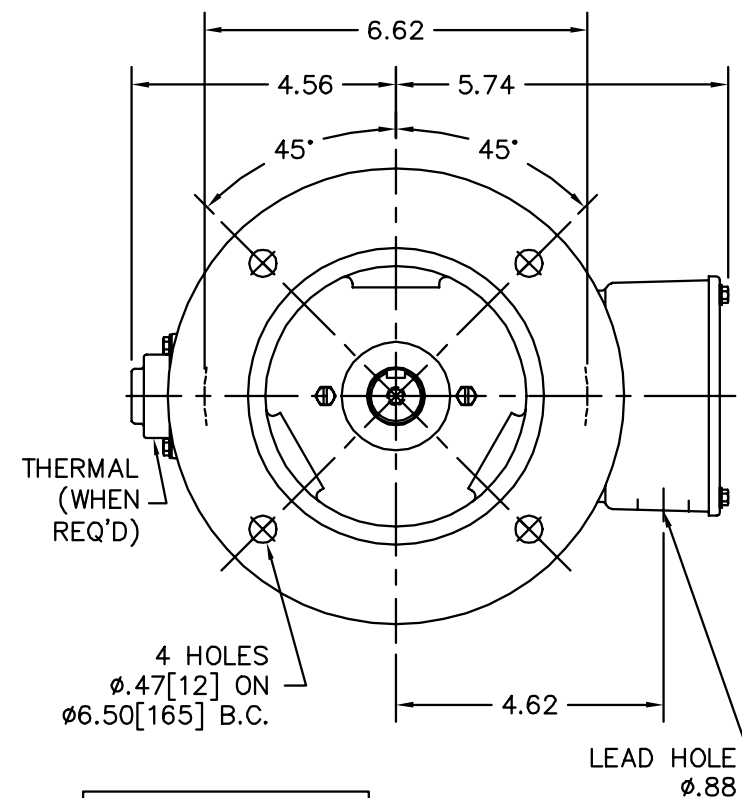


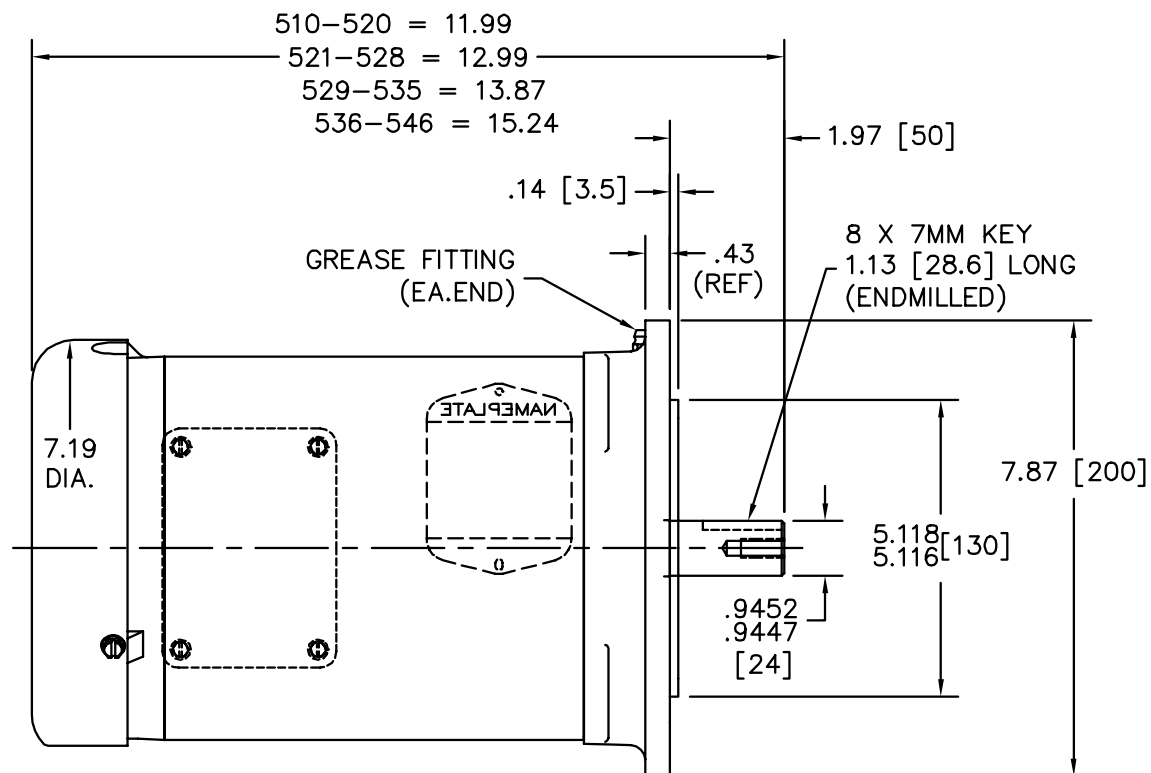


PULLEY END DETAIL

OMIT LOCKWASHER & COAT
 UNDER SCREW HEAD WITH
 SEALER BEFORE INSTALLING.

APPLY COAT OF SEALER
 TO HOUSING BEFORE PRESSING
 IN SEAL. SEAL MUST BE
 PRESSED W/LIP OUT.

M8 x 1.25 TAP
 .75 [19] DEEP



KEYWAY DETAIL

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: REMOVE RED FROM PULLEY END DESCRIPTION

REV. LTR: G

VERSION: 03

TDR: 000000877506

FILE: \AAA\00050\737

REVISED: 02:40:36 10/24/2014

BY: ENFRAJO

MTL: -



BALDOR

VER D90SD, LD TEFC M F2 W/SEAL, SHORT STYLE PUEP

SH 1 of 1