

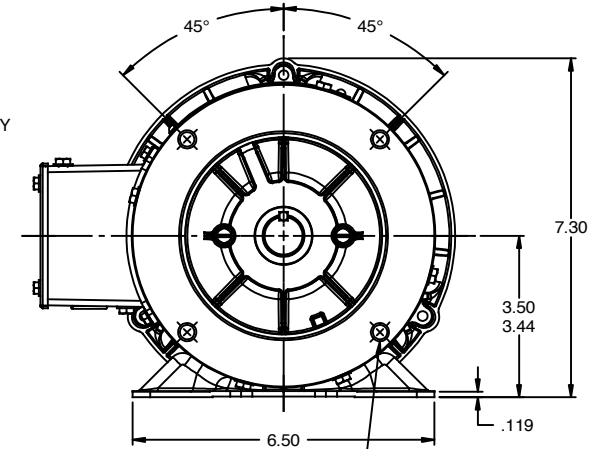
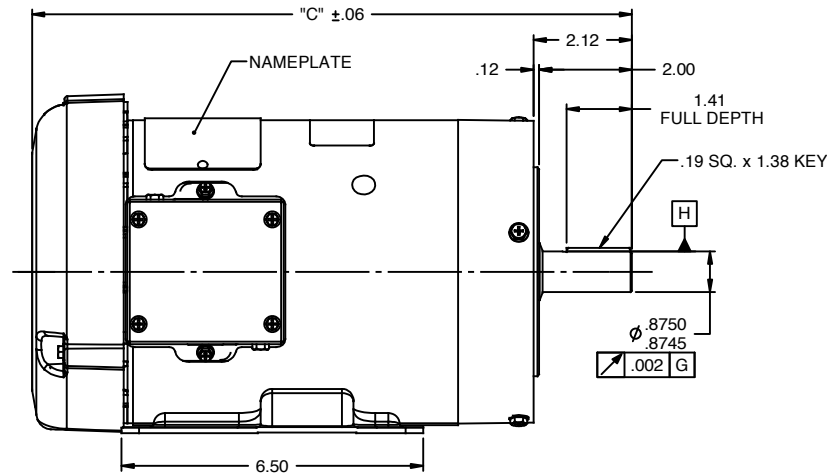


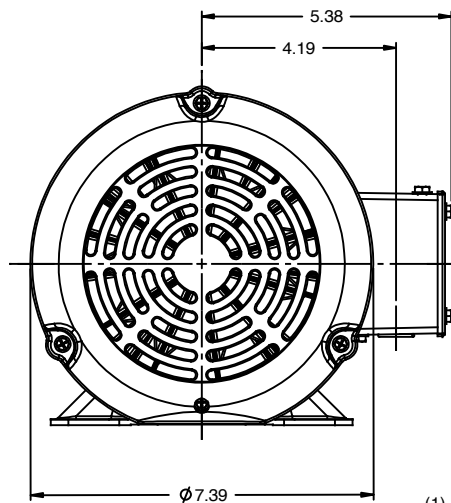

(1) 1/2-14 NPT CONDUIT HOLE
(PLUGGED)

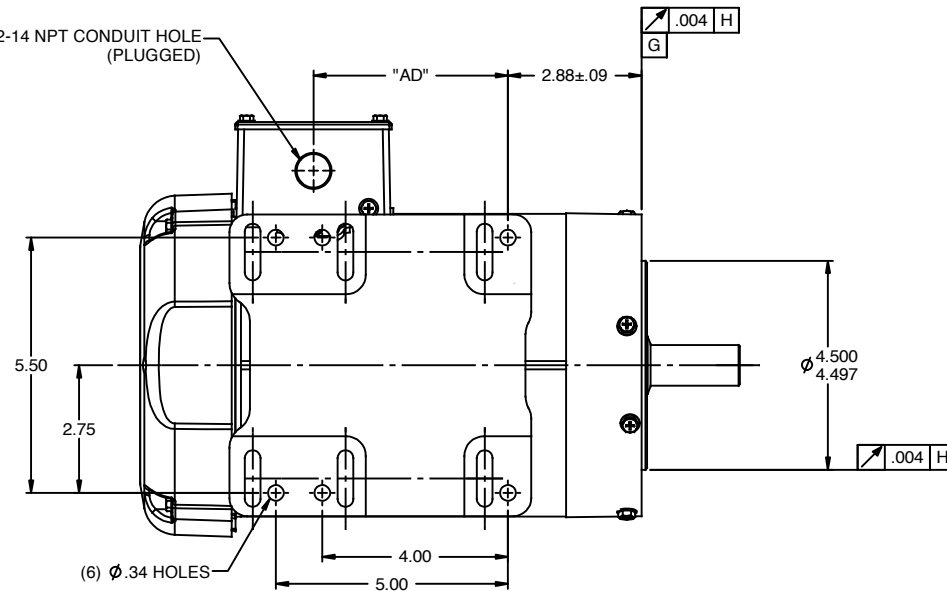


3/8-16 UNC-2B x .56 DEEP
(4) REQ'D. ON A Ø5.875 B.C.

WASHGUARD MOTOR

- SPECIAL FEATURES:
1. SHAFT SEALS & V-RING.
 2. PLUGGED DRAIN HOLES IN ENDBELLS & CONDUIT BOX.
 3. BUNA-N GASKETS THROUGHOUT.
 4. STAINLESS STEEL SHAFT, HARDWARE & NAMEPLATE.

DASH NO.	"C"	"AD"
700	12.93	4.19
750	13.43	4.69
775	13.68	4.94
800	13.93	5.19
850	14.43	5.69

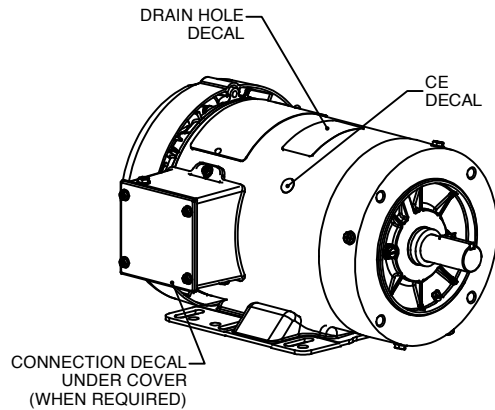

TOLERANCES UNLESS SPECIFIED				marathon [®] electric		DRAWN VS 4/21/2011	
DEC	INCHES					CHK	
X	±.1					APPR	
XX	±.03					SCALE	3:8
XXX	±.005					REF	607-0003
XXXX	±.0005					FMF	145TTVR5030
NO	REVISION	BY & DATE	CHK	ANG	±1/2"	FINISH	PAGE OF
			RFP			PREV	
						SIZE	DRAWING NO
						B	607-0018
							REV